

R6E355-AE16-05 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	R6E355-AE16-05		
Motor	M6E074-DF		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Method of obtaining data		fa	fa
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	870	890
Power consumption	W	70	90
Current draw	A	0.31	0.4
Capacitor	μF	2	2
Capacitor voltage	VDB	400	400
Capacitor standard		S0 (CE)	S0 (CE)
Min. back pressure	Pa	0	0
Min. back pressure	inH ₂ O	0	0
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	85	60
Starting current	A	0.4	0.42

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change




Technical description

Weight	4.3 kg
Fan size	355 mm
Rotor surface	Painted black
Impeller material	Sheet aluminum, laser-welded
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H0+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	EAC

AC centrifugal fan


backward-curved, single-intake

Product drawing

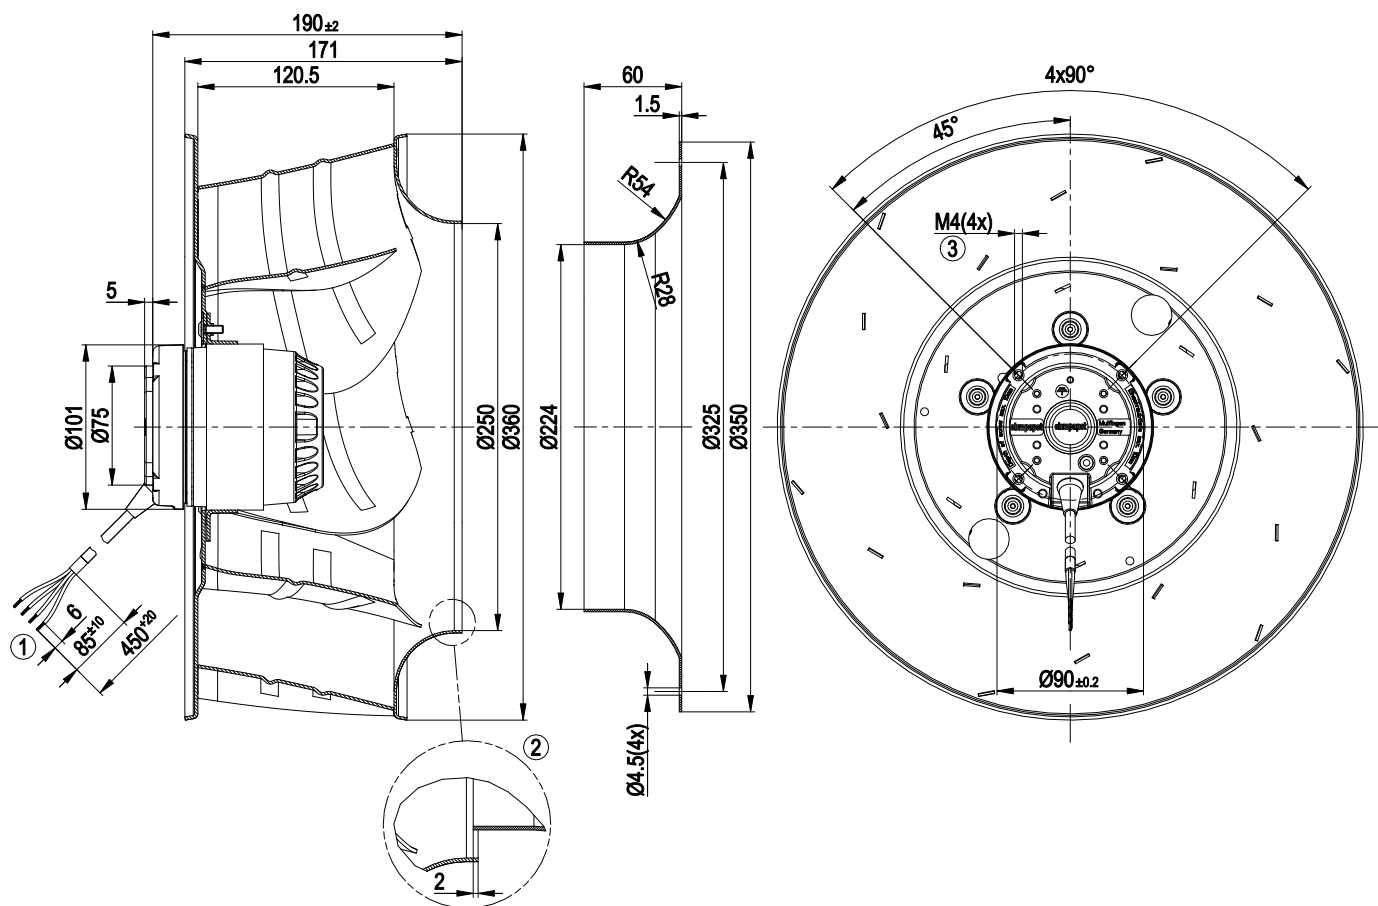

1	Cable silicone 4G x 0.5 mm ² , 4 x crimped splices
2	Accessory part: inlet ring 51357-2-4013 not included in scope of delivery
3	Max. clearance for screw 10 mm

Connection diagram




U1	blue	Z	brown	U2	black
PE	green/yellow				



AC centrifugal fan

backward-curved, single-intake

Curves: Air performance 50 Hz

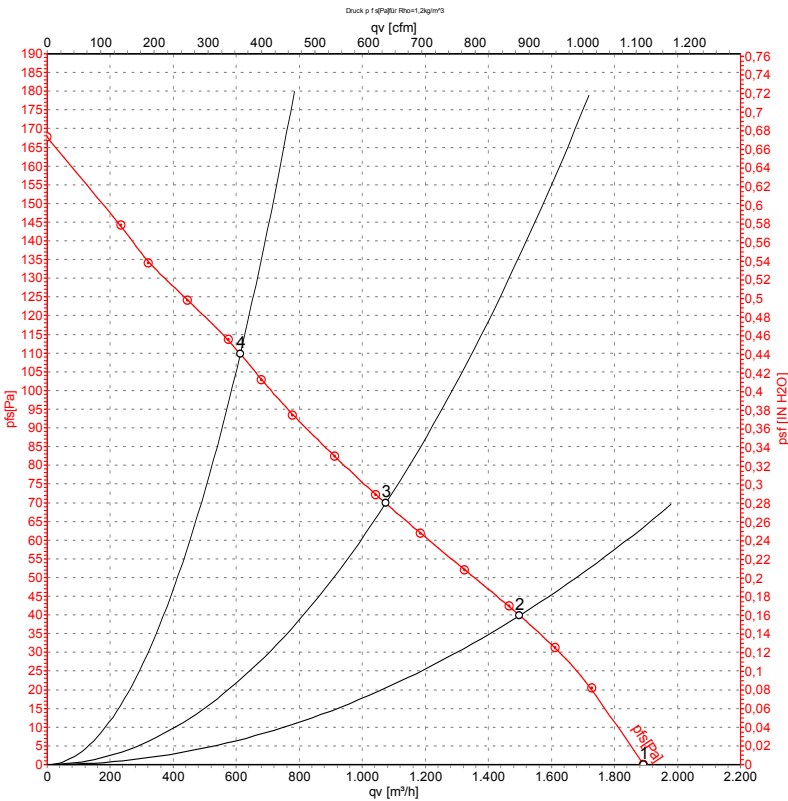

Measurement: LU-106541-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	230	50	870	70	0.31	1890	0	1115	0.00
2	230	50	785	80	0.35	1500	40	880	0.16
3	230	50	745	84	0.37	1075	70	630	0.28
4	230	50	805	78	0.34	615	110	360	0.44


U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase



AC centrifugal fan

backward-curved, single-intake

Curves: Air performance 60 Hz

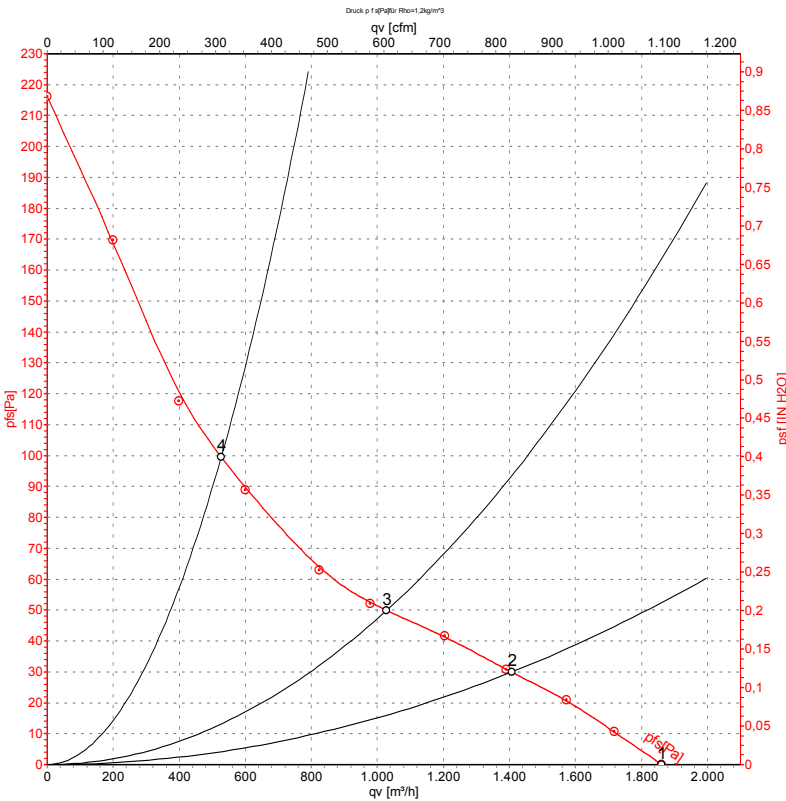

Measurement: LU-106543-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	230	60	890	90	0.40	1860	0	1095	0.00
2	230	60	720	95	0.41	1405	30	830	0.12
3	230	60	660	95	0.42	1030	50	605	0.20
4	230	60	755	94	0.41	525	100	310	0.40

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

