

S1G300-CA19-15

EC axial fan

sickled blades (S series)

ESM guard grille



S1G300-CA19-15 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
County court Stuttgart · HRB 590142

Nominal data

Type	S1G300-CA19-15		
Motor	M1G055-BI		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50/60	50/60
Type of data definition		-	ml
Speed	min ⁻¹	900	1250
Power input	W	-	35
Current draw	A		0.27
Max. back pressure	Pa		35
Min. ambient temperature	°C	-30	-30
Max. ambient temperature	°C	50	50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



EC axial fan

sickled blades (S series)

ESM guard grille

Technical features

Mass	1.4 kg
Size	300 mm
Material of blades	PA plastic
Material of guard grille	Plastic, epylen GT50
Number of blades	5
Direction of air flow	"A"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Speed selection max/min - Soft start - Over-temperature protected motor
Speed steps	2
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Lateral
Protection class	II
Product conforming to standard	CE
Approval	UL 2111; CSA C22.2 Nr.77




EC axial fan

sickled blades (S series)


ESM guard grille

Product drawing

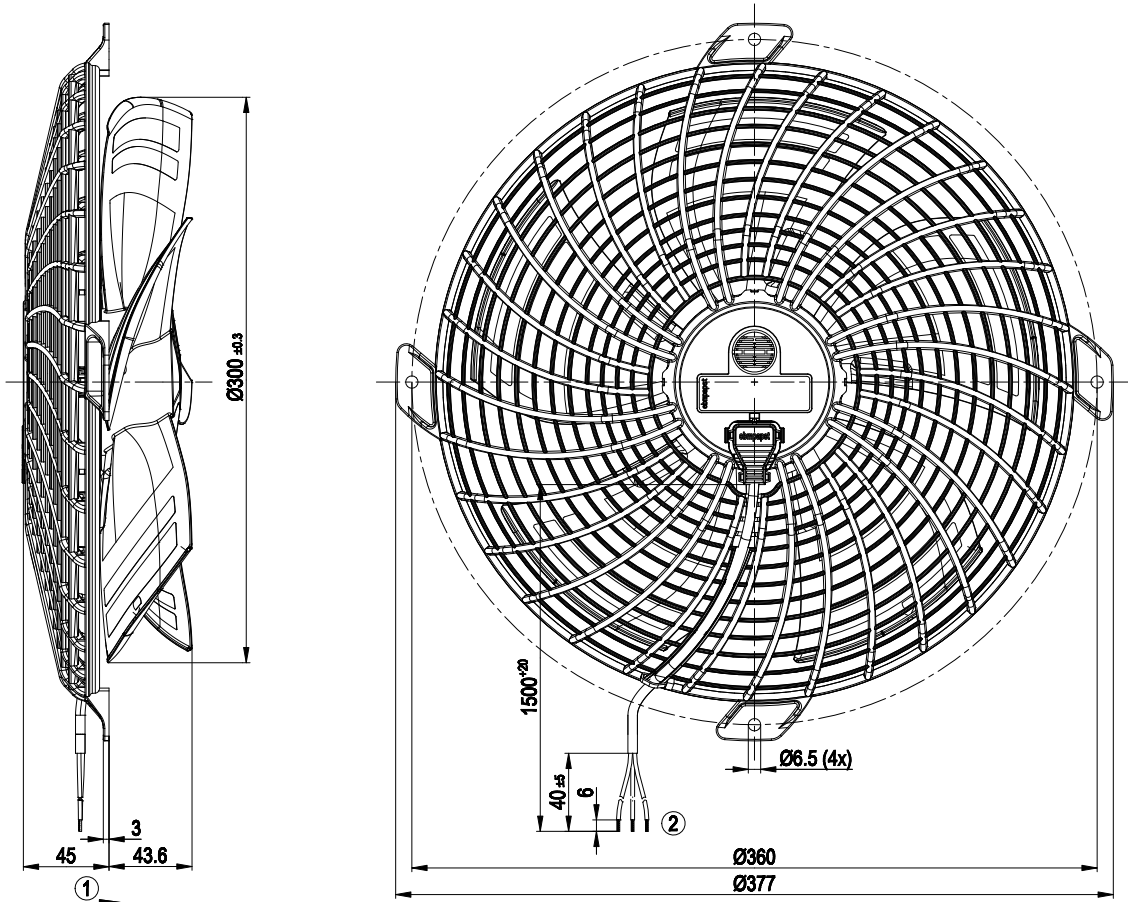


- 1 Direction of air flow "A"
- 2 Connection line AWG20; 3 x brass lead tips crimped

Connection screen

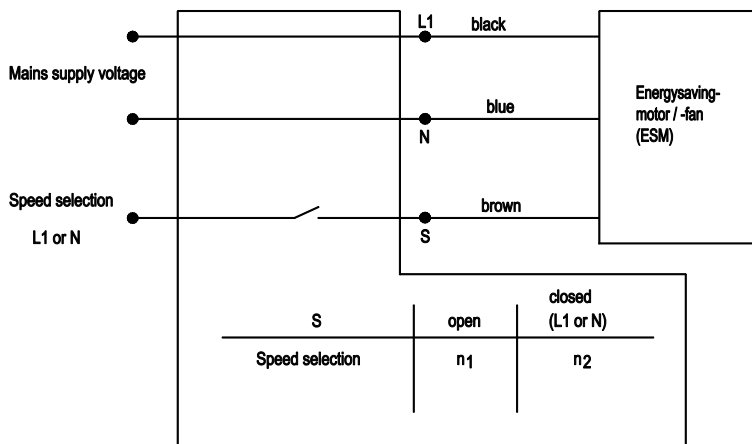

Charts: Air flow 50 Hz

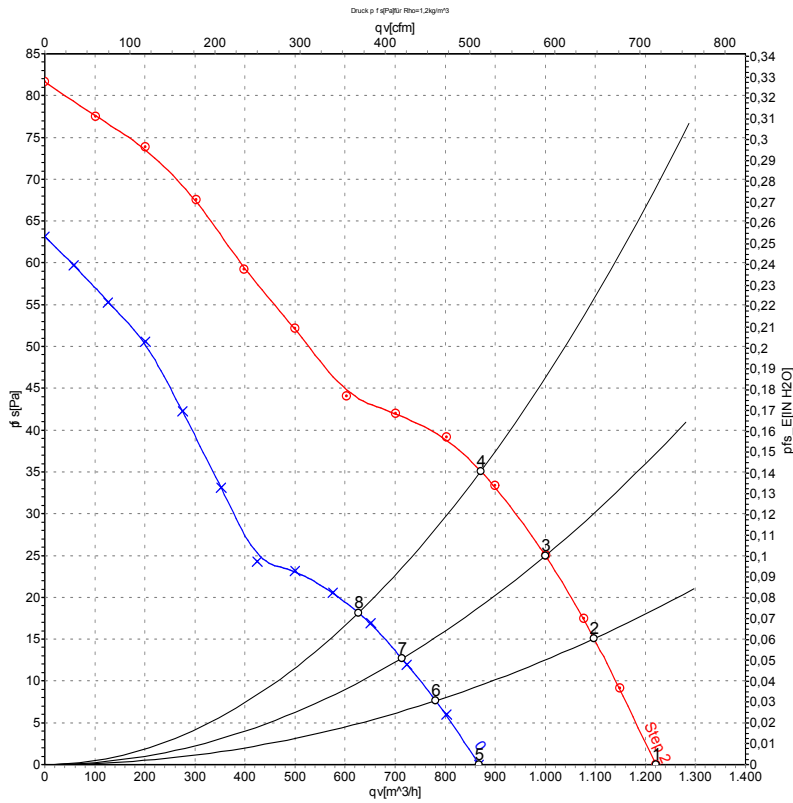

Measurement: LU-121373
Measurement: LU-121378

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Stage	U	f	n	P _{ed}	I	qv	P _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	2	230	50	1250	27	0.21	1220	0
2	2	230	50	1250	30	0.23	1095	15
3	2	230	50	1250	32	0.24	1000	25
4	2	230	50	1250	35	0.27	870	35
5	1	230	50	900	13	0.12	865	0
6	1	230	50	900	14	0.13	780	8
7	1	230	50	900	16	0.15	715	13
8	1	230	50	900	17	0.16	625	18

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · qv = Air flow · P_{fs} = Pressure increase

