

Nominal data

Type	S1G300-FN01-12		
Motor	M1G055-DF		
Phase		1~	1~
Nominal voltage	VAC	230	230
Nominal voltage range	VAC	200 .. 240	200 .. 240
Frequency	Hz	50/60	50/60
Method of obtaining data		ml	
Speed (rpm)	min ⁻¹	1400	1100
Power consumption	W	55	
Current draw	A	0.48	
Max. back pressure	Pa	40	
Max. back pressure	in. wg	0.16	
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	40	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC axial fan

sickle-shaped blades (S series)

ESM guard grille

Technical description


Weight	1.6 kg
Size	300 mm
Motor size	55
Rotor surface	Thick-film passivated
Blade material	Press-fitted sheet steel blank, sprayed with PP plastic
Guard grille material	PP plastic
Number of blades	5
Airflow direction	A
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54; only with suitable plug, to be installed by customer
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1+
Max. permitted ambient temp. for motor (transport/storage)	+ 70 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing with low-temperature lubricant
Technical features	- Speed setting input (230 V) - Power limiter - Motor current limitation - Soft start - Thermal overload protection for motor
Speed levels	2
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Electrical hookup	Plug
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	II
Conformity with standards	CE



EC axial fan


sickle-shaped blades (S series)
ESM guard grille

Product drawing

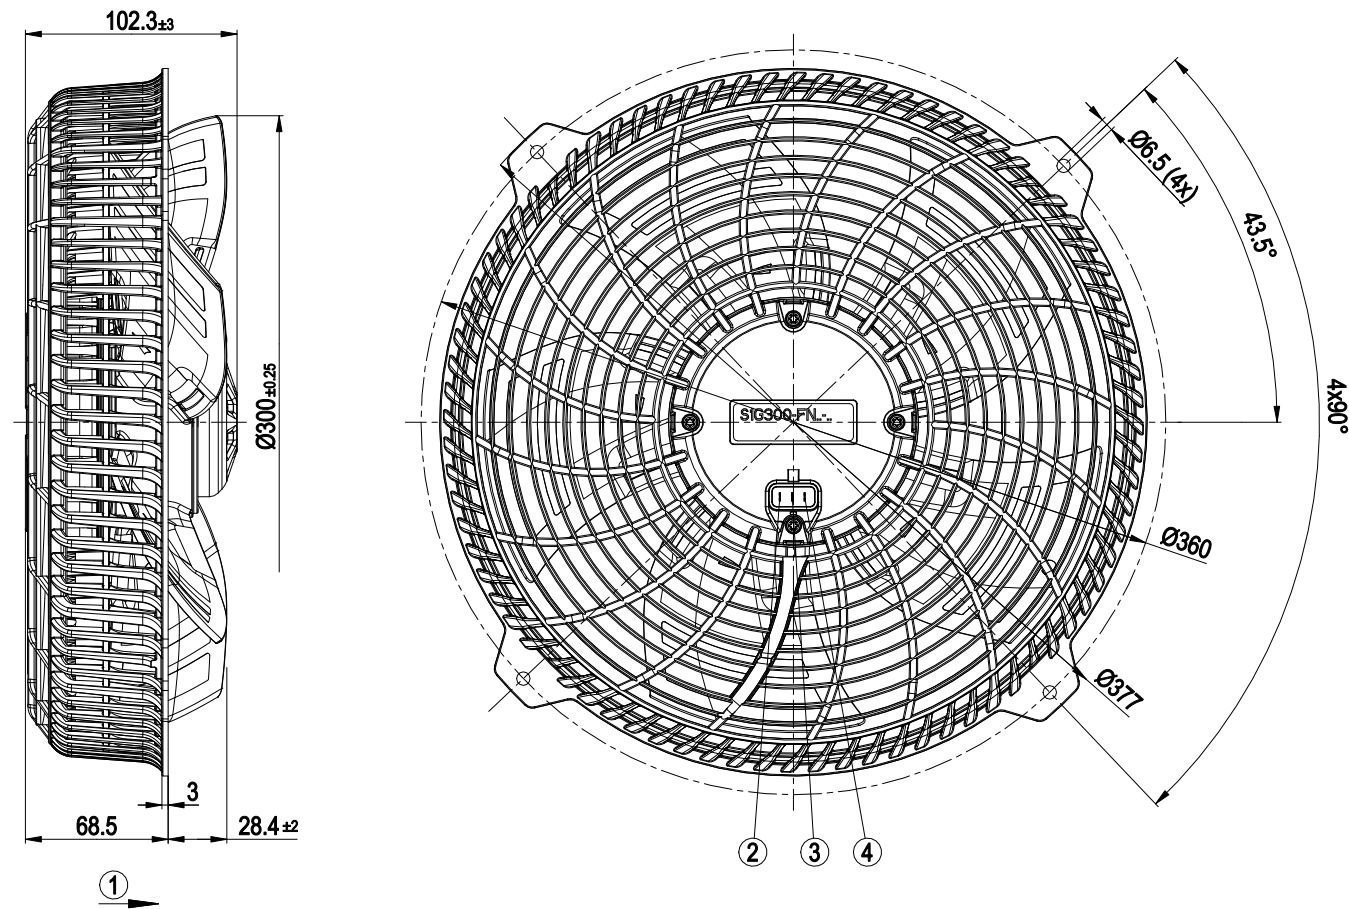


1	Direction of air flow "A"
2	Pin S, speed selection (flat plug 2.8 x 0.5)
3	Pin L1, phase (flat plug 2.8 x 0.5)
4	Pin N, neutral conductor (flat plug 2.8 x 0.5)

Connection diagram

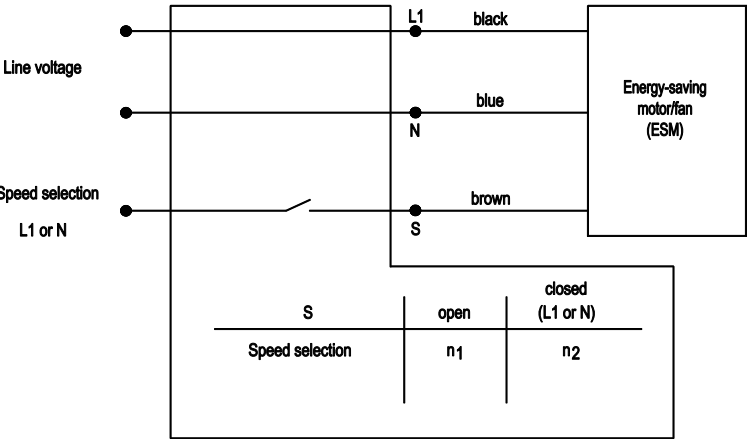

Curves: Air performance 50 Hz

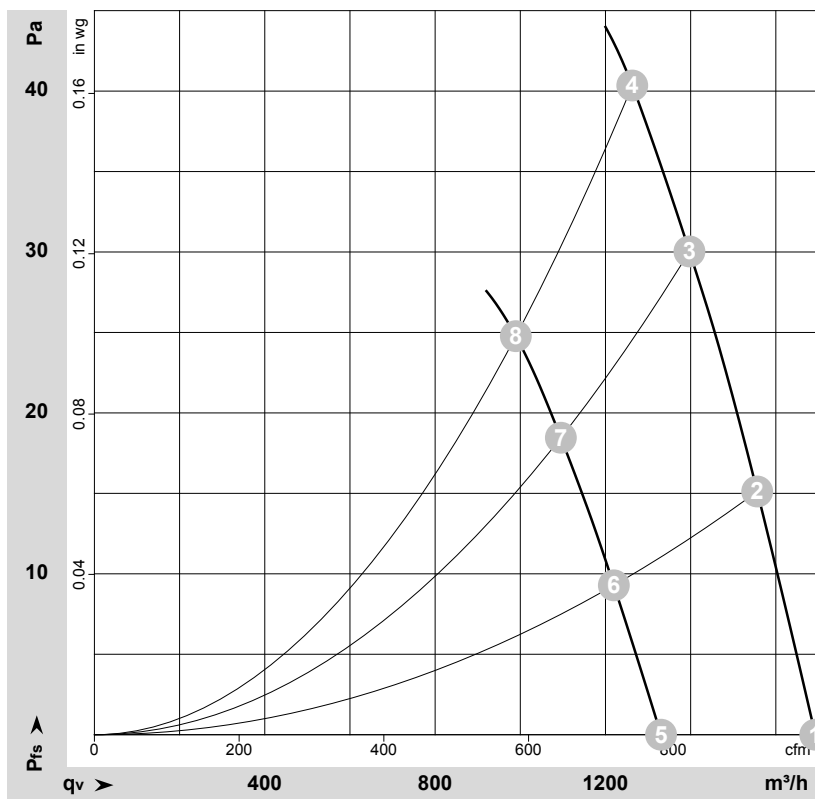

$$\rho = 1.176 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-184168-1
Measurement: LU-183972-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Stage	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1	230	50	1400	45	0.41	61	69	1695	0	995	0.00
2	1	230	50	1400	50	0.44	60	68	1555	15	915	0.06
3	1	230	50	1400	54	0.47	60	68	1395	30	820	0.12
4	1	230	50	1400	55	0.48	59	67	1265	40	745	0.16
5	2	230	50	1100	23	0.22	53	62	1330	0	785	0.00
6	2	230	50	1100	25	0.24	53	62	1220	10	720	0.04
7	2	230	50	1100	27	0.26	53	62	1095	19	645	0.08
8	2	230	50	1100	28	0.27	53	61	990	25	580	0.10

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

