

EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake
ESM guard grille

S1G300-GQ01-12 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	S1G300-GQ01-12				
Motor	M1G055-DF				
Phase		1~	1~	1~	1~
Nominal voltage	VAC	230	230	230	230
Nominal voltage range	VAC	200 .. 240	200 .. 240	200 .. 240	200 .. 240
Frequency	Hz	50/60	50/60	50/60	50/60
Method of obtaining data		ml			
Speed (rpm)	min ⁻¹	1600	1400	1200	1000
Power consumption	W	85			
Current draw	A	0.7			
Max. back pressure	Pa	50			
Max. back pressure	in. wg	0.2			
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	40	40	40	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake

ESM guard grille

Technical description

Weight	2 kg
Size	300 mm
Motor size	55
Rotor surface	Thick-film passivated
Blade material	Press-fitted sheet steel blank, sprayed with PP plastic
Guard grille material	PP plastic
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 70 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing with low-temperature lubricant
Speed levels	4
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Connector with cable
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Lateral
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	EAC




EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake

ESM guard grille

Product drawing

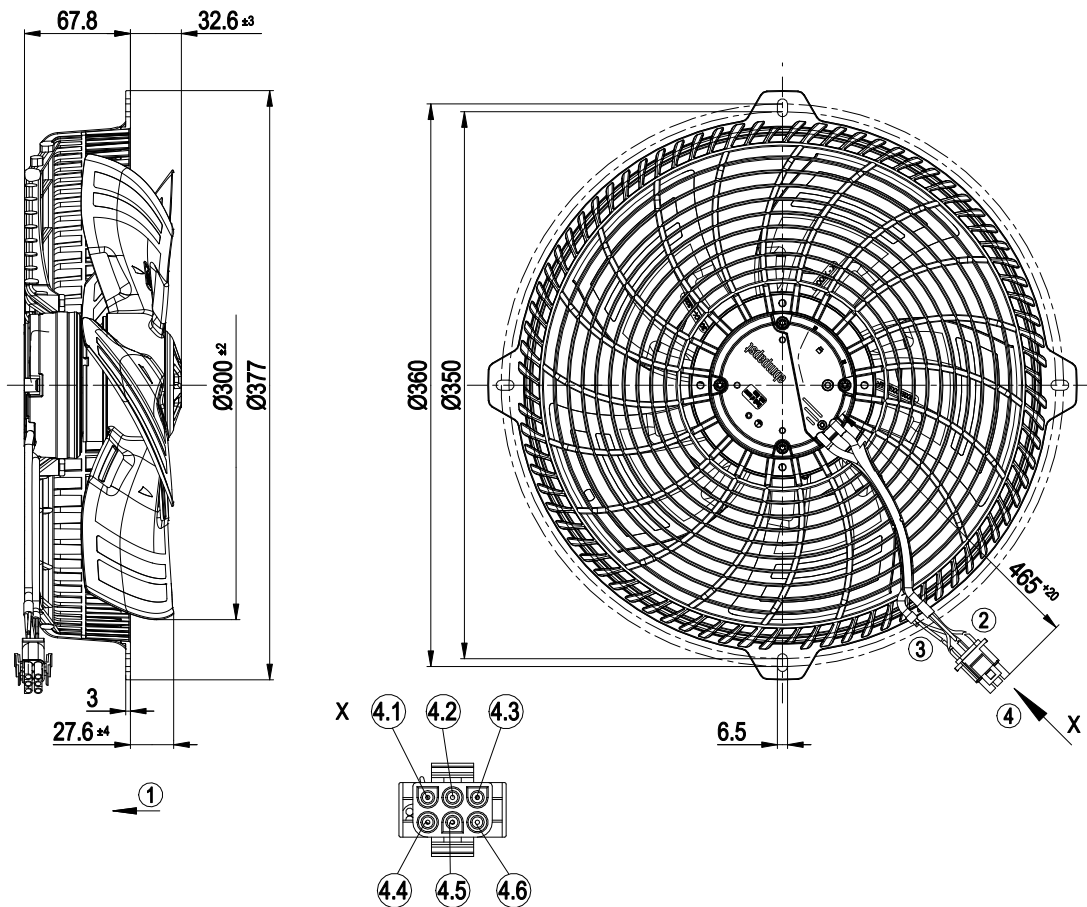


1	Airflow direction "V"
2	Cable PVC AWG20
	3x plug pin TE 926885-1
3	Cable PVC AWG22
	2x plug pin TE 926885-1
4	6-pole connector housing TE 1-1644055-3
4.1	L (black)
4.2	N (blue)
4.3	green/yellow (PE)
4.4	white
4.5	yellow
4.6	not used



EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake
ESM guard grille

Connection diagram

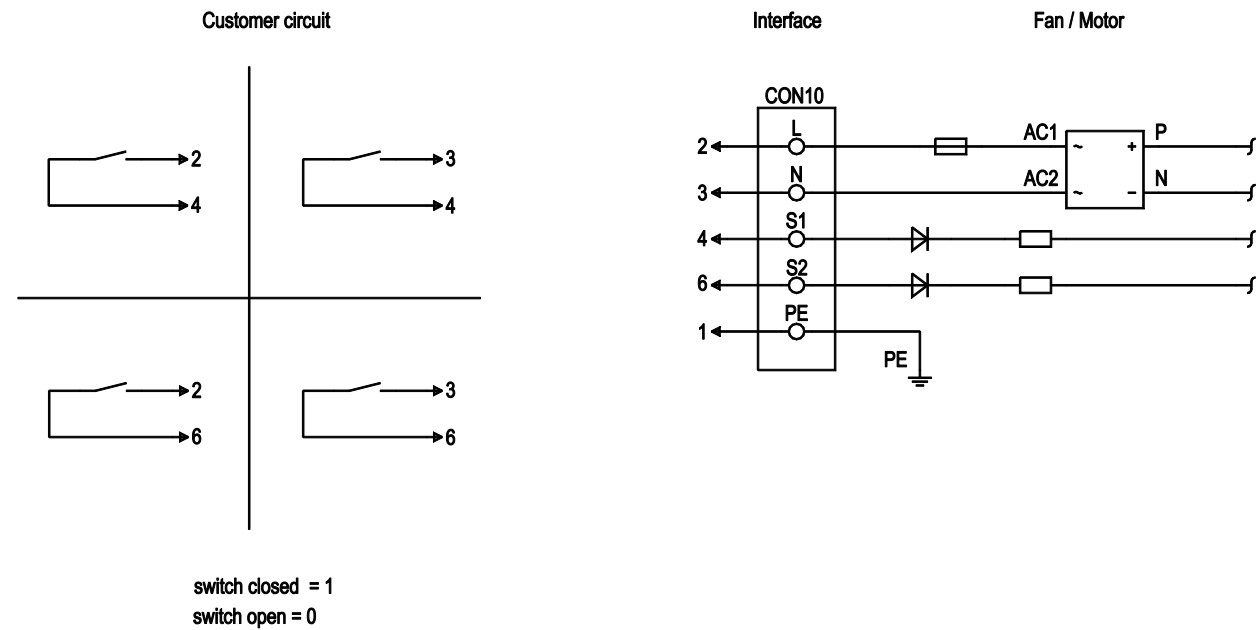

S1	S2	level of rotation speed
0	0	1
1	0	2
0	1	3
1	1	4

No.	Conn.	Designation	Color	Function/assignment
2	L		black	Power supply, phase, see nameplate for voltage range
3	N		blue	Power supply, neutral conductor, see nameplate for voltage range
1	PE		green/yellow	Protective earth
4	S1		yellow	Speed selection: see table
6	S2		white	Speed selection: see table




EC axial fan - HyBlade

sickle-shaped blades (S series), single-intake

ESM guard grille

Curves: Air performance 50 Hz

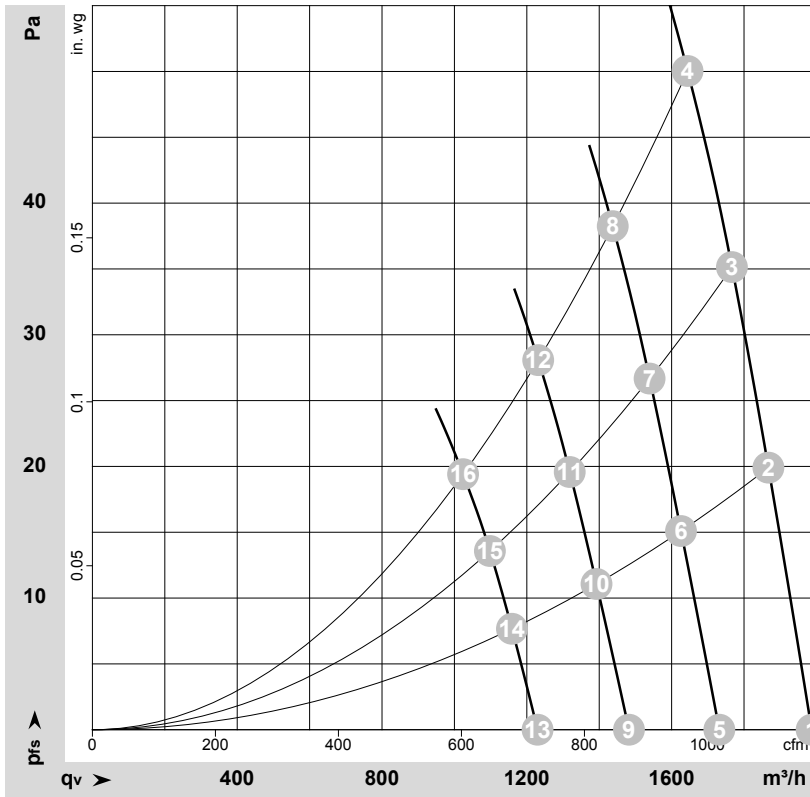

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-187324-1
 Measurement: LU-187494-1
 Measurement: LU-187503-1
 Measurement: LU-187504-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Stage	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
			V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1	1~	230	50	1600	69	0.59	60	68	1985	0	1170	0.00
2	1	1~	230	50	1600	75	0.64	59	68	1865	20	1100	0.08
3	1	1~	230	50	1600	79	0.67	59	68	1765	35	1040	0.14
4	1	1~	230	50	1600	85	0.70	59	68	1645	50	970	0.20
5	2	1~	230	50	1400	48	0.44	56	64	1730	0	1020	0.00
6	2	1~	230	50	1400	52	0.47	56	63	1625	15	955	0.06
7	2	1~	230	50	1400	54	0.49	55	63	1540	27	905	0.11
8	2	1~	230	50	1400	57	0.52	55	63	1435	39	845	0.16
9	3	1~	230	50	1200	31	0.29	52	60	1480	0	870	0.00
10	3	1~	230	50	1200	34	0.31	52	60	1395	11	820	0.04
11	3	1~	230	50	1200	35	0.33	51	60	1320	20	775	0.08
12	3	1~	230	50	1200	37	0.34	51	60	1230	28	725	0.11
13	4	1~	230	50	1000	19	0.18	48	55	1230	0	725	0.00
14	4	1~	230	50	1000	20	0.19	47	55	1160	8	680	0.03
15	4	1~	230	50	1000	21	0.20	47	55	1100	14	645	0.06
16	4	1~	230	50	1000	22	0.21	46	55	1025	20	605	0.08

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 q_v = Air flow · p_{fs} = Pressure increase

