

EC axial fan

sickle-shaped blades (S series), single-intake
with guard grille for short nozzle

S3G300-AL11-61 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	S3G300-AL11-61	
Motor	M3G055-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed	min ⁻¹	1560
Power consumption	W	97
Current draw	A	0.8
Max. back pressure	Pa	98
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC axial fan

sickle-shaped blades (S series), single-intake
with guard grille for short nozzle

Technical description


Weight	2.8 kg
Fan size	300 mm
Rotor surface	Thick-film passivated
Terminal box material	ABS plastic
Blade material	Press-fitted sheet steel blank, sprayed with PP plastic
Guard grille material	Stainless steel
Number of blades	5
Airflow direction	"A"
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor storage	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Thermal overload protection for motor
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Via terminal box
Motor protection	Locked-rotor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE



EC axial fan

sickle-shaped blades (S series), single-intake
with guard grille for short nozzle

Product drawing

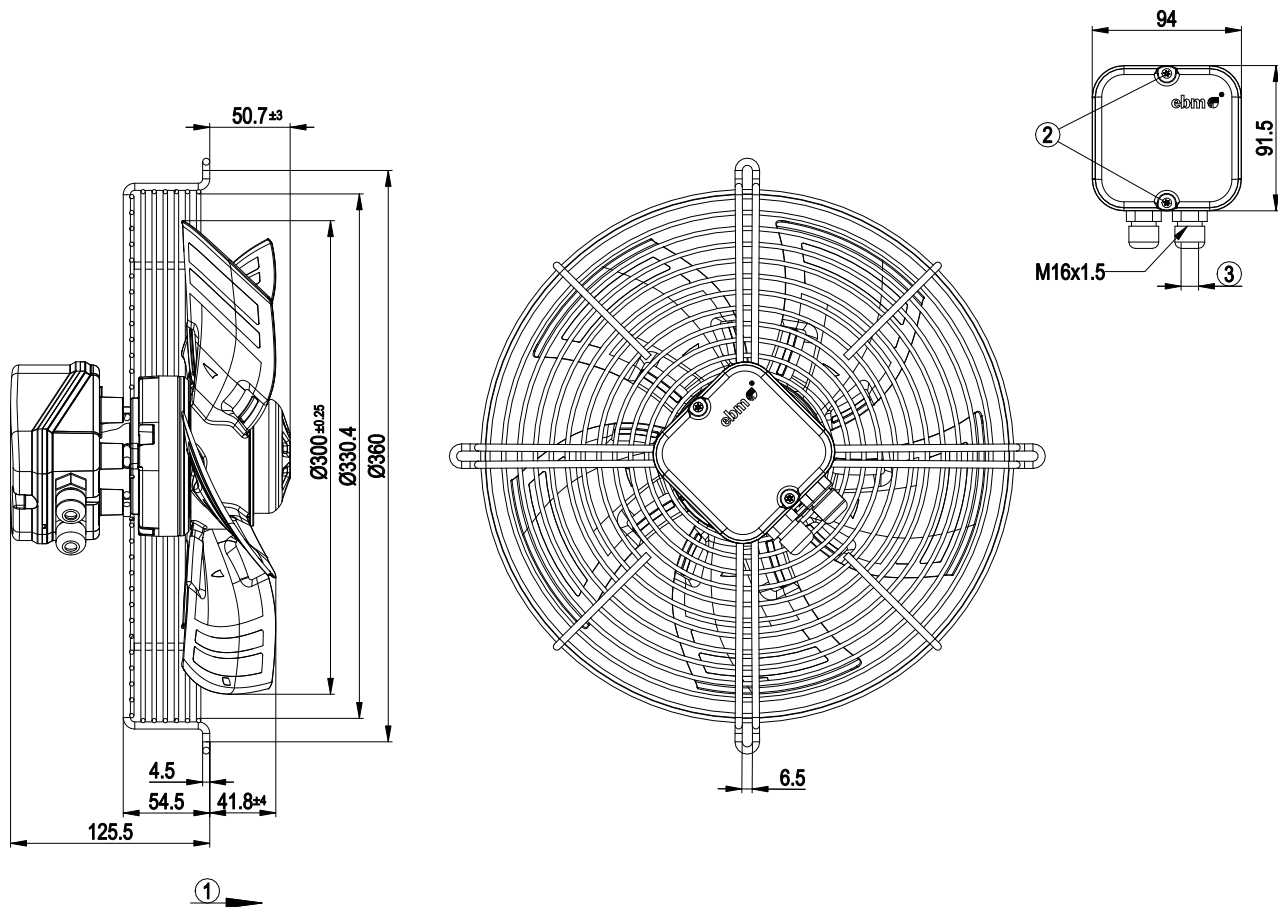


1	Direction of air flow "A"
2	Tightening torque 0.5 ± 0.1 Nm
3	Cable diameter max. 7.5 mm, tightening torque 1.3 ± 0.2 Nm



EC axial fan

sickle-shaped blades (S series), single-intake
with guard grille for short nozzle

Connection diagram

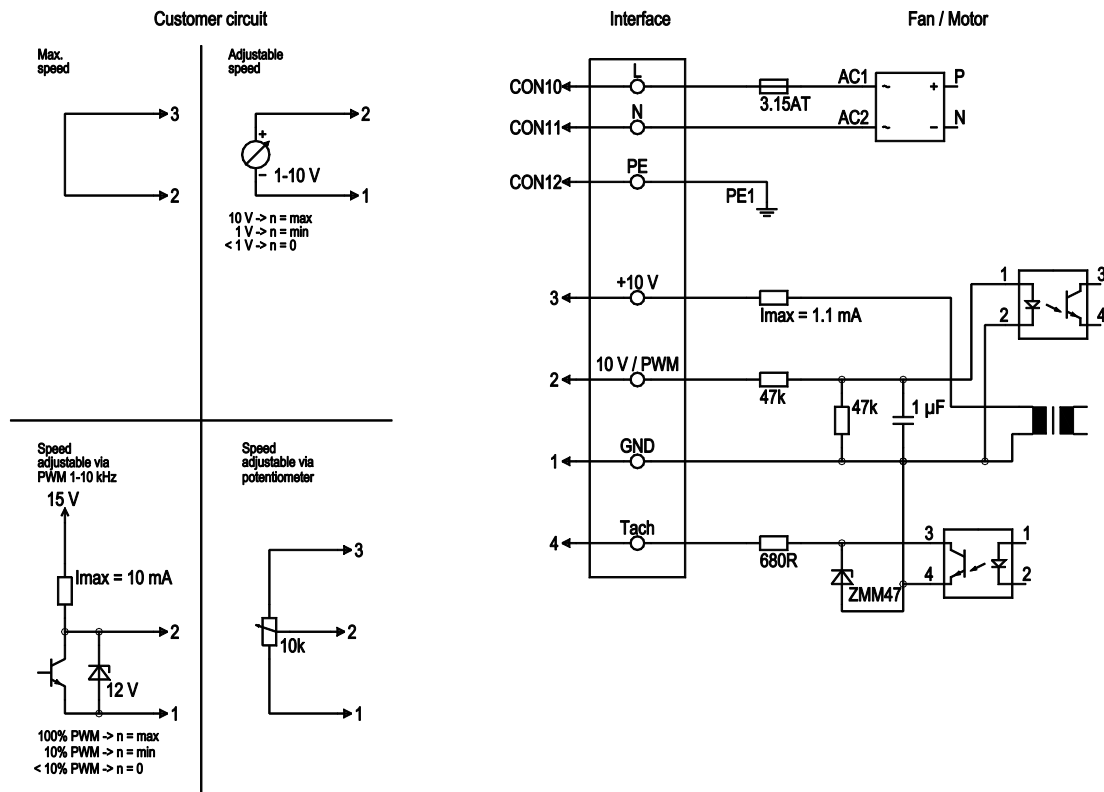


No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
	CON11	N	blue	Neutral conductor
	CON12	PE	green/yellow	Protective earth
	1	GND	blue	GND connection for control interface
	2	0- 10V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
	3	10V/ max 1.1mA	red	Voltage output 10 V / 1.1 mA, electrically isolated, not short-circuit-proof.
	4	Tach	white	Tach output: open collector, 1 pulse per revolution, electrically isolated



EC axial fan

sickle-shaped blades (S series), single-intake
with guard grille for short nozzle

Curves: Air performance 50 Hz

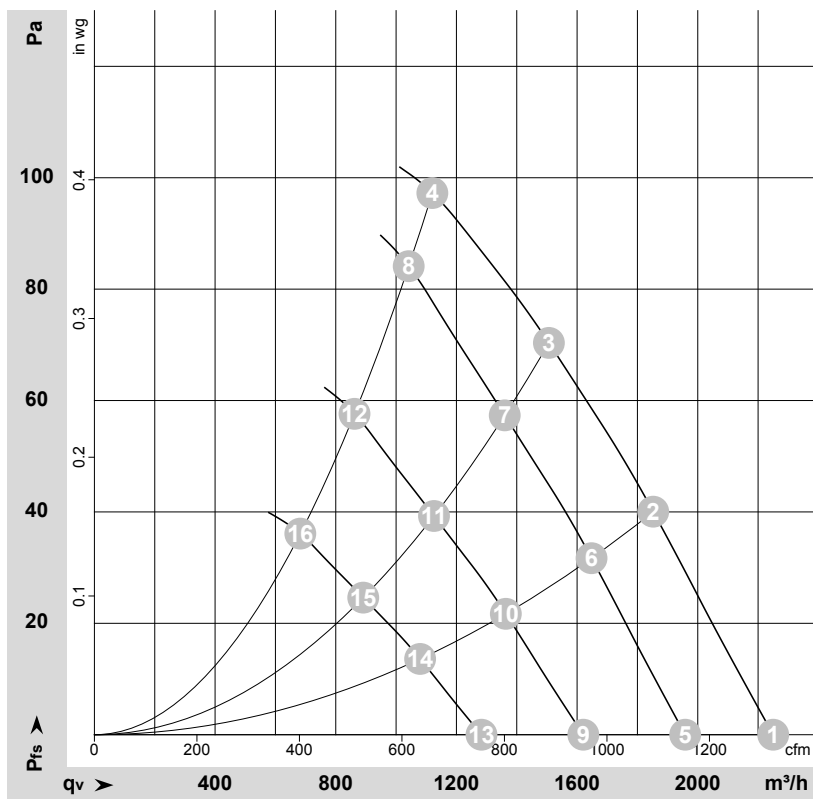

$$\rho = 1,15 \text{ kg/m}^3 \pm 2\%$$

Measurement: LU-166935

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa
1	230	50	1665	73	0.64	58	65	2250	0
2	230	50	1630	82	0.71	58	65	1850	40
3	230	50	1605	87	0.75	58	65	1505	70
4	230	50	1560	97	0.80	60	68	1120	98
5	230	50	1450	48	0.42	55	61	1960	0
6	230	50	1450	58	0.50	55	62	1650	32
7	230	50	1450	64	0.55	56	63	1360	57
8	230	50	1450	78	0.66	59	66	1040	85
9	230	50	1200	27	0.24	50	57	1620	0
10	230	50	1200	33	0.28	50	57	1365	22
11	230	50	1200	36	0.31	51	58	1125	39
12	230	50	1200	44	0.38	54	61	860	58
13	230	50	950	14	0.12	44	51	1285	0
14	230	50	950	16	0.14	44	51	1080	14
15	230	50	950	18	0.15	45	52	890	25
16	230	50	950	22	0.19	48	55	685	36

U = Power supply · f = Frequency · n = Speed · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
qv = Air flow · p_{fs} = Pressure increase

