

EC axial fan - HyBlade

sickled blades (S series)
with guard grille for full nozzle

S3G400-CK56-12 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	S3G400-CK56-12	
Motor	M3G074-CF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Type of data definition		me
Speed (rpm)	min ⁻¹	1100
Power input	W	135
Current draw	A	1.1
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	36.6	28.1
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		48.5	40
05 Variable speed drive		Yes	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_{ed}	kW	0.13
09 Air flow q_v	m³/h	2405
09 Pressure increase p_{fs}	Pa	67
10 Speed (rpm) n	min ⁻¹	1085
11 Specific ratio*		1.00

* Specific ratio = $1 + p_g / 100\,000\text{ Pa}$

LU-124733



EC axial fan - HyBlade

sickled blades (S series)

with guard grille for full nozzle

Technical features


Mass	4.4 kg
Size	400 mm
Surface of rotor	Coated in black
Material of impeller	PP plastic
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Direction of air flow	"V"
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Insulation class	"B"
Humidity (F)/environmental protection class (H)	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected motor
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1
Approval	CSA C22.2 No.77; UL 2111



EC axial fan - HyBlade

sickled blades (S series)
with guard grille for full nozzle

Product drawing

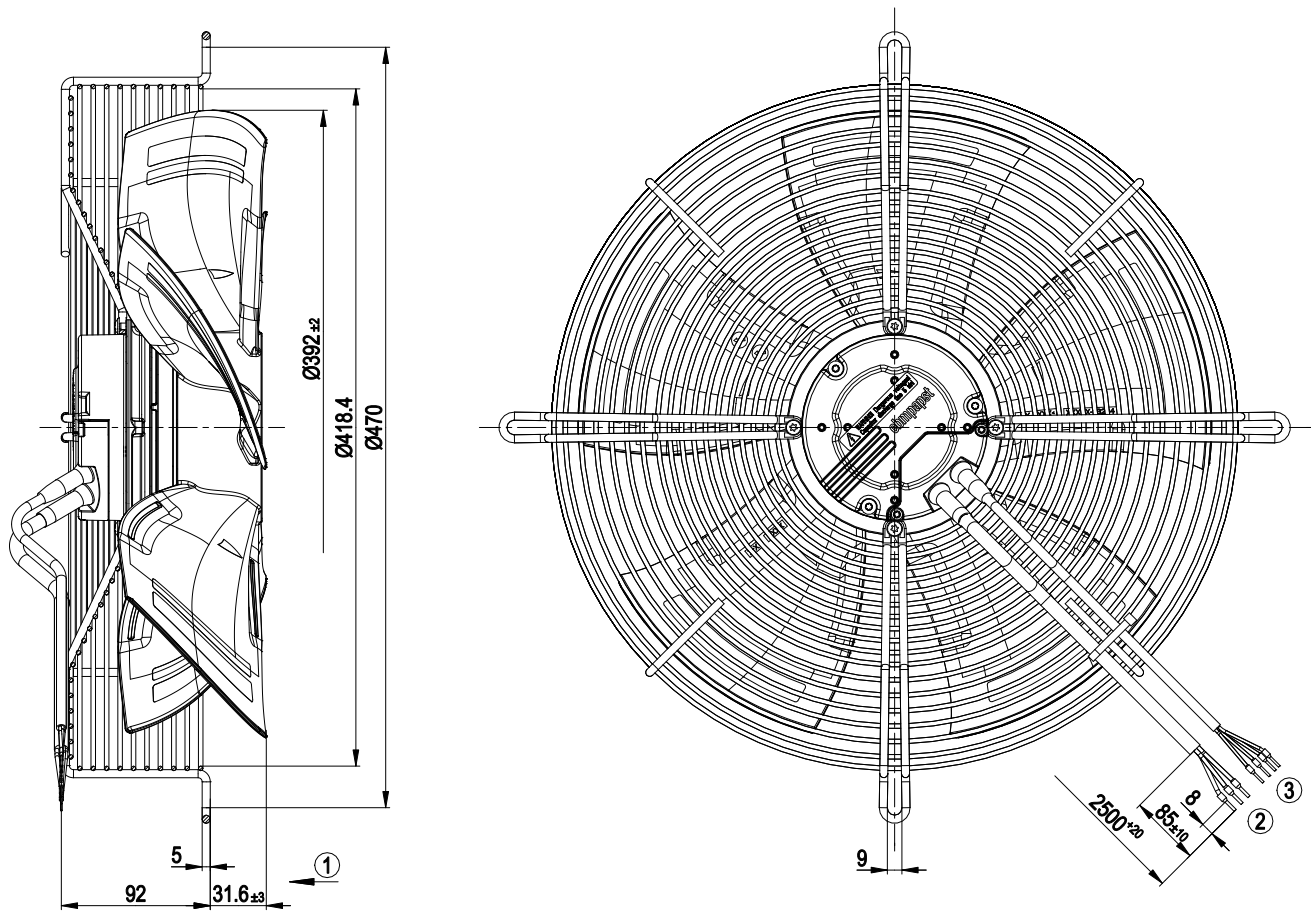

- | | |
|---|--|
| 1 | Direction of air flow "V" |
| 2 | Connection line AWG 18, 3 x crimped core-end sleeves |
| 3 | Connection line AWG 22, 4 x crimped core-end sleeves |




EC axial fan - HyBlade

sickled blades (S series)


with guard grille for full nozzle

Connection screen

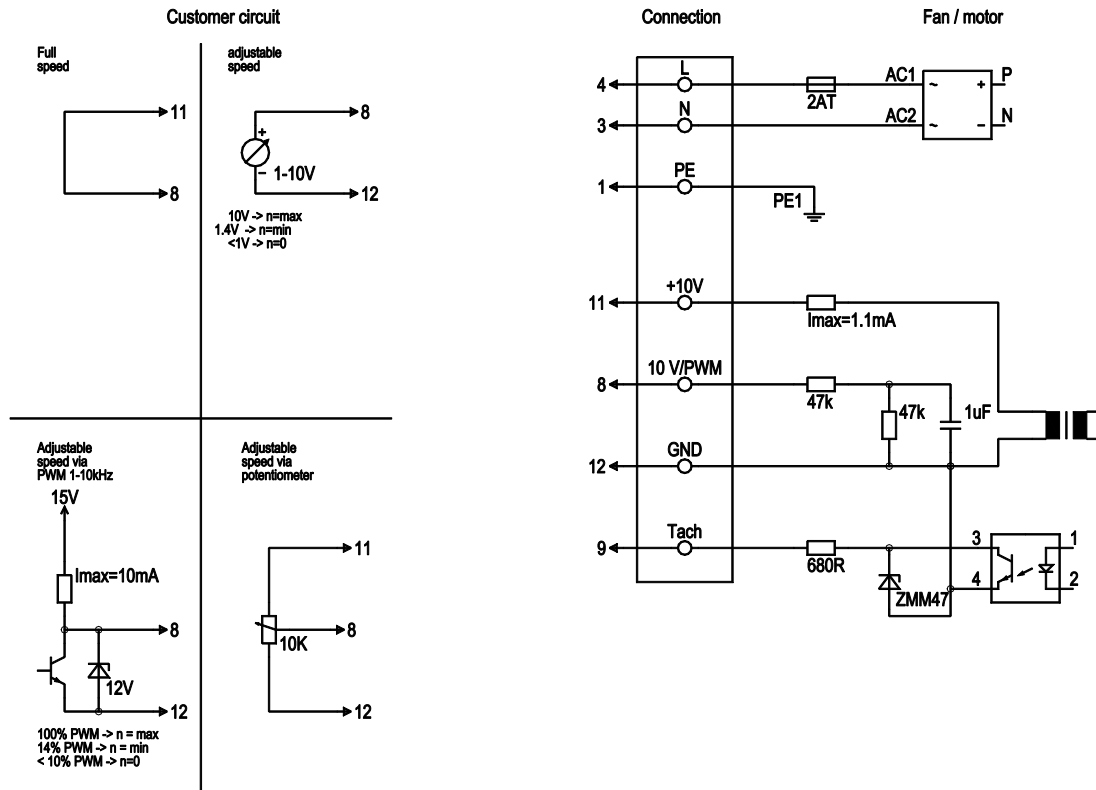

No.	Conn.	Designation	Colour	Function / assignment
	4	L	black	Power supply 230 VAC, 50-60 Hz, see type plate for voltage range
	3	N	blue	Neutral conductor
	1	PE	green/yellow	Protective earth
	8	0-10 V PWM	yellow	Control input 0 - 10 V or PWM, electrically isolated
	9	Tach	white	Tach output: open collector, 1 pulse per revolution, electrically isolated
	11	10V / max 1.1 mA	red	Voltage output 10 V / max. 1.1 mA, electrically isolated
	12	GND	blue	GND - Connection for control interface

Charts: Air flow 50 Hz

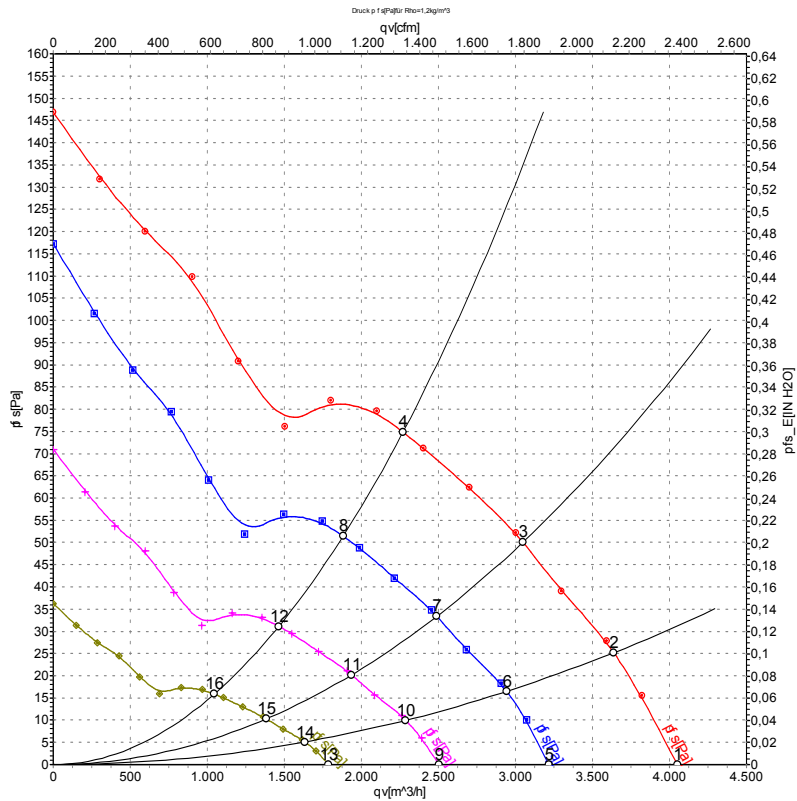

Measurement: LU-124733-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _{ed}	I	L _{pA_{in}}	L _{wA_{in}}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	inH ₂ O
1	230	50	1135	120	0.85	62	69	4050	0	2385	0.00
2	230	50	1115	129	0.91	60	66	3635	25	2140	0.10
3	230	50	1100	134	0.95	57	64	3050	50	1795	0.20
4	230	50	1100	135	1.10	58	66	2270	75	1335	0.30
5	230	50	900	60	0.43	57	64	3220	0	1895	0.00
6	230	50	900	68	0.48	55	62	2940	17	1730	0.07
7	230	50	900	73	0.52	52	59	2490	34	1465	0.14
8	230	50	900	80	0.56	54	62	1880	51	1110	0.20
9	230	50	700	28	0.20	51	58	2505	0	1475	0.00
10	230	50	700	32	0.23	50	56	2290	10	1345	0.04
11	230	50	700	34	0.24	47	54	1935	20	1140	0.08
12	230	50	700	37	0.27	49	56	1465	31	860	0.12
13	230	50	500	10	0.07	44	51	1790	0	1050	0.00
14	230	50	500	12	0.08	42	49	1635	5	960	0.02
15	230	50	500	13	0.09	39	46	1385	10	815	0.04
16	230	50	500	14	0.10	41	49	1045	16	615	0.06

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · L_{pA_{in}} = Sound pressure level inlet side · L_{wA_{in}} = Sound power level inlet side · q_v = Air flow
p_{fs} = Pressure increase