

EC axial fan - HyBlade

sickled blades (S series)
with guard grille for short nozzle

S3G400-LA14-A3 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	S3G400-LA14-A3	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	1650
Power input	W	435
Current draw	A	1.9
Max. back pressure	Pa	180
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	42.5	31.2
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		51.3	40
05 Variable speed drive		Yes	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_{ed}	kW	0.4
09 Air flow q_v	m³/h	3505
09 Pressure increase p_{fs}	Pa	161
10 Speed (rpm) n	min ⁻¹	1650
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-119465



Technical features


Mass	7 kg
Size	400 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium
Material of blades	Sheet steel, coated in black
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Direction of air flow	"A"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity (F)/environmental protection class (H)	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Alarm relay - Motor current limit - PFC, active - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 55022 (Class B)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE
Approval	CSA C22.2 No.77; UL 2111

EC axial fan - HyBlade

sickled blades (S series)

with guard grille for short nozzle

Product drawing

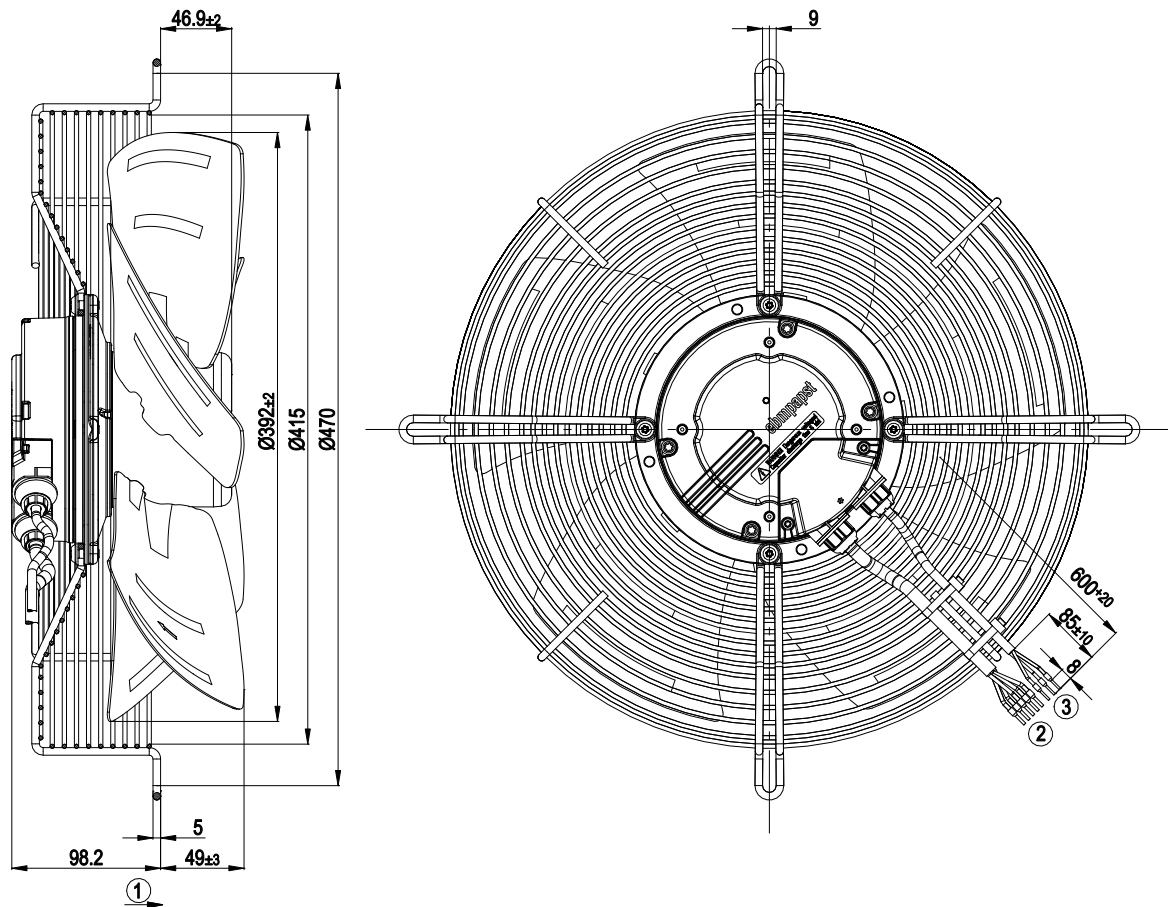

1	Direction of air flow "A"
2	Connection line PVC AWG18, 5x crimped core-end sleeves
3	Connection line PVC AWG22, 3x crimped core-end sleeves

EC axial fan - HyBlade


sickled blades (S series)

with guard grille for short nozzle


Connection screen

Customer circuit


Full speed



Speed setting




Speed setting via potentiometer



Connection


Fan / motor

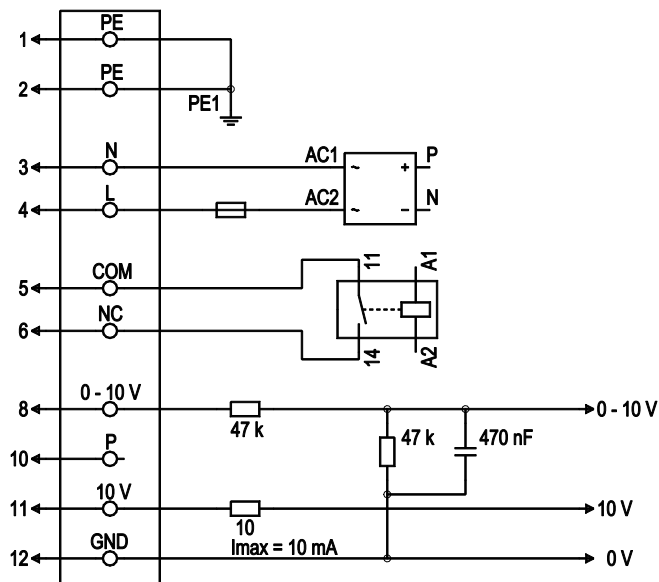

No.	Conn.	Designation	Colour	Function / assignment
1	1, 2	PE	green/yellow	Protective earth
1	3	N	blue	Supply voltage, neutral conductor, voltage range see rating plate, 50 / 60 Hz
1	4	L	black	Supply voltage, phase, voltage range see rating plate, 50 / 60 Hz
1	5	COM	white 1	Floating status message contact, normally closed connection (2 A, max. 250 VAC, min. 10 mA)
1	6	NC	white 2	Floating status message contact, normally closed connection
2	8	0 - 10 V	yellow	Control input, set value 0 - 10 VDC, impedance 100 kOhm, SELV
2	10	P	orange	Not assigned
2	11	10 VDC	red	Voltage output 10 VDC (+/-3%), max. 10 mA, supply voltage for ext. devices (e.g. potentiometer), SELV
2	12	GND	blue	Reference mass for control interface, SELV



Charts: Air flow 50 Hz

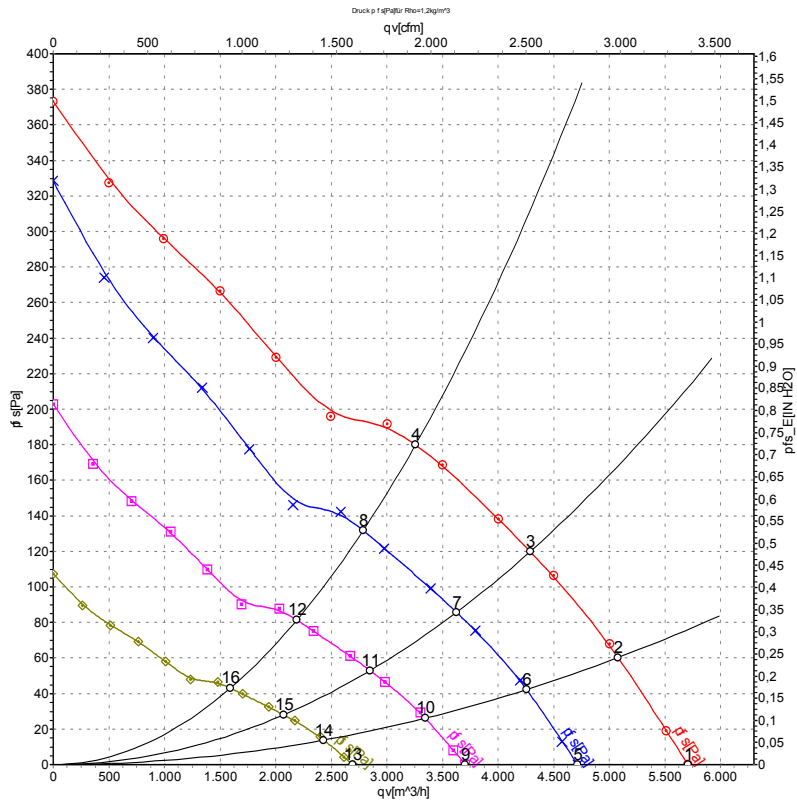

Measurement: LU-119465-1

Air performance measured as per ISO 5801
 Installation category A. For detailed
 information on the measuring set-up, please
 contact ebm-papst. Suction-side noise
 levels: L_{WA} measured as per ISO 13347 /
 L_{pA} measured with 1m distance to fan axis.
 The values given are valid under the
 measuring conditions mentioned above and
 may vary according to the actual installation
 situation. With any deviation from the
 standard set-up, the specific values have to
 be checked and reviewed with the unit
 installed.

Measured values

	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH2O
1	230	50	1695	355	1.56	5705	0	3360	0.00
2	230	50	1670	383	1.68	5080	60	2990	0.24
3	230	50	1655	400	1.76	4290	120	2525	0.48
4	230	50	1650	435	1.90	3255	180	1915	0.72
5	230	50	1400	200	0.88	4715	0	2775	0.00
6	230	50	1400	225	0.99	4255	43	2505	0.17
7	230	50	1400	242	1.06	3625	86	2135	0.35
8	230	50	1400	264	1.16	2785	132	1640	0.53
9	230	50	1100	97	0.43	3705	0	2180	0.00
10	230	50	1100	109	0.48	3345	26	1970	0.10
11	230	50	1100	117	0.52	2850	53	1675	0.21
12	230	50	1100	128	0.56	2190	81	1290	0.33
13	230	50	800	37	0.16	2695	0	1585	0.00
14	230	50	800	42	0.19	2430	14	1430	0.06
15	230	50	800	45	0.20	2070	28	1220	0.11
16	230	50	800	49	0.22	1595	43	940	0.17

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

