

EC axial fan - HyBlade®

sickled blades (S series), single inlet
with guard grille for short nozzle

S3G630-AH02-07 ebmpapst Datasheet
sales@fansco.com
www.fansco.com



Nominal data

Type	S3G630-AH02-07	
Motor	M3G150-IF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Type of data definition		ml
Speed	min ⁻¹	1490
Power input	W	3100
Current draw	A	4.8
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.00

* Specific ratio = 1 + p_{fs} / 100 000 Pa

	Actual	Request 2013	Request 2015
Overall efficiency η_{es}	39	32.8	36.8
Efficiency grade N	42.2	36	40
Power input P _{ed}	kW	3.16	
Air flow q _v	m ³ /h	13205	
Pressure increase p _{fs}	Pa	320	
Speed n	min ⁻¹	1500	

Data established at point of optimum efficiency



EC axial fan - HyBlade®

sickled blades (S series), single inlet
with guard grille for short nozzle

Technical features


Mass	29.5 kg
Size	630 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium, coated in black
Material of blades	Die-cast aluminium
Material of guard grille	Steel, phosphated and coated in black plastic
Number of blades	5
Blade angle	0°
Direction of air flow	"V"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- PFC, passive - Control input 0-10 VDC / PWM - Over-temperature protected electronics / motor - Alarm relay - Integrated PID controller - Input for sensor 0-10 V or 4-20 mA - Output for slave 0-10 V - RS485 ebmBUS - Motor current limit - Soft start - Line undervoltage / phase failure detection - Output 10 VDC, max. 10 mA - Output 20 VDC, max. 50 mA
EMC interference immunity	Acc. to EN 61000-6-2
EMC interference emission	Acc. to EN 61000-6-3
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Reverse polarity and locked-rotor protection
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	CE
Approval	GOST



EC axial fan - HyBlade®

sickled blades (S series), single inlet
with guard grille for short nozzle

Product drawing

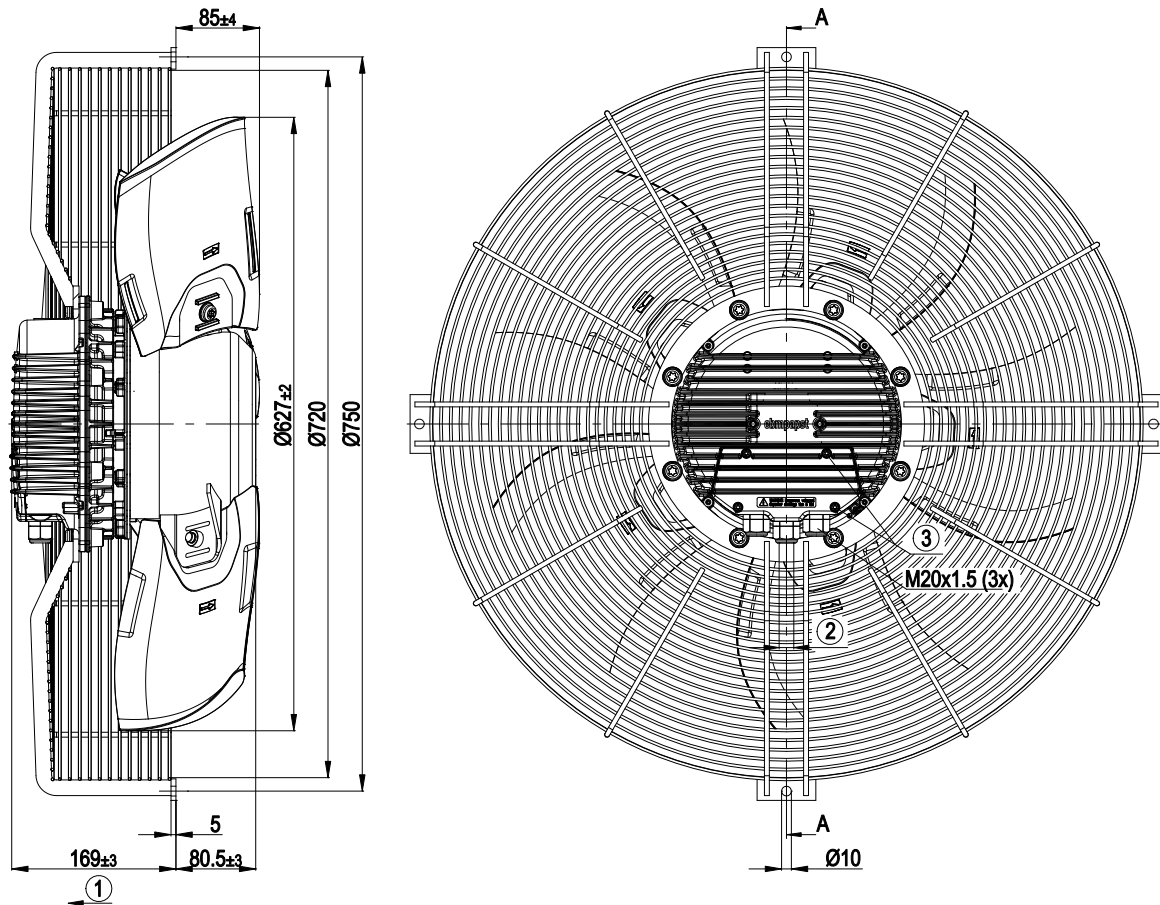


- | | |
|---|--|
| 1 | Direction of air flow "V" |
| 2 | Cable diameter: min. 4 mm; max. 10 mm; tightening torque: 4 ± 0.6 Nm |
| 3 | Tightening torque 3.5 ± 0.5 Nm |

EC axial fan - HyBlade®


sickled blades (S series), single inlet
with guard grille for short nozzle

Connection screen

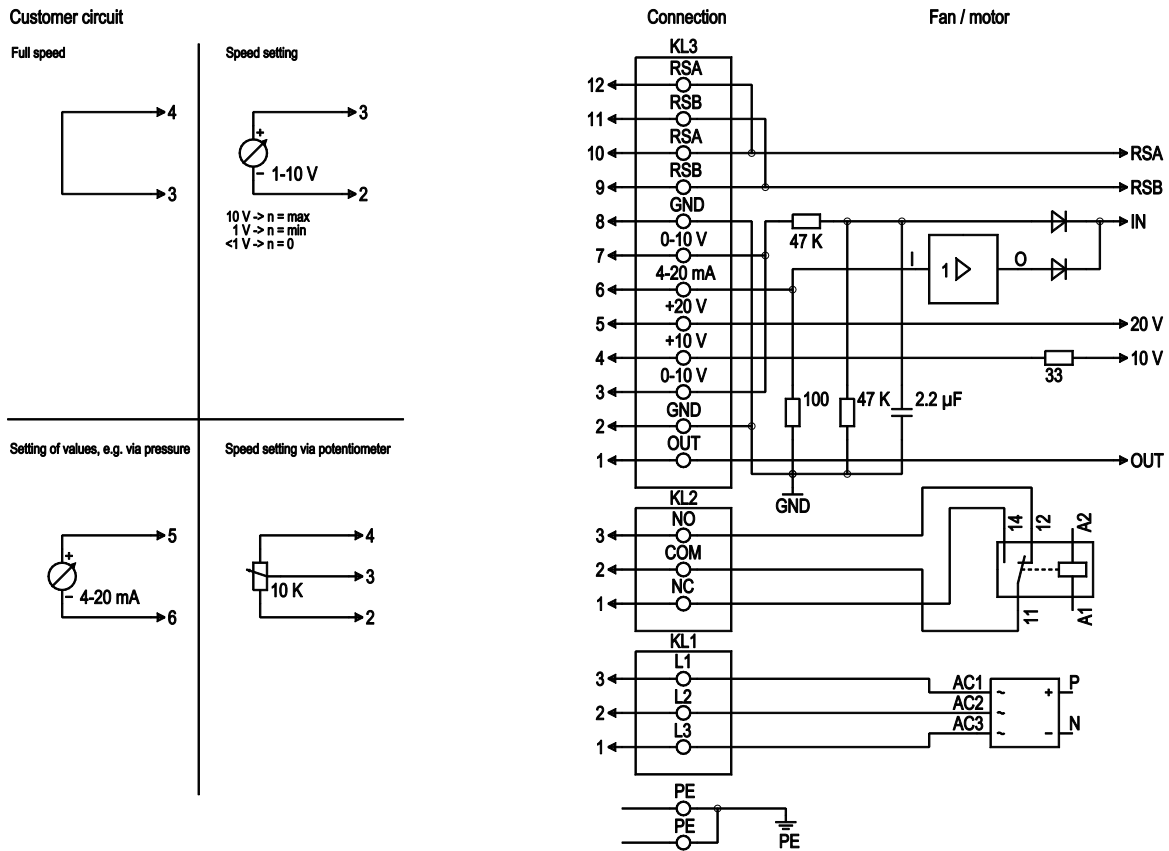

No.	Pin	Signal	Function / assignment
PE		PE	Protective earth connection
KL1	1, 2, 3	L1, L2, L3	Supply voltage, 50/60 Hz
KL2	1	NC	Floating status message contact, normally closed connection
KL2	2	COM	Floating status message contact, changeover contact, common connection (2 A, max. 250 VAC, min. 10 mA, AC1)
KL2	3	NO	Floating status message contact, normally open connection
KL3	1	OUT	Analog output, 0-10 VDC, max. 3 mA, SELV, output of the current level control coefficient: 1 V equates to 10 % level control coefficient. 10 V equate to 100 % level control coefficient.
KL3	2, 8	GND	Reference mass for control interface, SELV
KL3	3, 7	0-10 V	Use control / actual value input 0-10 VDC, impedance 100 kΩ only as alternative to 4-20 mA input, SELV
KL3	4	+10 V	Voltage output 10 VDC (+/-3 %), max. 10 mA, supply voltage for ext. devices (e.g. potentiometers), SELV
KL3	5	+20 V	Voltage output 20 VDC (+25 %/-10 %), max. 50 mA, supply voltage for ext. devices (e.g. sensors), SELV
KL3	6	4-20 mA	Use control / actual value input 4-20 mA, impedance 100 Ω, only as alternative to 0-10 V input, SELV
KL3	9, 11	RSB	RS485 interface for ebmBus, RSB, SELV
KL3	10, 12	RSA	RS485 interface for ebmBus, RSA, SELV

Charts: Air flow 50 Hz

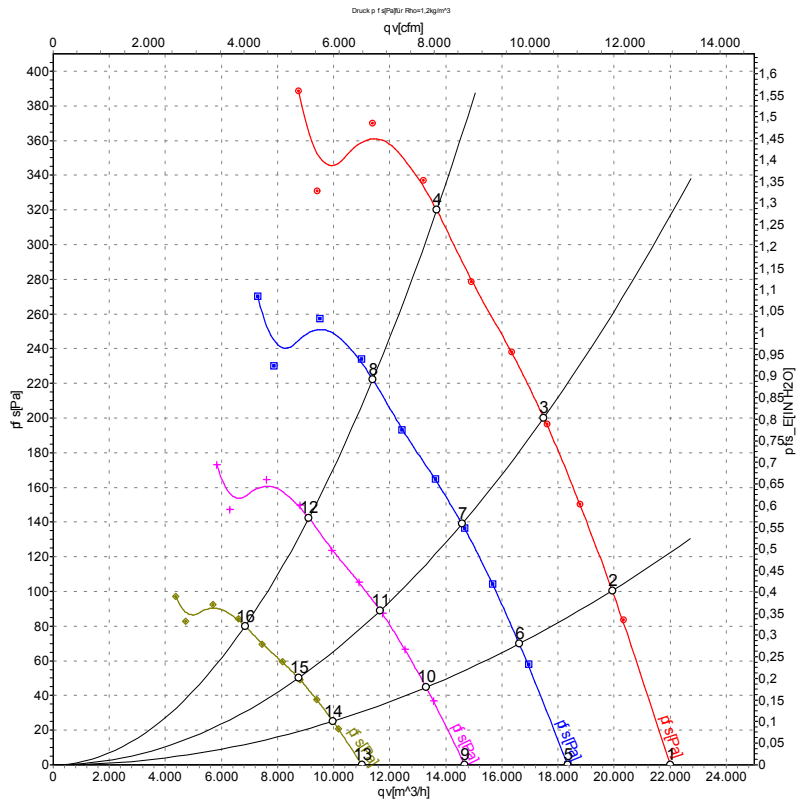

Measurement: LU-113489

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa
1	400	50	1500	2432	3.66	74	82	83	22000	0
2	400	50	1490	2660	4.02	73	80	81	19940	100
3	400	50	1490	2871	4.36	74	80	81	17490	200
4	400	50	1490	3100	4.80	78	85	85	13670	320
5	400	50	1250	1410	2.12	70	78	79	18350	0
6	400	50	1250	1540	2.32	69	77	77	16620	70
7	400	50	1250	1661	2.52	70	76	77	14570	139
8	400	50	1250	1819	2.75	74	81	81	11400	223
9	400	50	1000	722	1.09	66	73	74	14680	0
10	400	50	1000	789	1.19	64	72	72	13290	45
11	400	50	1000	850	1.29	65	72	72	11660	89
12	400	50	1000	931	1.41	70	76	76	9115	142
13	400	50	750	305	0.46	59	67	68	11010	0
14	400	50	750	333	0.50	58	65	66	9970	25
15	400	50	750	359	0.55	59	65	66	8745	50
16	400	50	750	393	0.60	63	70	70	6835	80

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · LwA_{out} = Sound power level outlet side

q_v = Air flow · p_{fs} = Pressure increase