

## S3G910-CY21-68

Güntner GmbH & Co. KG

VT03147U.2

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

S3G910-CY21-68 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

### Nominal data

Type	S3G910-CY21-68	
Motor	M3G150-IF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	1050
Power consumption	W	2650
Current draw	A	4.1
Max. back pressure	Pa	200
Max. back pressure	in. wg	0.8
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

### Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	47.6	36.3	09 Power consumption $P_{ed}$	kW	2.64
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	21795
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	197
04 Efficiency grade N		51.3	40	10 Speed (rpm) n	min <sup>-1</sup>	1050
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-206328

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).  
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.  
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



S3G910-CY21-68

Güntner GmbH & Co. KG

VT03147U.2

## EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

### Technical description

Weight	32.8 kg
Size	910 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum, painted gray
Blade material	Sheet aluminum insert, sprayed with PP plastic
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Blade pitch	-5°
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"><li>- Operation and alarm display with LED</li><li>- External 15-50 VDC input (parameterization)</li><li>- Alarm relay</li><li>- Integrated PI controller</li><li>- Configurable inputs/outputs (I/O)</li><li>- MODBUS V6.3</li><li>- Motor current limitation</li><li>- RS-485 MODBUS-RTU</li><li>- Soft start</li><li>- Voltage output 3.3-24 VDC, Pmax = 800 mW</li><li>- Control interface with SELV potential safely disconnected from the mains</li><li>- Thermal overload protection for electronics/motor</li><li>- Line undervoltage / phase failure detection</li></ul>
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Reverse polarity and locked-rotor protection



S3G910-CY21-68

Güntner GmbH & Co. KG

VT03147U.2

## EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

<b>Protection class assignment</b>	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
<b>Conformity with standards</b>	EN 61800-5-1; UKCA; CE
<b>Approval</b>	UL 1004-7 + 60730-1; EAC; CSA C22.2 No. 77 + CAN/CSA-E60730-1



S3G910-CY21-68

Güntner GmbH & Co. KG


VT03147U.2

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

## Product drawing

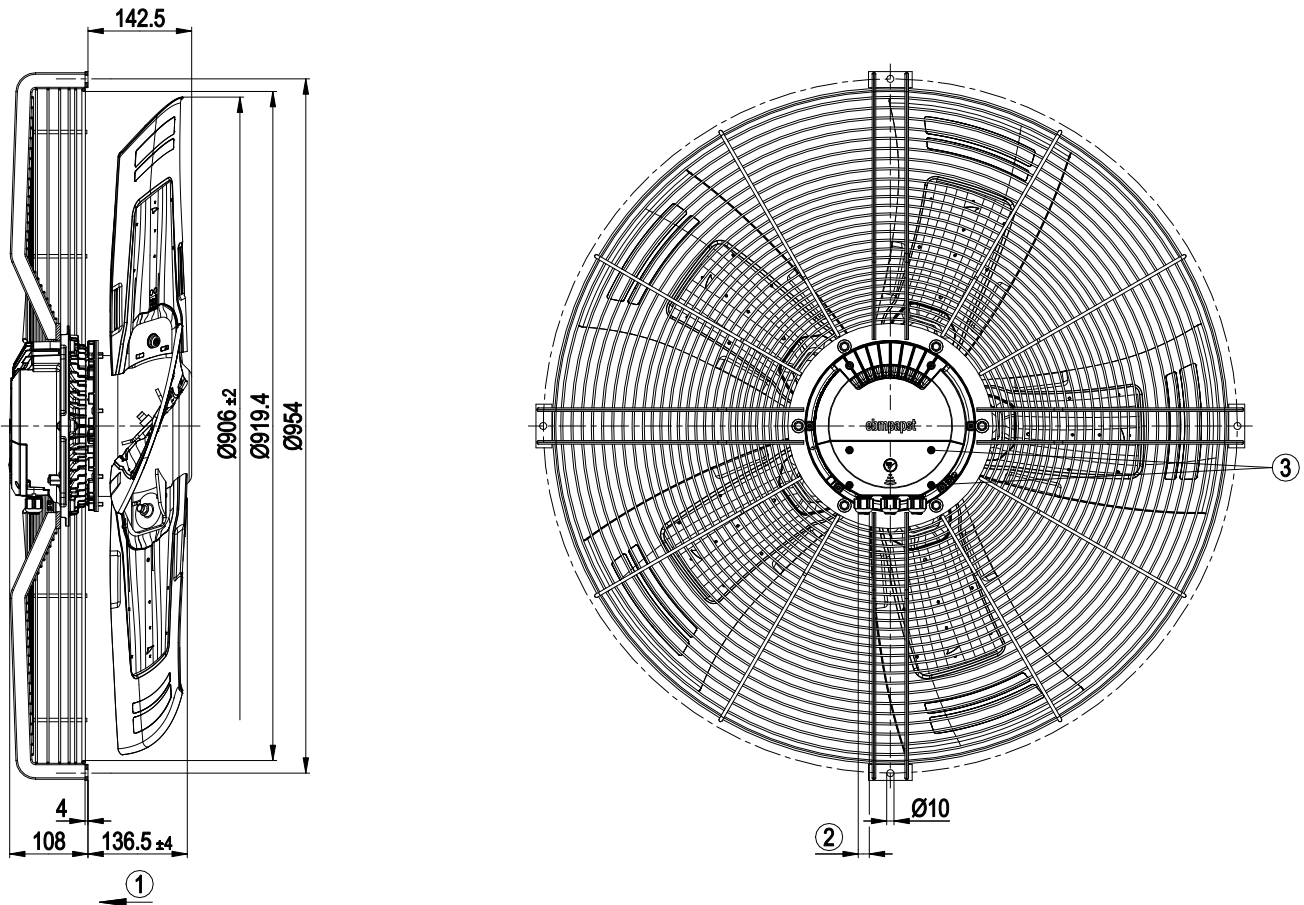


1	Airflow direction "V"
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque $4 \pm 0.6$ Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
3	Tightening torque $1.5 \pm 0.2$ Nm
	Cable for bridge included separately in terminal box



# EC axial fan - HyBlade

sickle-shaped blades (S series)  
with guard grille for full nozzle

## Connection diagram

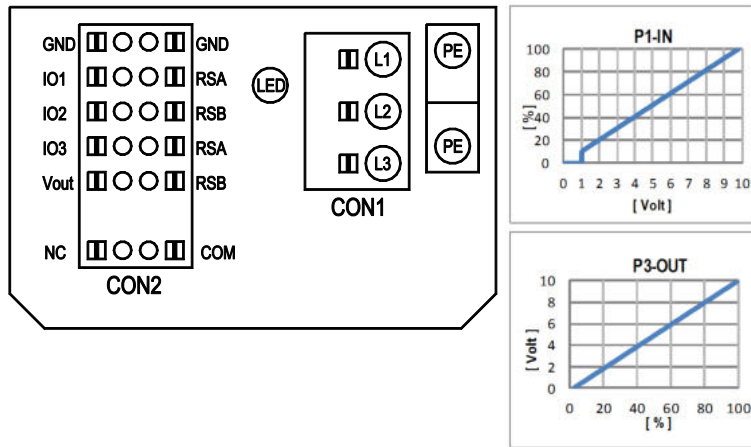

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, function: Set value characteristic curve parameterizable (see input characteristic curve P1-IN), SELV, bridged to Vout (+10 V) corresponds to 100% PWM
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Function: no SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Fan modulation level Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve






# S3G910-CY21-68

Güntner GmbH & Co. KG  
VT03147U.2

# EC axial fan - HyBlade

sickle-shaped blades (S series)  
with guard grille for full nozzle

## Curves: Air performance 50 Hz

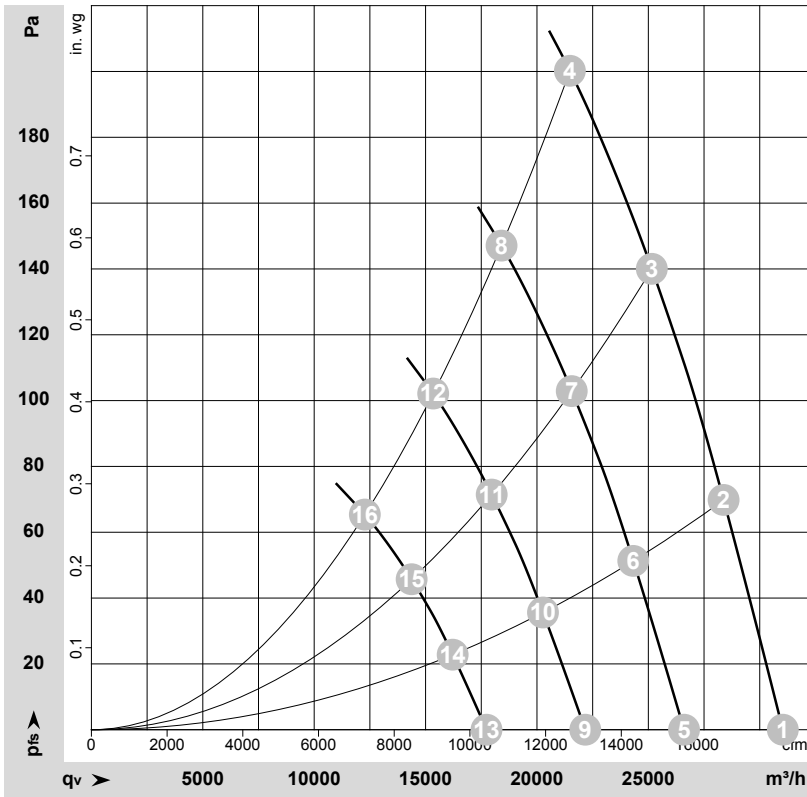

$\rho = 1.187 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-206328-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	3~	400	50	1050	1715	2.72	74	82	83	31035	0	18270	0.00
2	3~	400	50	1050	2045	3.20	73	80	81	28380	70	16705	0.28
3	3~	400	50	1050	2378	3.69	74	81	83	25155	140	14805	0.56
4	3~	400	50	1050	2650	4.10	79	86	88	21480	200	12640	0.80
5	3~	400	50	900	1080	1.71	71	78	79	26605	0	15660	0.00
6	3~	400	50	900	1288	2.01	69	76	77	24325	53	14315	0.21
7	3~	400	50	900	1498	2.32	70	77	79	21560	103	12690	0.41
8	3~	400	50	900	1681	2.60	75	82	84	18410	147	10835	0.59
9	3~	400	50	750	625	0.99	66	73	74	22170	0	13050	0.00
10	3~	400	50	750	745	1.17	64	71	73	20270	37	11930	0.15
11	3~	400	50	750	867	1.34	66	73	74	17970	72	10575	0.29
12	3~	400	50	750	973	1.50	71	78	79	15340	102	9030	0.41
13	3~	400	50	600	320	0.51	60	68	69	17735	0	10440	0.00
14	3~	400	50	600	382	0.60	58	66	67	16215	24	9545	0.10
15	3~	400	50	600	444	0.69	60	67	69	14375	46	8460	0.18
16	3~	400	50	600	498	0.77	65	72	74	12275	65	7225	0.26

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

