

AC axial fan - HyBlade

sickled blades (S series)

with guard grille for full nozzle

S8D500-BJ09-02 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	S8D500-BJ09-02				
Motor	M8D110-EF				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	400	400	480	480
Connection		Δ	Y	Δ	Y
Frequency	Hz	50	50	60	60
Type of data definition		ml	ml	ml	ml
Valid for approval / standard		CE	CE	CE	CE
Speed (rpm)	min ⁻¹	665	525	780	570
Power input	W	130	80	190	120
Current draw	A	0.31	0.15	0.34	0.18
Max. back pressure	Pa	40	24	50	26
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	80	80	80	80
Starting current	A	0.75	0.25	0.83	0.28

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



AC axial fan - HyBlade

sickled blades (S series)

with guard grille for full nozzle

Technical features

Mass	10.3 kg
Size	500 mm
Surface of rotor	Coated in black
Material of terminal box	PP plastic
Material of blades	Press-fitted sheet steel blank, sprayed with PP plastic
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Direction of air flow	"A"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity (F)/environmental protection class (H)	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	≤ 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE
Approval	VDE; EAC




AC axial fan - HyBlade

sickled blades (S series)

with guard grille for full nozzle

Product drawing

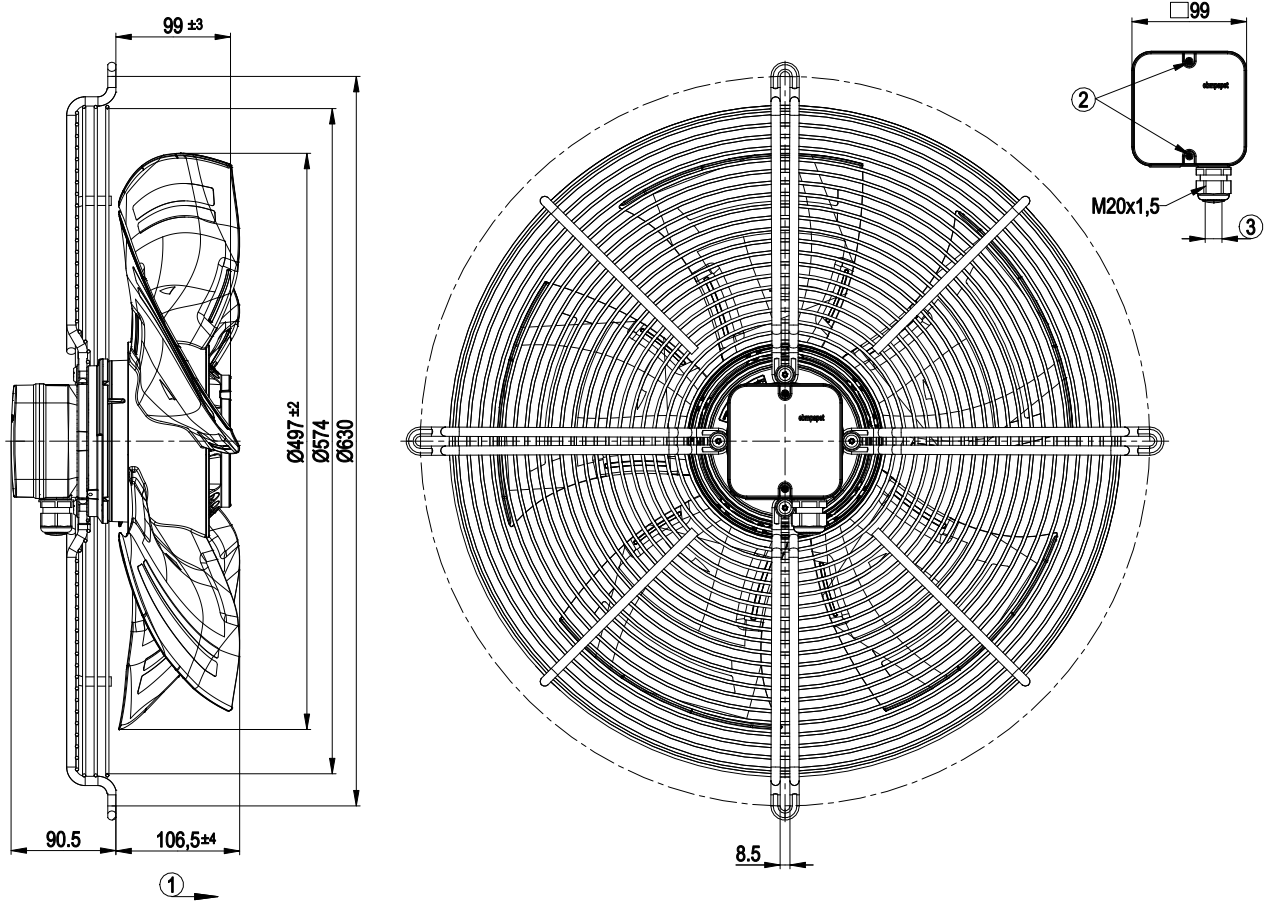


1	Direction of air flow "A"
2	Tightening torque 1.5±0.2 Nm
3	Cable diameter: min. 6 mm, max. 12 mm, tightening torque 2±0.3 Nm

AC axial fan - HyBlade

sickled blades (S series)
with guard grille for full nozzle

Connection screen

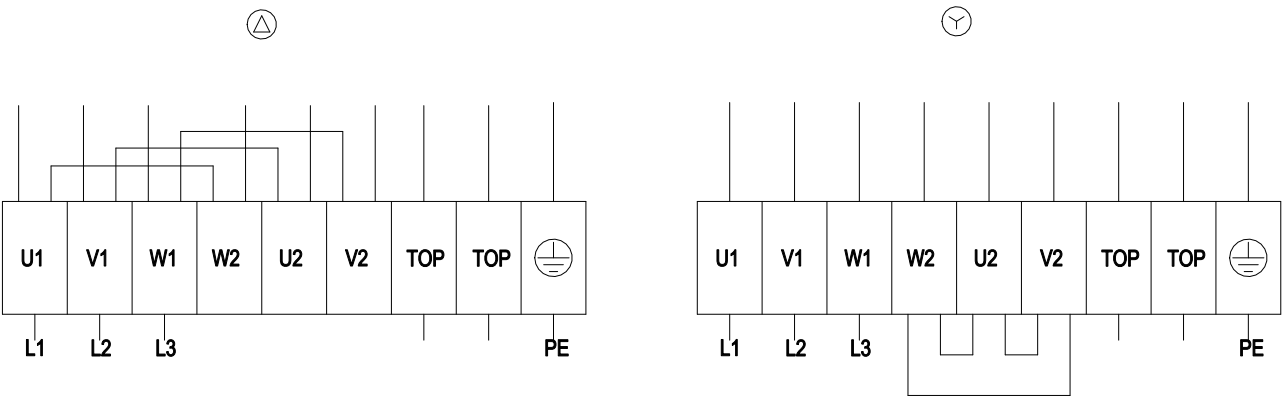

△	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green/yellow				




AC axial fan - HyBlade

sickled blades (S series)

with guard grille for full nozzle

Charts: Air flow 50 Hz

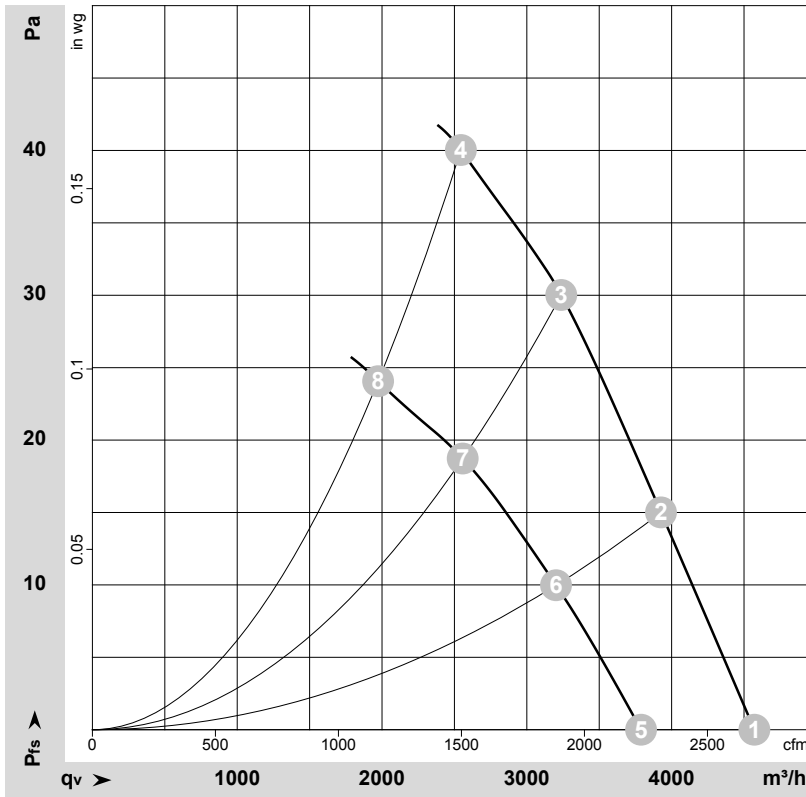

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-152533-1
Measurement: LU-146685-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _V	p _{fs}	q _V	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	Δ	400	50	695	102	0.29	55	62	61	4570	0	2690	0.00
2	Δ	400	50	685	112	0.30	52	59	58	3925	15	2310	0.06
3	Δ	400	50	675	121	0.30	48	54	54	3240	30	1905	0.12
4	Δ	400	50	665	130	0.31	48	55	54	2545	40	1500	0.16
5	Y	400	50	585	67	0.12	52	58	57	3790	0	2230	0.00
6	Y	400	50	560	73	0.13	50	56	56	3200	10	1885	0.04
7	Y	400	50	540	77	0.14	45	52	52	2555	19	1505	0.08
8	Y	400	50	525	80	0.15	44	51	51	1975	24	1160	0.10

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_V = Air flow · p_{fs} = Pressure increase




AC axial fan - HyBlade

sickled blades (S series)

with guard grille for full nozzle

Charts: Air flow 60 Hz

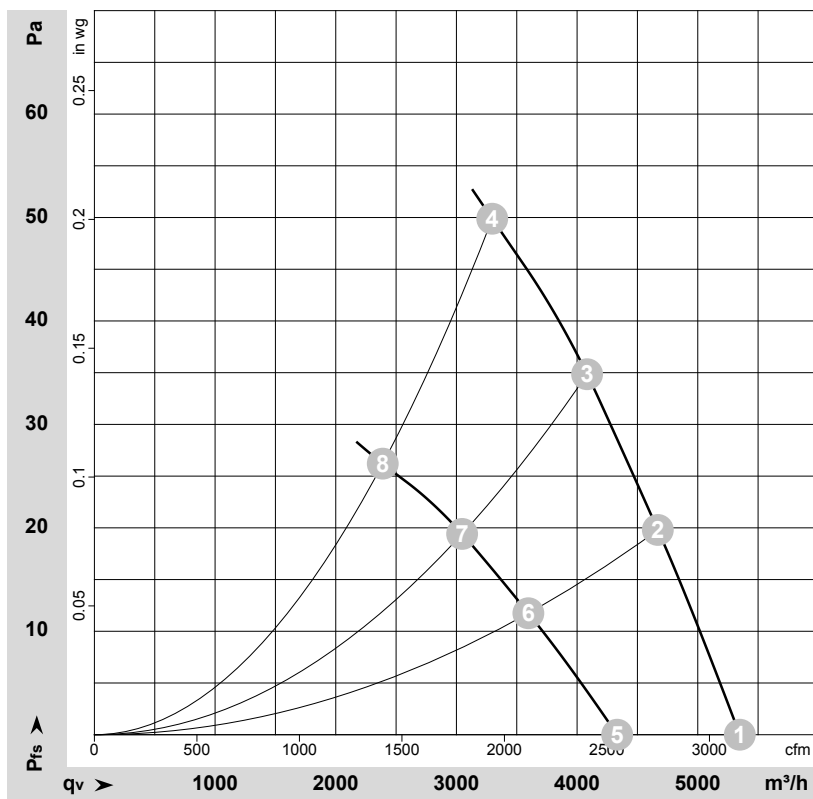

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-154157-1
Measurement: LU-146673-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	inH ₂ O
1	Δ	480	60	820	150	0.31	59	65	65	5350	0	3150	0.00
2	Δ	480	60	805	166	0.32	56	62	62	4670	20	2750	0.08
3	Δ	480	60	800	177	0.33	53	60	59	4085	35	2405	0.14
4	Δ	480	60	780	190	0.34	52	59	58	3295	50	1940	0.20
5	Y	480	60	660	101	0.15	54	60	60	4330	0	2550	0.00
6	Y	480	60	625	109	0.16	52	58	58	3595	12	2115	0.05
7	Y	480	60	600	113	0.17	50	56	55	3045	19	1795	0.08
8	Y	480	60	570	120	0.18	47	53	53	2390	26	1405	0.10

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

