

W1G130-AA25-14 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W1G130-AA25-14		
Motor	M1G055-AI		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50/60	50/60
Type of data definition		ml	ml
Speed (rpm)	min ⁻¹	2800	3200
Power input	W		24
Current draw	A		0.19
Max. back pressure	Pa		90
Min. ambient temperature	°C	-30	-30
Max. ambient temperature	°C	70	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations




Technical features

Mass	0.75 kg
Size	130 mm
Motor size	55
Material of impeller	PA plastic
Material of wall ring	Plastic, PP
Number of blades	7
Direction of air flow	V
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP55; Only with suitable connector, which has to be fitted by the customer
Insulation class	"B"
Humidity (F) / environmental protection class (H)	H1+
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensation drainage holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Speed selection max/min - Soft start - Over-temperature protected motor
Speed steps	2
Electrical connection	Plug
Motor protection	Thermal overload protector (TOP) wired internally
Protection class	II
Product conforming to standard	EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; CE
Approval	VDE; CSA C22.2 no. 77 + CAN/CSA-E60730-1; EAC; UL 1004-3 + 60730-1




Product drawing

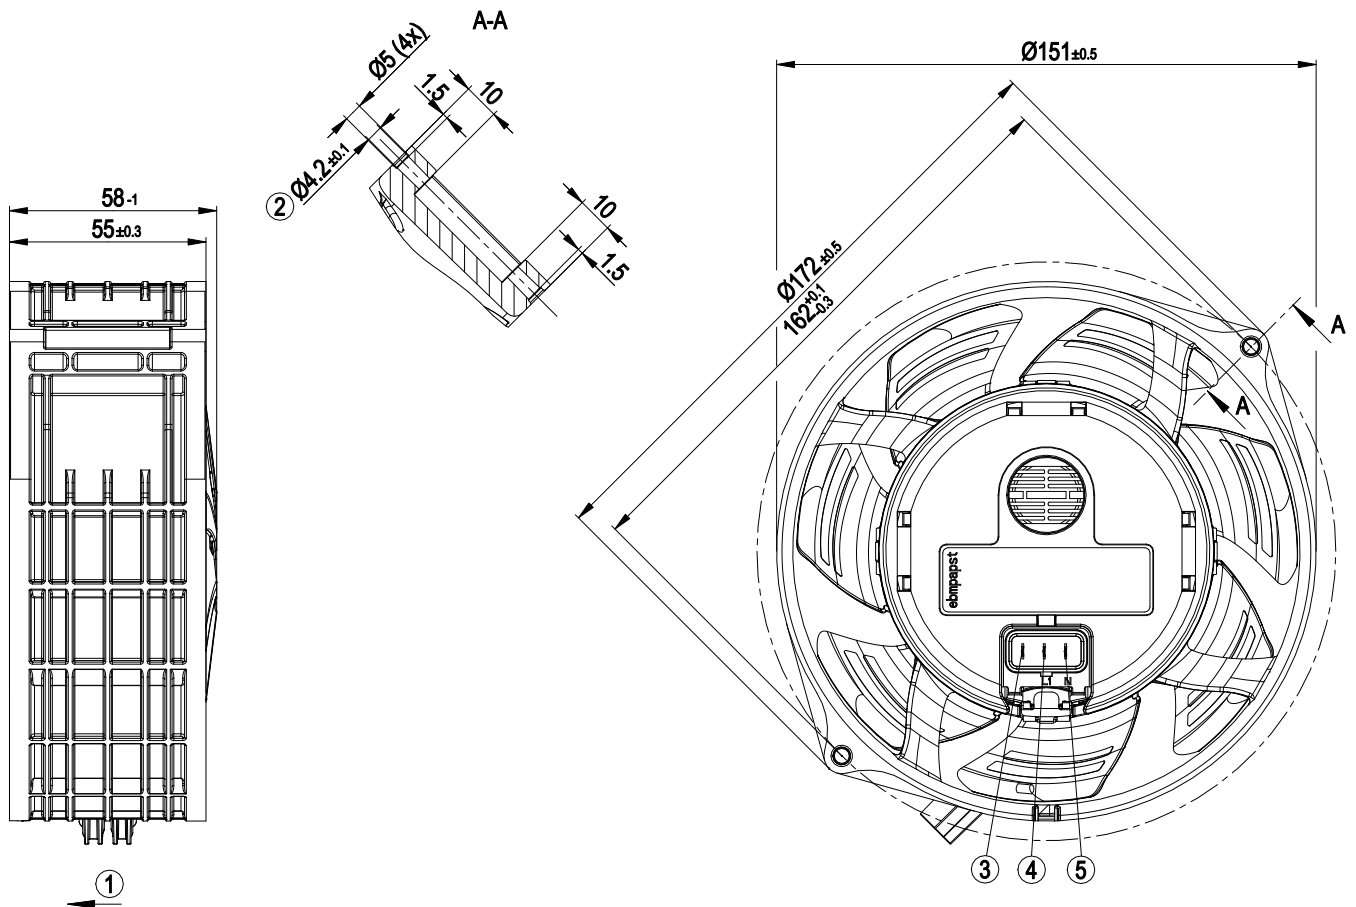


1	Direction of air flow "V"
2	Preferably fit 2x Remform bolt WN-156-2 5.0x16 Torx galvanized (Arnold). Alternatively 2x metric bolt M4, fastening with nut
3	PIN S, speed selection (flat connector 2.8 x 0.5)
4	PIN L1, phase (flat connector 2.8 x 0.5)
5	PIN N, neutral conductor (flat connector 2.8 x 0.5)

Connection screen

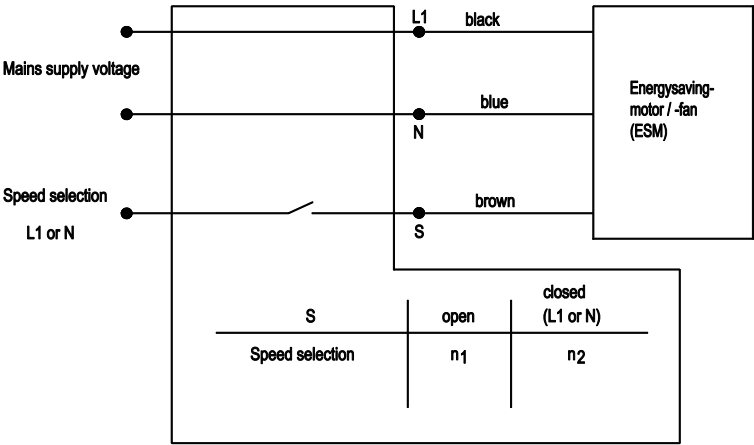

Charts: Air flow 50 Hz

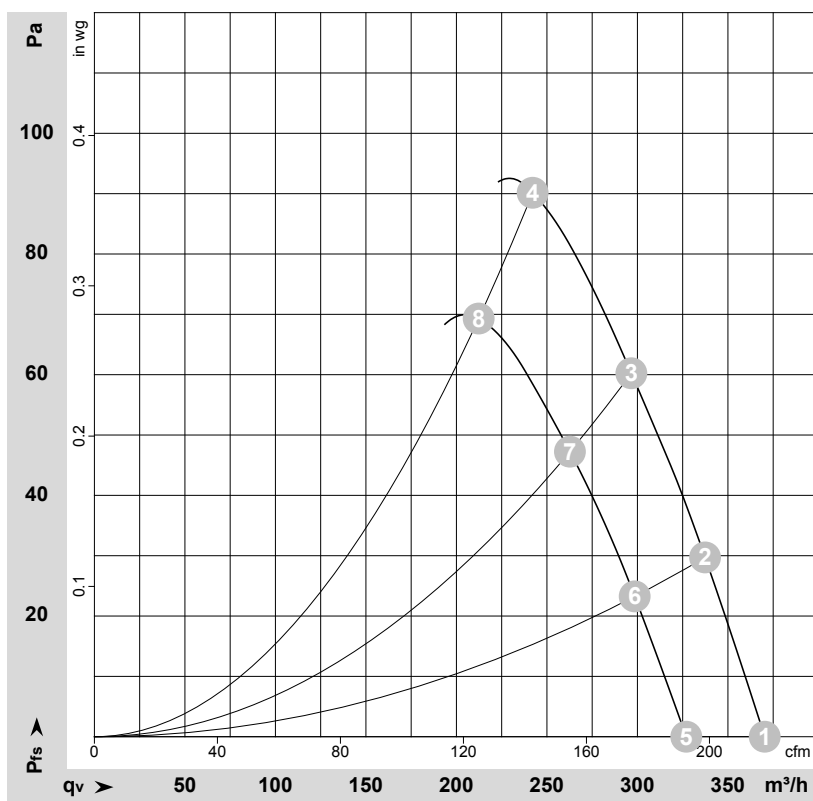

$$\rho = 1.177 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-139739-1
Measurement: LU-140010-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	230	50	3200	23	0.19	55	63	370	0	220	0.00
2	230	50	3200	24	0.19	53	61	335	30	200	0.12
3	230	50	3200	24	0.19	51	60	295	60	175	0.24
4	230	50	3200	24	0.19	54	63	240	90	140	0.36
5	230	50	2800	16	0.13	51	60	325	0	190	0.00
6	230	50	2800	16	0.13	50	58	300	24	175	0.10
7	230	50	2800	16	0.13	48	57	265	47	155	0.19
8	230	50	2800	16	0.13	53	61	210	70	125	0.28

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow
p_{fs} = Pressure increase

