

W1G180-AB57-31

EC axial fan

single-intake



W1G180-AB57-31 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	W1G180-AB57-31	
Motor	M1G074-BF	
Nominal voltage	VDC	24
Nominal voltage range	VDC	14 .. 28
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	3170
Power consumption	W	35
Current draw	A	1.6
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change




Technical description

Weight	1.7 kg
Fan size	180 mm
Rotor surface	Galvanized
Impeller material	Glass-fiber reinforced PA plastic
Fan housing material	Die-cast aluminum, painted black
Airflow direction	"V"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F0
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Motor current limitation - Soft start
Electrical hookup	With plug
Motor protection	Reverse polarity and locked-rotor protection
With cable	Lateral
Conformity with standards	EN 60950-1
Approval	CSA C22.2 No. 77; UL 1004-1



Product drawing

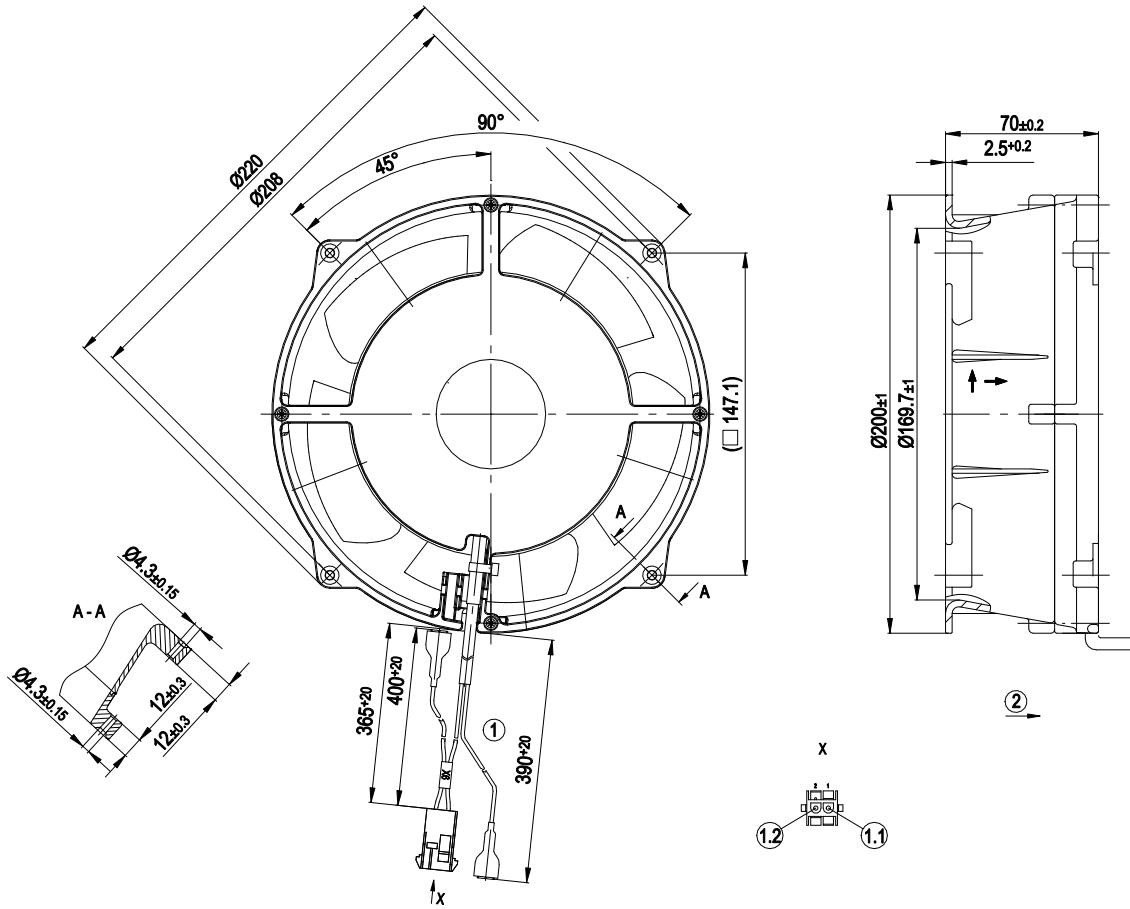


1	Cable PVC AWG20, 2-pole connector housing tyco 350778-1, 2x plug pin tyco 926885-1
1.1	UN +24 VDC
1.2	GND
2	Direction of air flow "V"



Connection diagram


Customer circuit

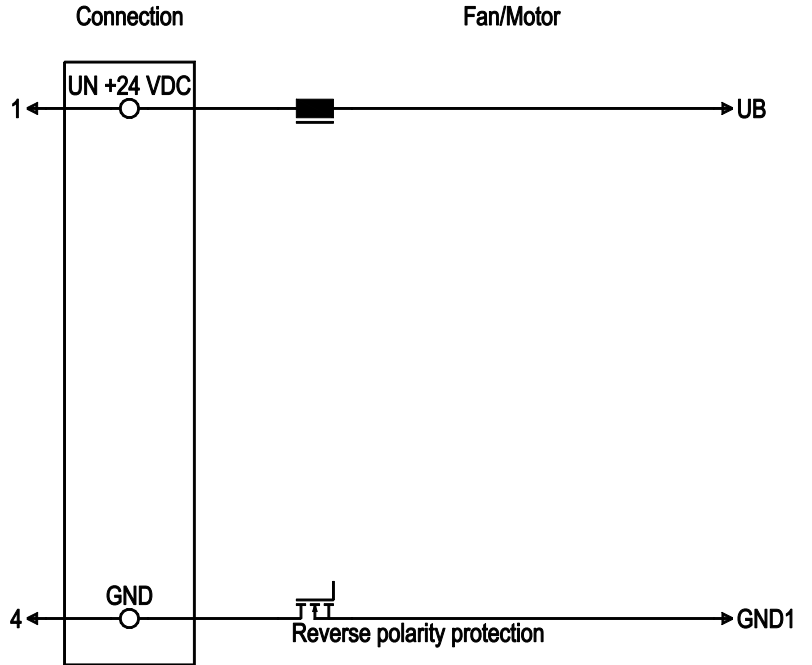

No.	Conn.	Designation	Color	Function/assignment
1	1	UN +24 VDC	red	Power supply 24 VDC, see nameplate for voltage range, maximum ripple $\pm 3.5\%$
1	2	GND	black	Reference ground



Curves: Air performance

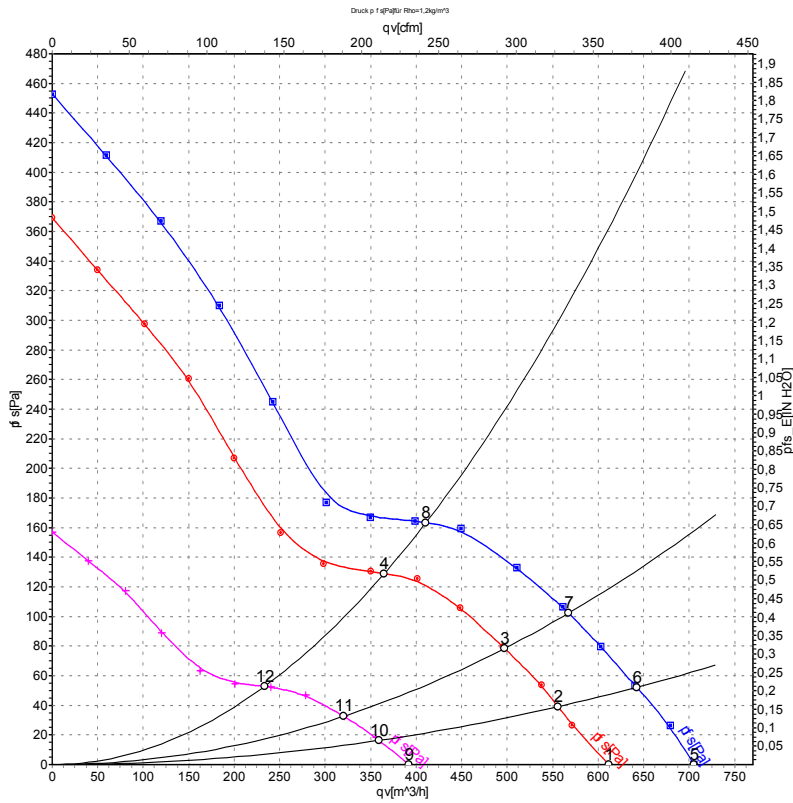

Measurement: LU-106403-1
 Measurement: LU-106408-1
 Measurement: LU-106410-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	qv	p _{fs}	qv	p _{fs}
	V	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	24	3170	35	1.60	610	0	360	0.00
2	24	3120	37	1.72	555	40	325	0.16
3	24	3080	39	1.81	495	80	295	0.32
4	24	3090	39	1.80	365	130	215	0.52
5	28	3600	48	1.89	705	0	415	0.00
6	28	3530	51	2.03	640	52	380	0.21
7	28	3465	54	2.15	565	103	335	0.41
8	28	3475	54	2.13	410	163	240	0.65
9	14	2050	11	0.91	390	0	230	0.00
10	14	2025	12	0.95	360	17	210	0.07
11	14	2005	12	1.01	320	33	190	0.13
12	14	2000	12	1.01	235	53	135	0.21

U = Power supply · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

