

EC axial fan

sickled blades (S series)
ESM wall ring

W1G200-EA95-46 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W1G200-EA95-46		
Motor	M1G055-BD		
Phase		1~	1~
Nominal voltage	VAC	115	115
Frequency	Hz		50/60
Type of data definition			ml
Speed	min ⁻¹	1000	1200
Power input	W	-	8
Current draw	A		0.12
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	50	50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



Technical features


Mass	1.0 kg
Size	200 mm
Surface of rotor	Coated in black
Material of blades	Sheet steel, coated in black
Material of wall ring	PP-TD20 plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Speed selection max/min - Soft start - Over-temperature protected motor
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Lateral
Protection class	II
Product conforming to standard	EN 60335-1; CE
Approval	UL 2111; VDE; CSA C22.2 Nr.77

EC axial fan

sickled blades (S series)


ESM wall ring

Product drawing

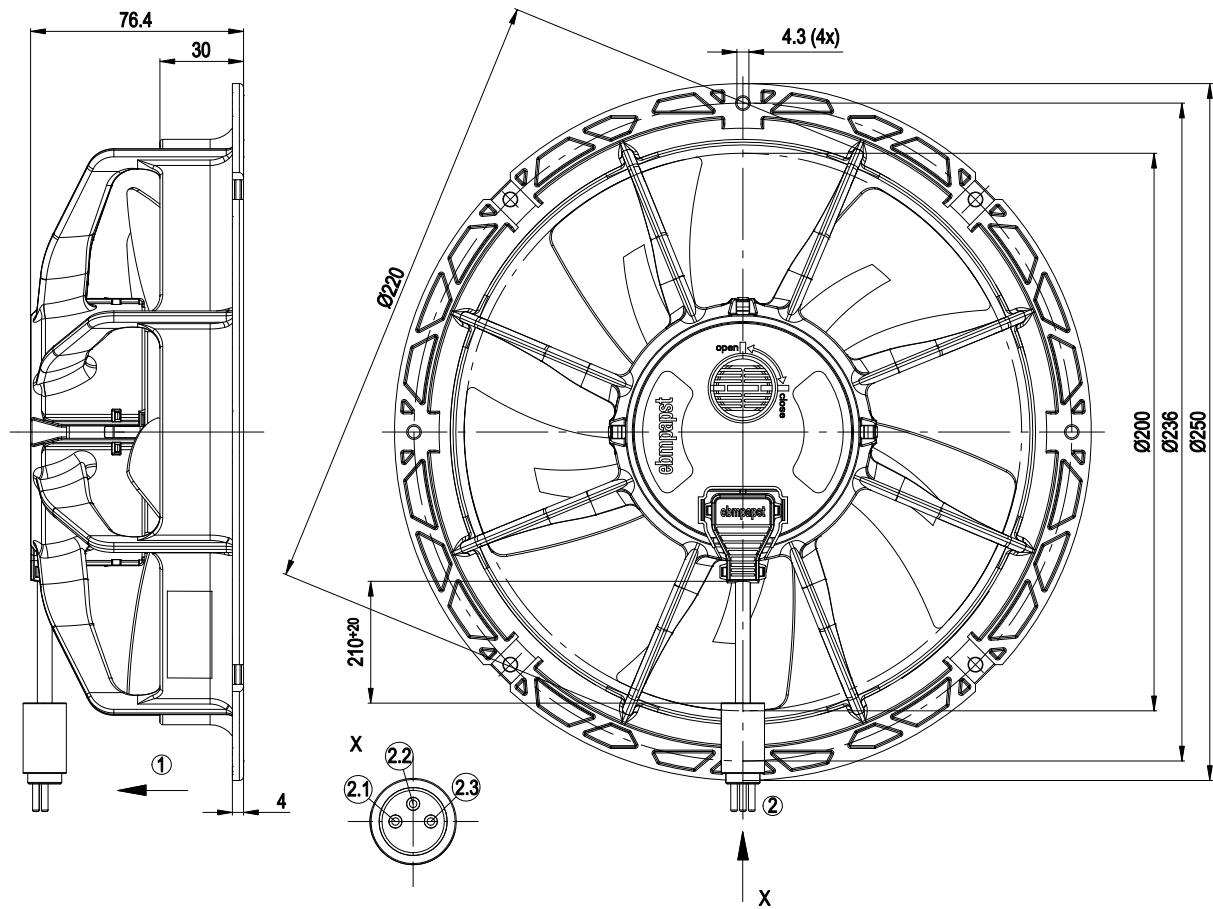


1	Direction of air flow "V"
2	Plug: EMF no. P-3-4-100
2.1	N (blue)
2.2	S (brown)
2.3	L (black)

Connection screen

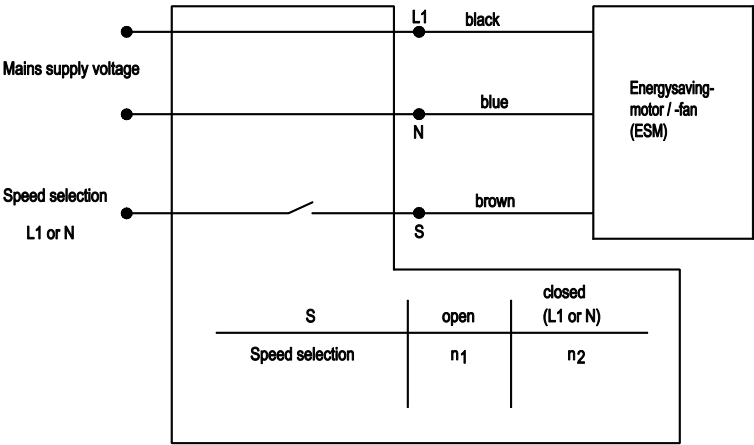

EC axial fan
sickled blades (S series)
ESM wall ring

Charts: Air flow 50 Hz

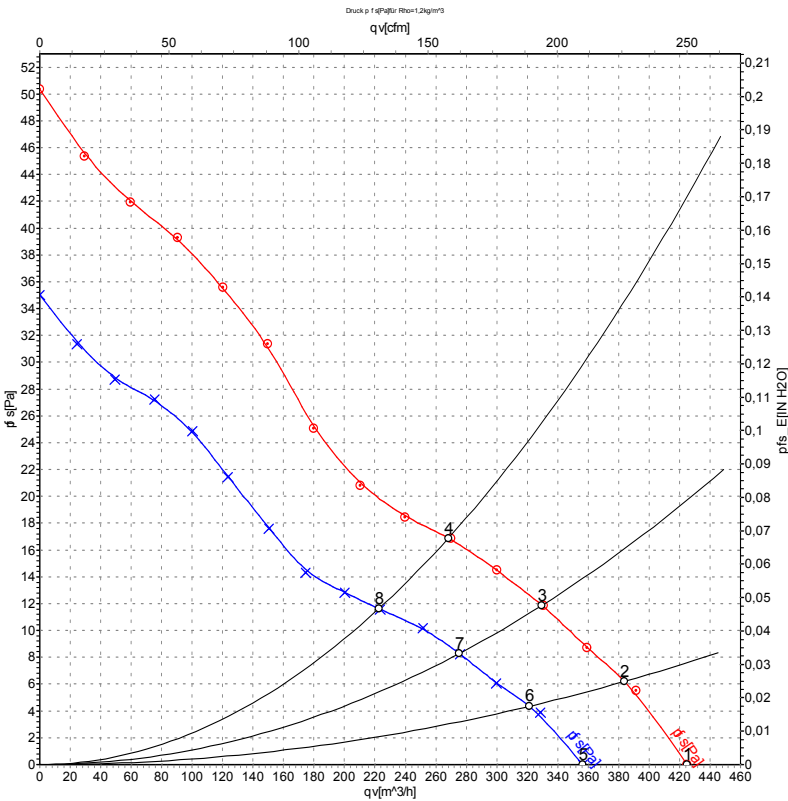

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _{ed}	I	qv	P _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	115	50	1200	6.4	0.10	425	0
2	115	50	1200	7.5	0.11	385	6
3	115	50	1200	8.0	0.12	330	12
4	115	50	1200	8.0	0.12	270	17
5	115	50	1000	3.8	0.06	355	0
6	115	50	1000	4.4	0.07	320	4
7	115	50	1000	4.6	0.07	275	8
8	115	50	1000	4.5	0.07	225	12

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · qv = Air flow · P_{fs} = Pressure increase

