

EC axial fan - ESM

sickled blades (S series)
ESM wall ring



W1G200-EC95-23 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W1G200-EC95-23	
Motor	M1G055-BD	
Phase		1~
Nominal voltage	VAC	115
Nominal voltage range	VAC	115 .. 127
Frequency	Hz	50/60
Type of data definition		ml
Speed	min ⁻¹	1800
Power input	W	22
Current draw	A	0.33
Min. ambient temperature	°C	-30
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



Technical features


Mass	0.9 kg
Size	200 mm
Surface of rotor	Cast in PA plastic
Material of blades	PA plastic
Material of wall ring	PP plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- ESM+ extensible with plug-in module - Soft start - Over-temperature protected motor
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Lateral
Protection class	II
Product conforming to standard	EN 60335-1; CE
Approval	UL 2111; VDE; EAC; CSA C22.2 Nr.77

EC axial fan - ESM

sickled blades (S series)


ESM wall ring

Product drawing

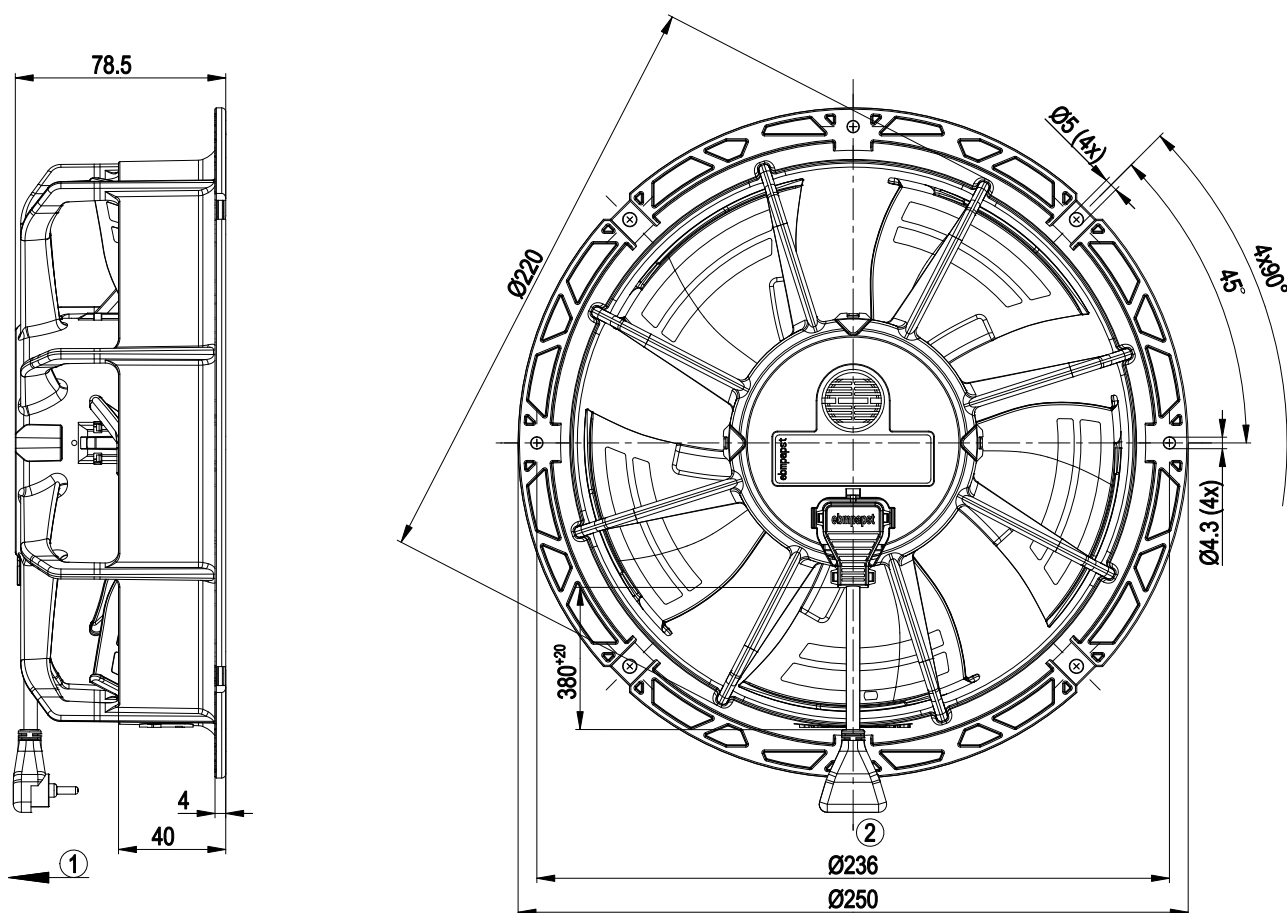


- | | |
|---|--|
| 1 | Direction of air flow "V" |
| 2 | Connection line AWG20, 2x plug contact Heyco 7033 crimped with plug similar to EMF Corporation P-2-3 |

Connection screen

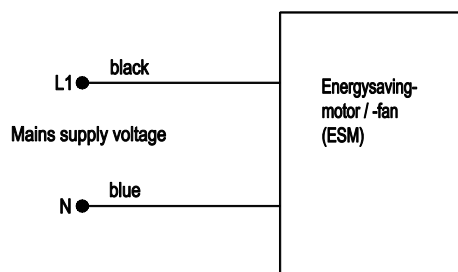

Charts: Air flow 50 Hz

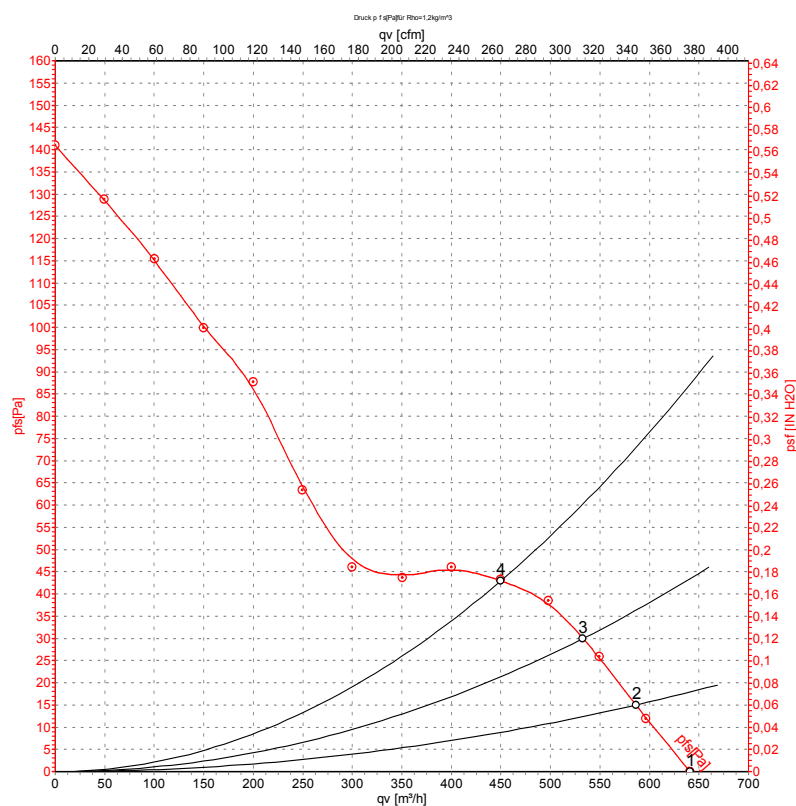

Measurement: LU-132845

Air performance measured as per ISO 5801
 Installation category A. For detailed
 information on the measuring set-up, please
 contact ebm-papst. Suction-side noise
 levels: L_{WA} measured as per ISO 13347 /
 L_{pA} measured with 1m distance to fan axis.
 The values given are valid under the
 measuring conditions mentioned above and
 may vary according to the actual installation
 situation. With any deviation from the
 standard set-up, the specific values have to
 be checked and reviewed with the unit
 installed.

Measured values

	U	f	n	P _{ed}	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	115	50	1800	20	0.30	640	0
2	115	50	1800	22	0.33	585	15
3	115	50	1800	22	0.33	535	30
4	115	50	1800	22	0.33	450	42

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase