

EC axial fan - ESM

sickled blades (S series), single inlet
ESM wall ring

W1G200-EC95-64 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W1G200-EC95-64	
Motor	M1G055-BD	
Phase		1~
Nominal voltage	VAC	115
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	2100
Power input	W	31
Current draw	A	0.46
Max. back pressure	Pa	55
Min. ambient temperature	°C	-30
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



EC axial fan - ESM

sickled blades (S series), single inlet

ESM wall ring

Technical features


Mass	0.9 kg
Size	200 mm
Material of blades	PA plastic
Material of wall ring	PP plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity (F)/environmental protection class (H)	H1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- ESM+ extensible with plug-in module - Soft start - Over-temperature protected motor
Electrical leads	With plug
Motor protection	Thermal overload protector (TOP) wired internally
Protection class	II
Product conforming to standard	EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89
Approval	CSA C22.2 No.77; UL 1004-3



EC axial fan - ESM


sickled blades (S series), single inlet
ESM wall ring

Product drawing

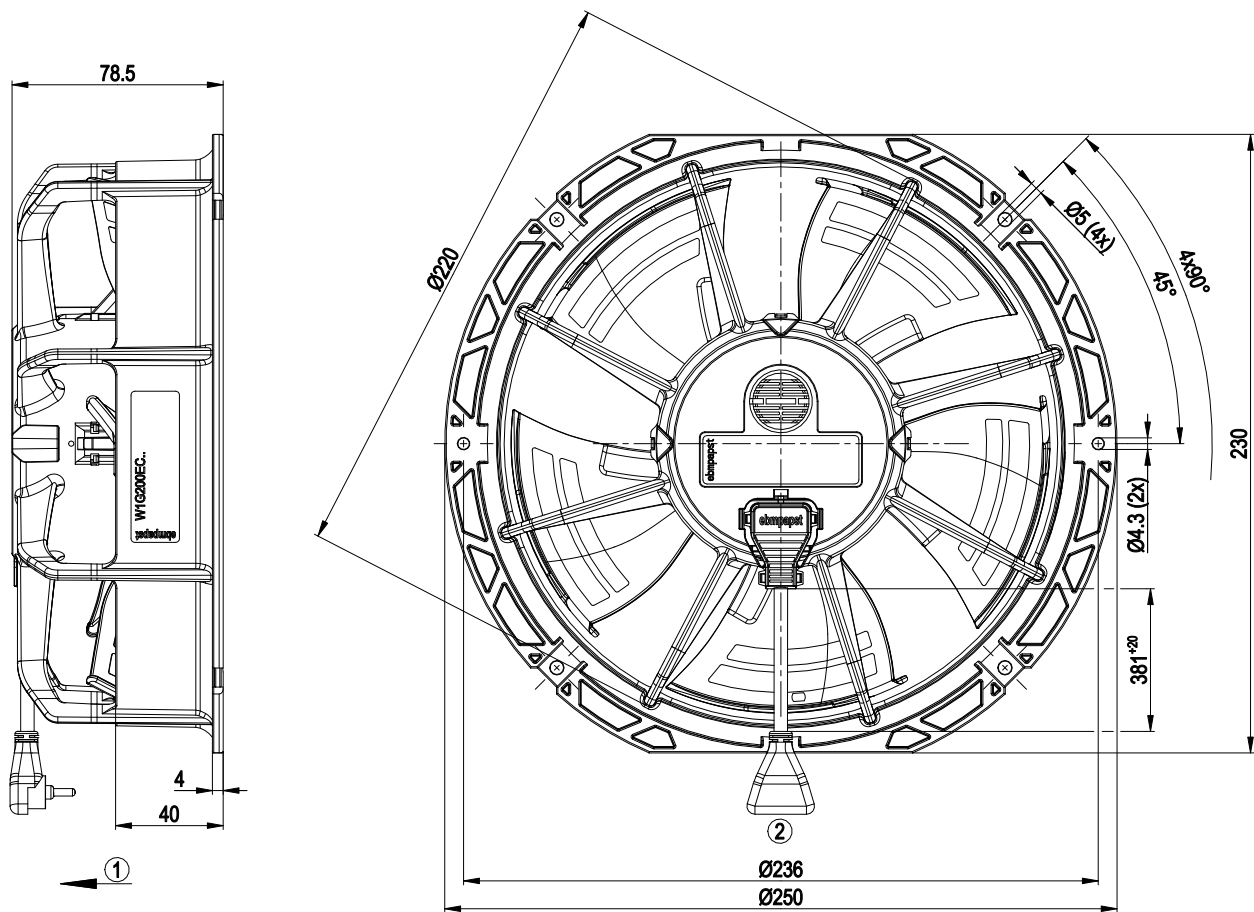

1	Direction of air flow "V"
2	Connection line PVC AWG20, 2-pole connector housing similar to EMF Corporation P-2-3, 2x plug contact Heyco 7033


Connection screen

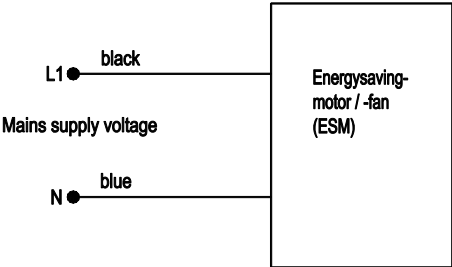

EC axial fan - ESM

sickled blades (S series), single inlet
ESM wall ring

Charts: Air flow 50 Hz

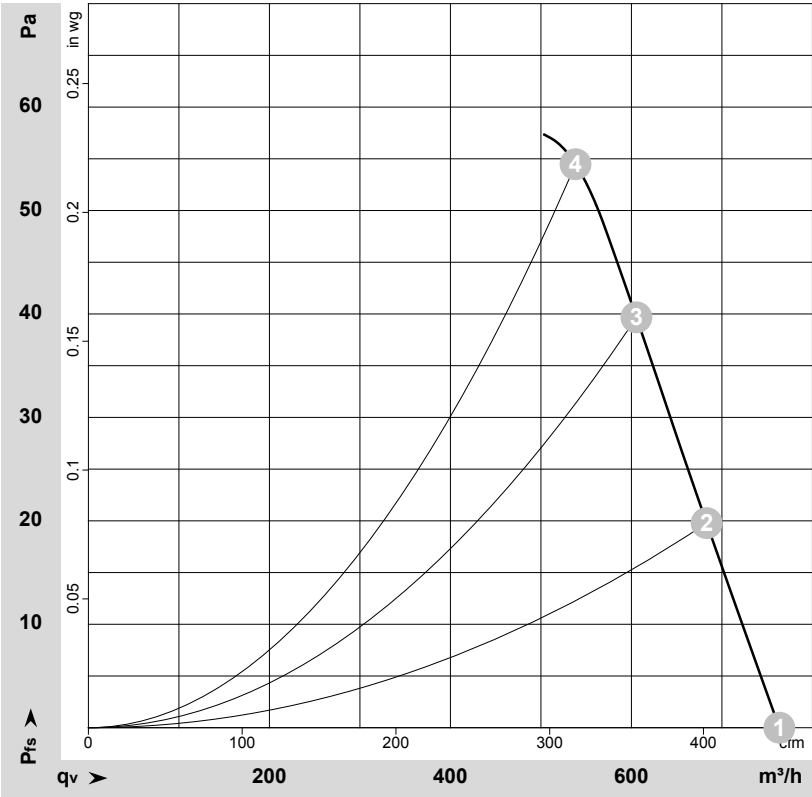

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-127262-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Stage	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH2O
1	1	115	50	2100	28	0.42	765	0	450	0.00
2	1	115	50	2100	30	0.45	685	20	400	0.08
3	1	115	50	2100	31	0.46	605	40	355	0.16
4	1	115	50	2100	31	0.46	540	55	315	0.22

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

