

EC axial fan - ESM

sickle-shaped blades (S series)
ESM fan housing

W1G200-EG57-13 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W1G200-EG57-13		
Motor	M1G055-AI		
Phase		1~	1~
Nominal voltage	VAC	230	230
Nominal voltage range	VAC	200 .. 240	200 .. 240
Frequency	Hz	50/60	50/60
Method of obtaining data		ml	
Speed (rpm)	min ⁻¹	1350	1050
Power consumption	W	10	
Current draw	A	0.09	
Max. back pressure	Pa	25	
Max. back pressure	in. wg	0.1	
Min. ambient temperature	°C	-30	-30
Max. ambient temperature	°C	50	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



Technical description


Weight	0.743 kg
Size	200 mm
Motor size	55
Blade material	PP plastic
Fan housing material	PP plastic
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP55; only with suitable plug, to be installed by customer
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Speed setting input (230 V) - Power limiter - Motor current limitation - Soft start - Thermal overload protection for motor
Speed levels	2
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Electrical hookup	Plug
With cable	Lateral
Protection class	II
Conformity with standards	EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; EN 60034-1; EN 60204-1; CE
Approval	EAC; VDE

EC axial fan - ESM

sickle-shaped blades (S series)

ESM fan housing

Product drawing

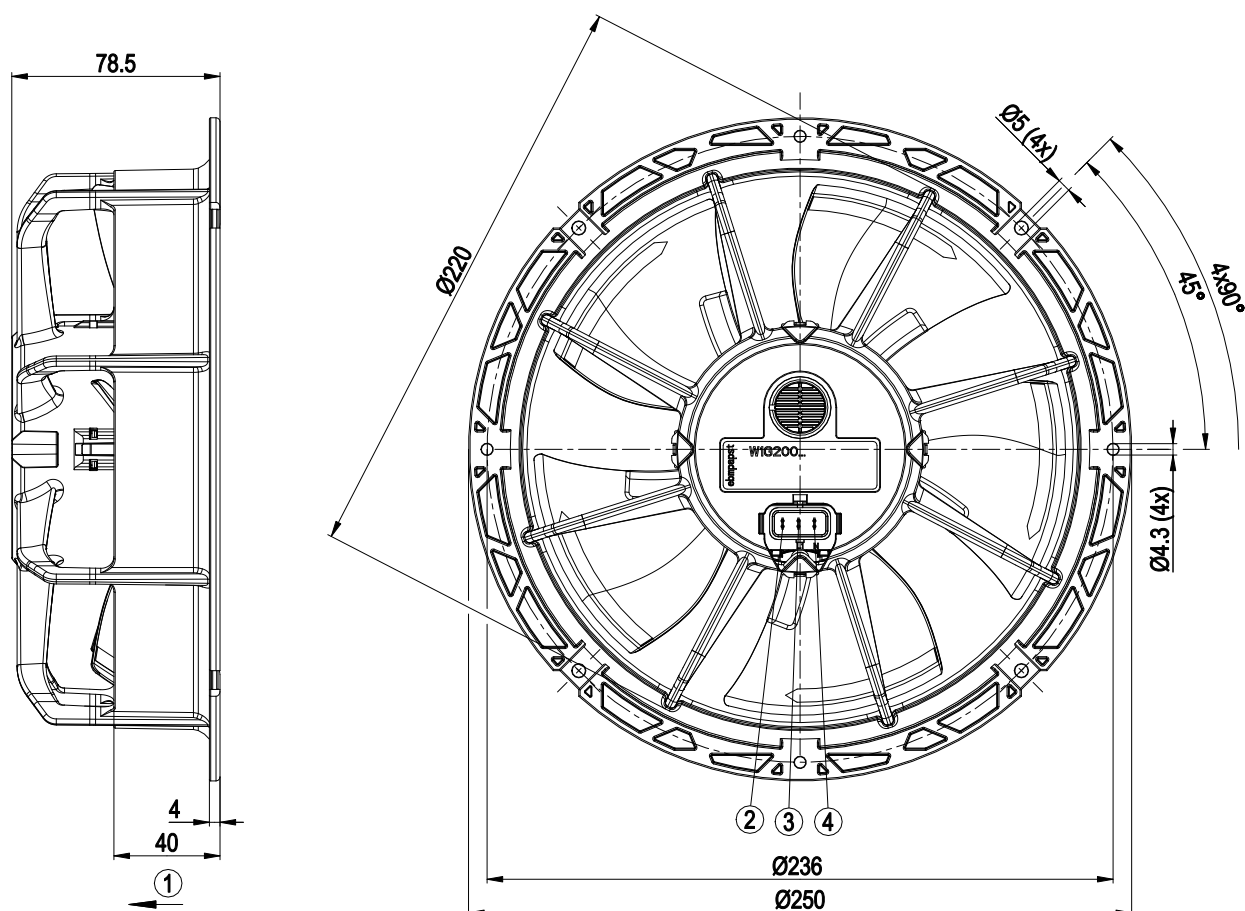


1	Airflow direction "V"
2	Pin S, speed selection (flat plug 2.8 x 0.5)
3	Pin L1, phase (flat plug 2.8 x 0.5)
4	Pin N, neutral conductor (flat plug 2.8 x 0.5)



EC axial fan - ESM

sickle-shaped blades (S series)
ESM fan housing


Connection diagram

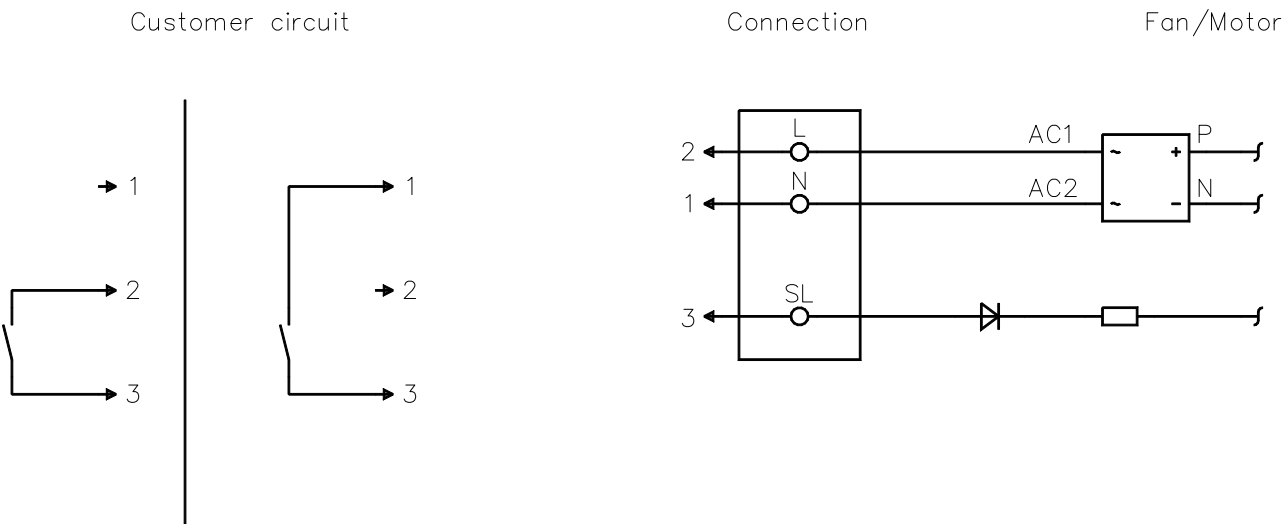

No.	Conn.	Designation	Color	Function/assignment
1	N		blue	Power supply, neutral conductor, see nameplate for voltage range
2	L		black	Power supply, phase, see nameplate for voltage range
3	SL		brown	Speed selection: switch open speed 1, switch closed speed 2



Curves: Air performance 50 Hz

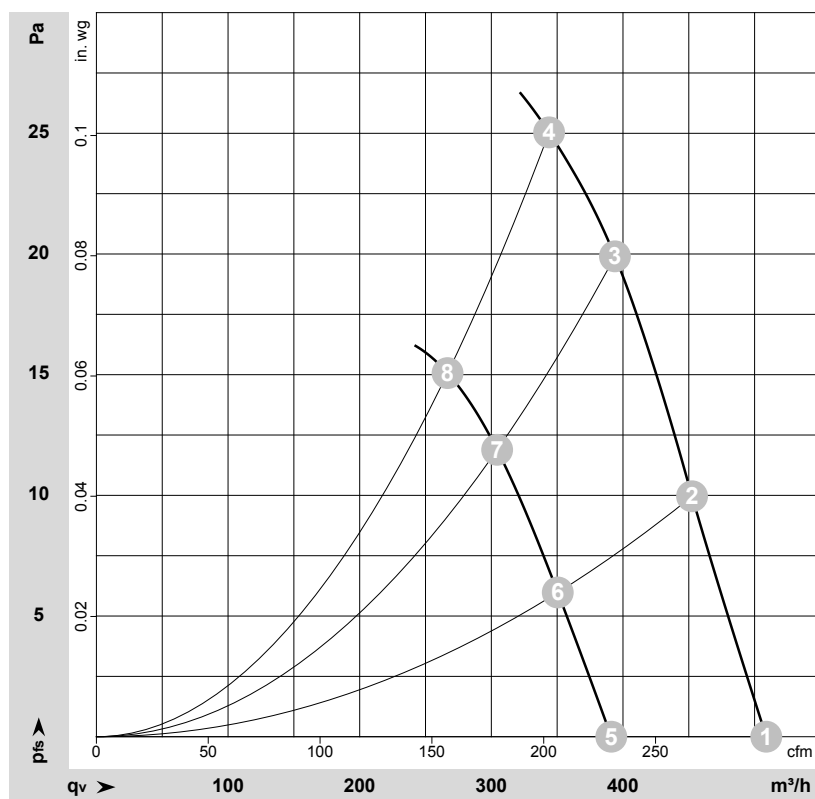

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-196702-1
Measurement: LU-200190-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Stage	Wired	U	f	n	P_{ed}	I	LpA_{in}	LwA_{in}	q_v	p_{fs}	q_v	p_{fs}
			V	Hz	min^{-1}	W	A	dB(A)	dB(A)	m^3/h	Pa	cfm	in. wg
1	1	1~	230	50	1350	8.0	0.07	40	47	510	0	300	0.00
2	1	1~	230	50	1350	9.0	0.08	37	45	450	10	265	0.04
3	1	1~	230	50	1350	9.0	0.09	36	45	395	20	230	0.08
4	1	1~	230	50	1350	10.0	0.09	37	45	345	25	200	0.10
5	2	1~	230	50	1050	4.0	0.04	32	40	390	0	230	0.00
6	2	1~	230	50	1050	5.0	0.05	30	38	350	6	205	0.02
7	2	1~	230	50	1050	5.0	0.05	30	39	305	12	180	0.05
8	2	1~	230	50	1050	5.0	0.05	31	40	265	15	155	0.06

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 q_v = Air flow · p_{fs} = Pressure increase

