

AC axial fan - HyBlade

sickle-shaped blades (S series)

with square short nozzle

W2D250-GQ02-09 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W2D250-GQ02-09		
Motor	M2D068-DF		
Phase		3~	3~
Nominal voltage	VAC	400	400
Nominal voltage range	VAC	380 .. 415	380 .. 415
Wiring		Y	Y
Frequency	Hz	50	60
Method of obtaining data		ml	ml
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	2550	2750
Power consumption	W	125	175
Current draw	A	0.23	0.28
Max. back pressure	Pa	110	145
Max. back pressure	in. wg	0.44	0.58
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	70	60
Starting current	A	0.73	0.73

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC axial fan - HyBlade

sickle-shaped blades (S series)

with square short nozzle

Technical description


Size	250 mm
Motor size	68
Rotor surface	Painted black
Impeller material	Sheet steel, hot-dip galvanized
Fan housing material	Sheet steel, pre-galvanized and coated with black plastic
Guard grille material	Steel, phosphated and coated with black plastic
Number of blades	7
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP00
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
With cable	Lateral
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE
Approval	UL 1004-1; CSA C22.2 No. 100



AC axial fan - HyBlade

sickle-shaped blades (S series)
with square short nozzle

Product drawing

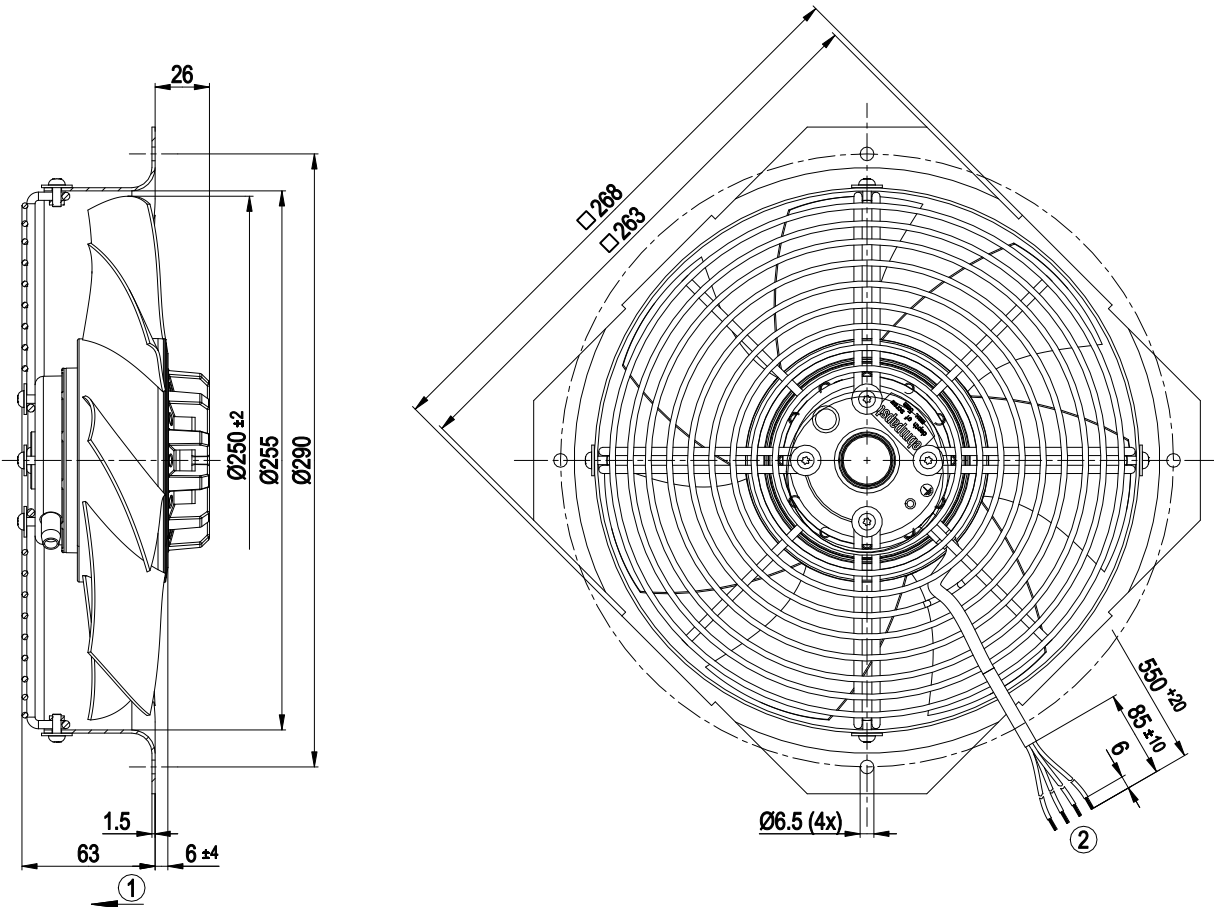


1	Airflow direction "V"
2	Cable PVC 4G 0.5 mm ²
	4x splice



AC axial fan - HyBlade

sickle-shaped blades (S series)
with square short nozzle

Connection diagram

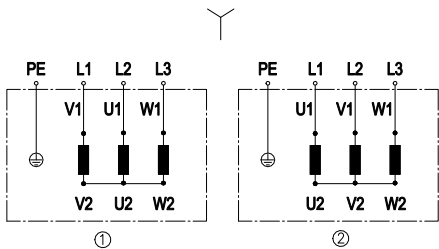

Change of rotation direction by reversing two phases


	Three-phase motor
Y	Star connection
1	Counterclockwise operation
L1	= V1 = blue
L2	= U1 = black
L3	= W1 = brown
2	Clockwise operation
L1	= V1 = black
L2	= U1 = blue
L3	= W1 = brown
PE	green/yellow



AC axial fan - HyBlade

sickle-shaped blades (S series)
with square short nozzle

Curves: Air performance 50 Hz

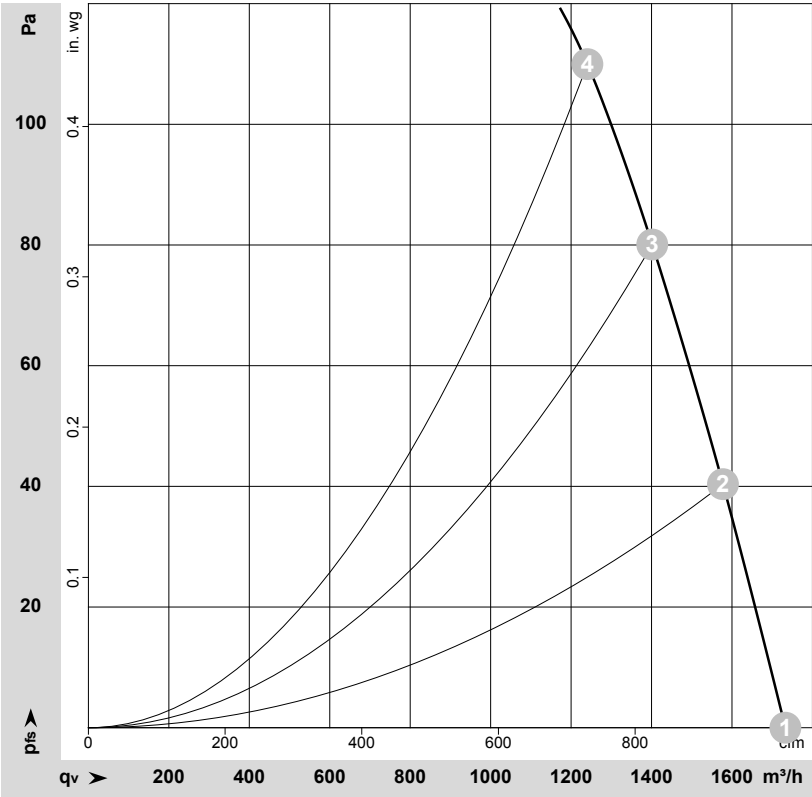

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-185387-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	Y	400	50	2695	96	0.21	1735	0	1020	0.00
2	Y	400	50	2645	107	0.22	1580	40	930	0.16
3	Y	400	50	2605	117	0.23	1400	80	825	0.32
4	Y	400	50	2550	125	0.23	1240	110	730	0.44


Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase



AC axial fan - HyBlade

sickle-shaped blades (S series)
with square short nozzle

Curves: Air performance 60 Hz

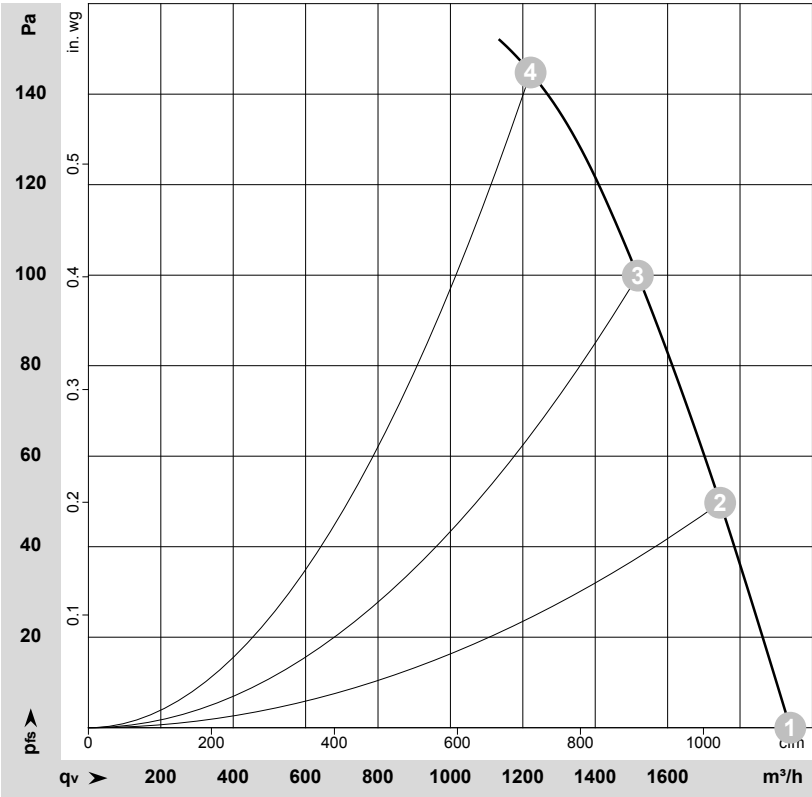

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-185496-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	Y	400	60	3000	135	0.23	1940	0	1140	0.00
2	Y	400	60	2910	151	0.25	1745	50	1025	0.20
3	Y	400	60	2830	165	0.28	1520	100	895	0.40
4	Y	400	60	2750	175	0.28	1220	145	720	0.58

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

