

W2D300-CQ01-15 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W2D300-CQ01-15		
Motor	M2D074-EI		
Phase		3~	3~
Nominal voltage	VAC	400	400
Wiring		Y	Y
Frequency	Hz	50	60
Method of obtaining data		fa	fa
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	2650	2900
Power consumption	W	195	290
Current draw	A	0.36	0.48
Max. back pressure	Pa	125	140
Max. back pressure	inH ₂ O	0.5	0.56
Max. ambient temperature	°C	90	75
Starting current	A	1.65	1.6

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	33	29.9
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		43.1	40
05 Variable speed drive		No	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_e	kW	0.25
09 Air flow q_v	m ³ /h	2100
09 Pressure increase p_{fs}	Pa	143
10 Speed (rpm) n	min ⁻¹	2515
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-68886



AC axial fan

sickle-shaped blades (S series)

Fan housing with guard grille

Technical description


Weight	6 kg
Fan size	300 mm
Rotor surface	Painted black
Blade material	Sheet steel, painted black
Fan housing material	Sheet steel, galvanized and coated with black plastic (RAL 9005)
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	"A"
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H0+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1
Approval	CSA C22.2 No. 100; UL 1004-1



AC axial fan

sickle-shaped blades (S series)
Fan housing with guard grille

Product drawing

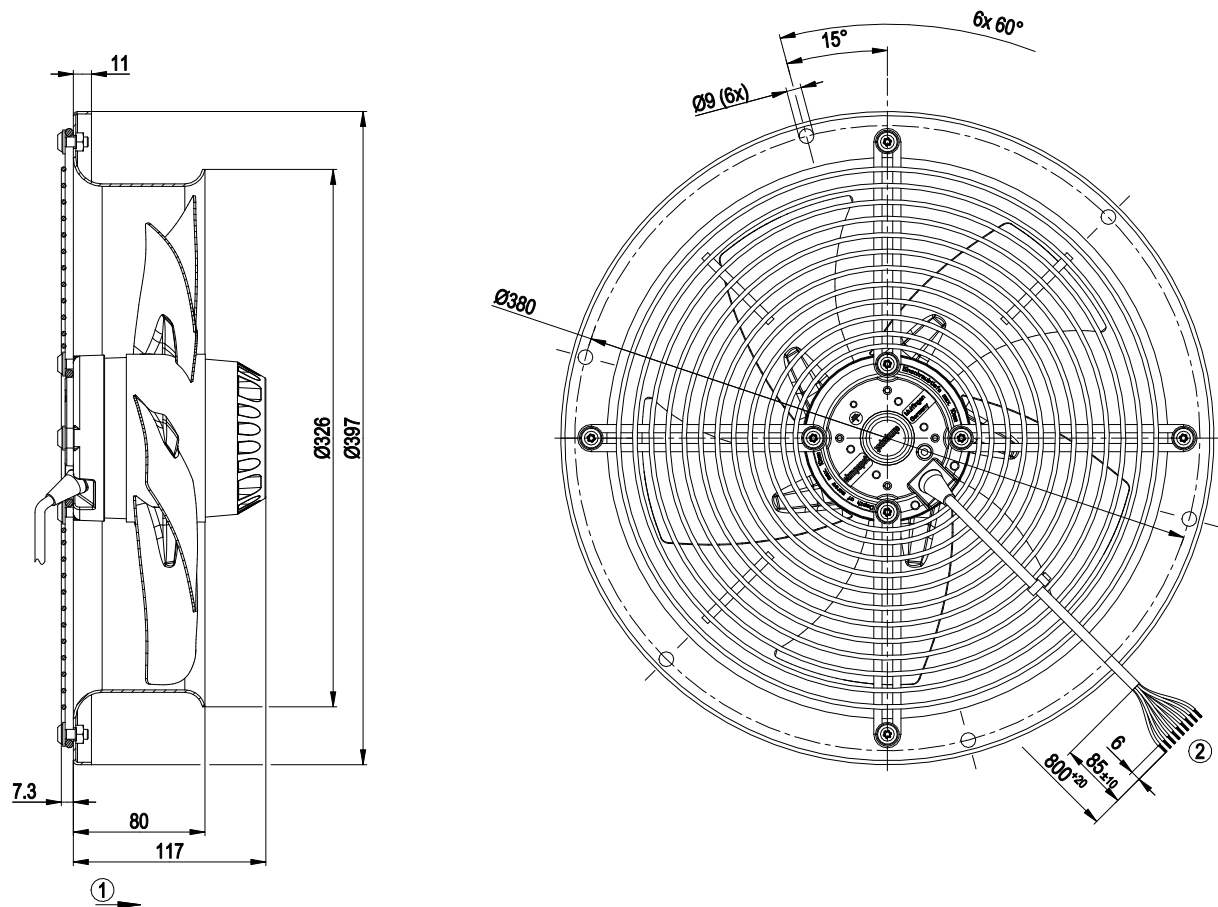


- | | |
|---|---|
| 1 | Direction of air flow "A" |
| 2 | Cable PFA AWG18, 1x crimped splice, cable PFA AWG20, 8x crimped splices |



AC axial fan

sickle-shaped blades (S series)
Fan housing with guard grille

Connection diagram



Note: Change of rotation direction by reversing two phases


Y	Star connection	L1	black	L2	blue
L3	brown	U1	black	V1	blue
W1	brown	U2	green	V2	white
W2	yellow	PE	green/yellow		



AC axial fan

sickle-shaped blades (S series)
Fan housing with guard grille

Curves: Air performance 50 Hz

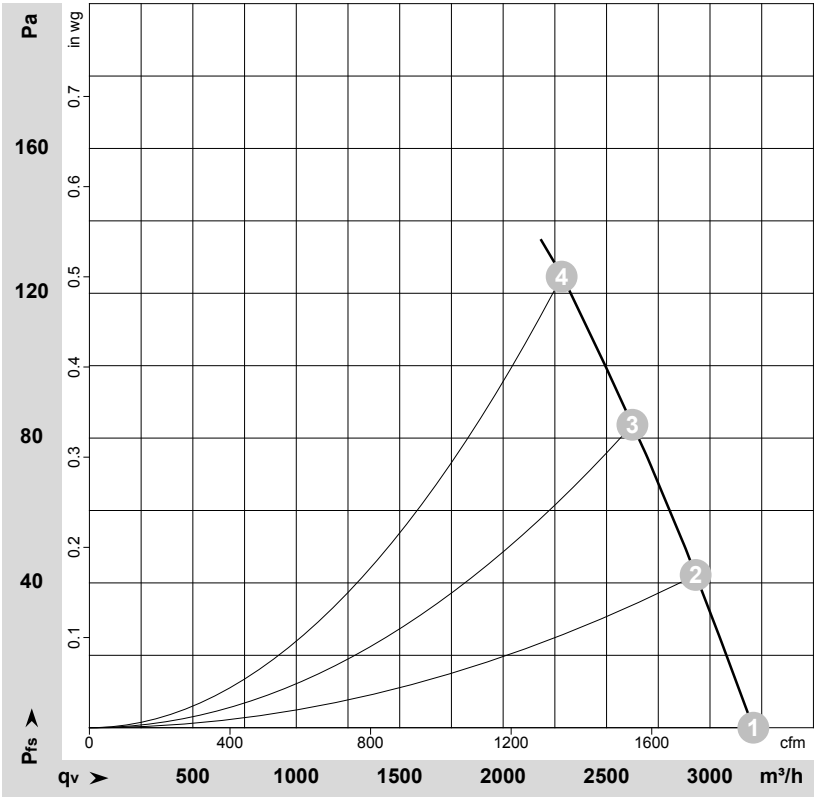

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-68886-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	inH ₂ O
1	400	50	2650	195	0.36	3210	0	1890	0.00
2	400	50	2600	215	0.39	2930	40	1725	0.16
3	400	50	2565	231	0.41	2625	85	1545	0.34
4	400	50	2535	244	0.43	2285	125	1345	0.50


U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · P_{fs} = Pressure increase



AC axial fan

sickle-shaped blades (S series)
Fan housing with guard grille

Curves: Air performance 60 Hz

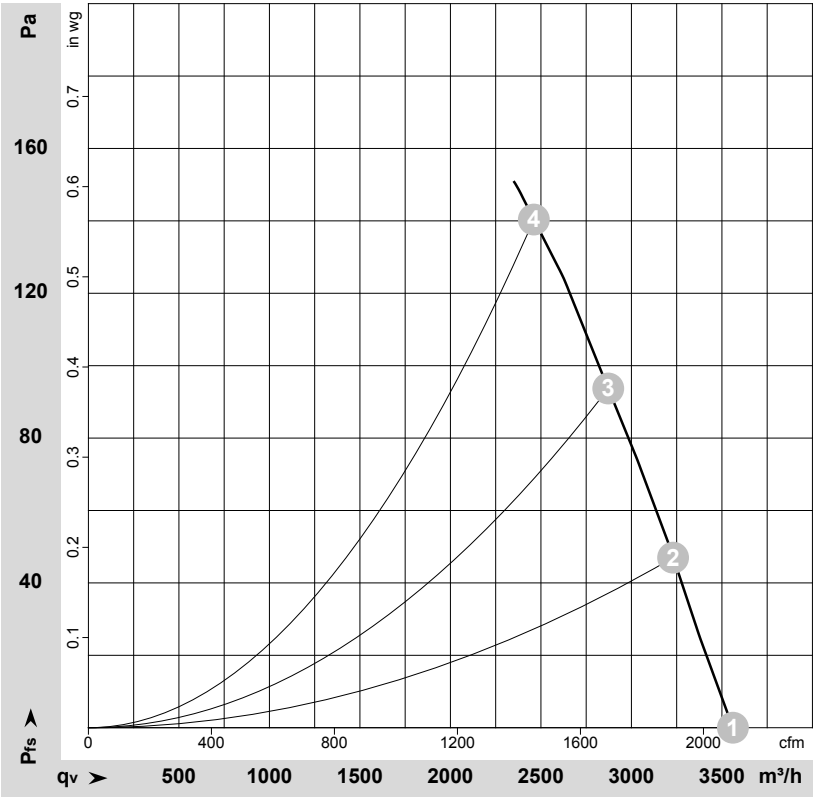

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-68885-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	inH ₂ O
1	400	60	2900	290	0.48	3560	0	2095	0.00
2	400	60	2835	313	0.51	3230	45	1900	0.18
3	400	60	2775	331	0.54	2870	95	1690	0.38
4	400	60	2705	351	0.57	2460	140	1450	0.56

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

