

AC axial compact fan

sickle-shaped blades (S series), single-intake

W2S130-AA27-01 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W2S130-AA27-01		
Motor	M2S052-CA		
Phase		1~	1~
Nominal voltage	VAC	24	24
Frequency	Hz	50	60
Method of obtaining data		fa	fa
Valid for approval/standard		-	-
Speed (rpm)	min ⁻¹	2760	3200
Power consumption	W	40	40
Current draw	A	2.25	2.2
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	50	85

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC axial compact fan

sickle-shaped blades (S series), single-intake


Technical description

Weight	1.1 kg
Fan size	130 mm
Rotor surface	Painted black
Blade material	Sheet steel, painted black
Fan housing material	Die-cast aluminum, painted black
Number of blades	7
Airflow direction	"V"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"B"
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	I (if protective earth is connected by customer to the housing's connection point)
Conformity with standards	EN 60335-1




AC axial compact fan
sickle-shaped blades (S series), single-intake

Product drawing

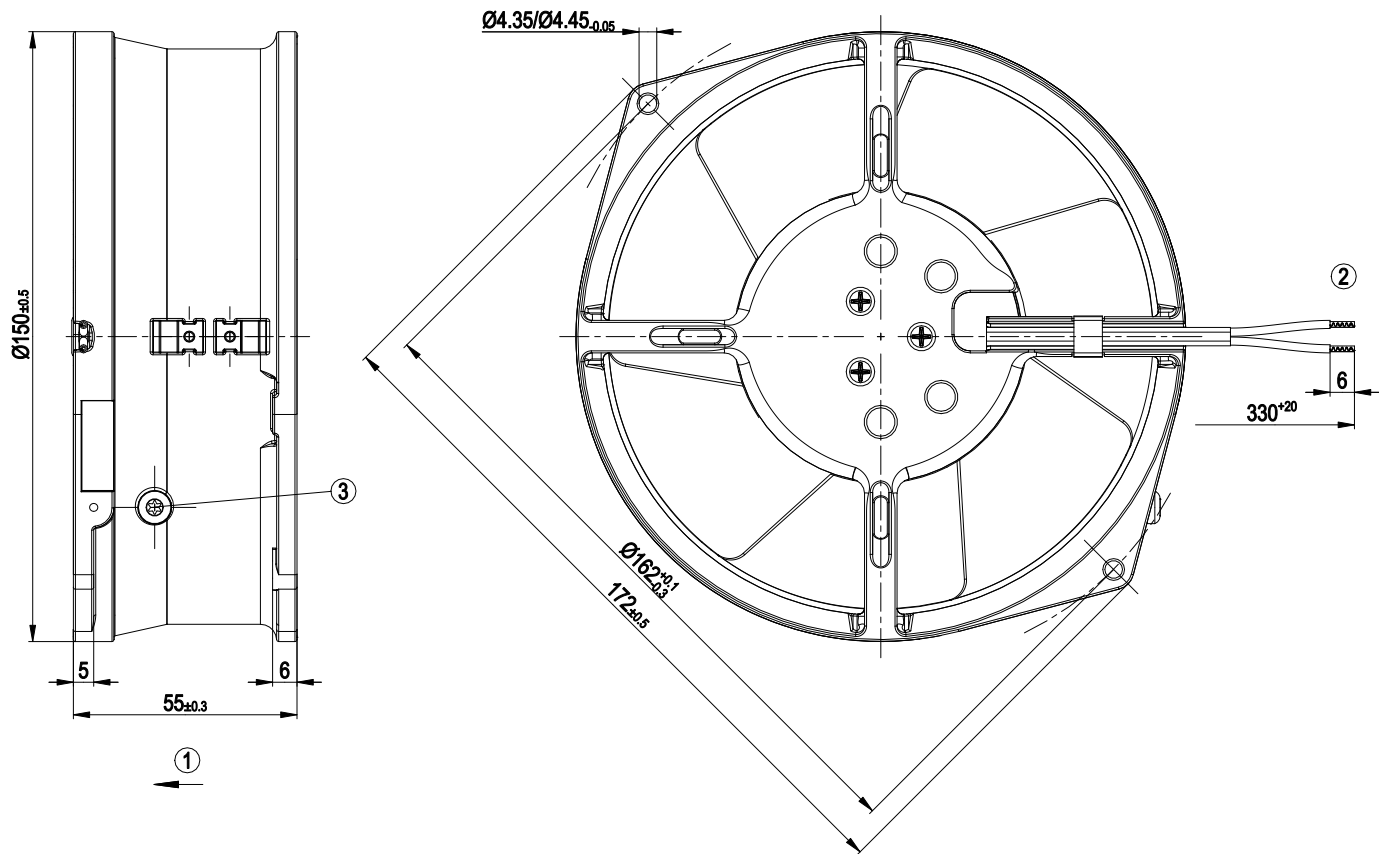

1	Direction of air flow "V"
2	Cable AWG20, 2x crimped splices
3	M4 screw for fastening ground connector

Connection diagram




L	= black
N	= black
TOP	= thermal overload protector



AC axial compact fan
sickle-shaped blades (S series), single-intake

Curves: Air performance 50 Hz

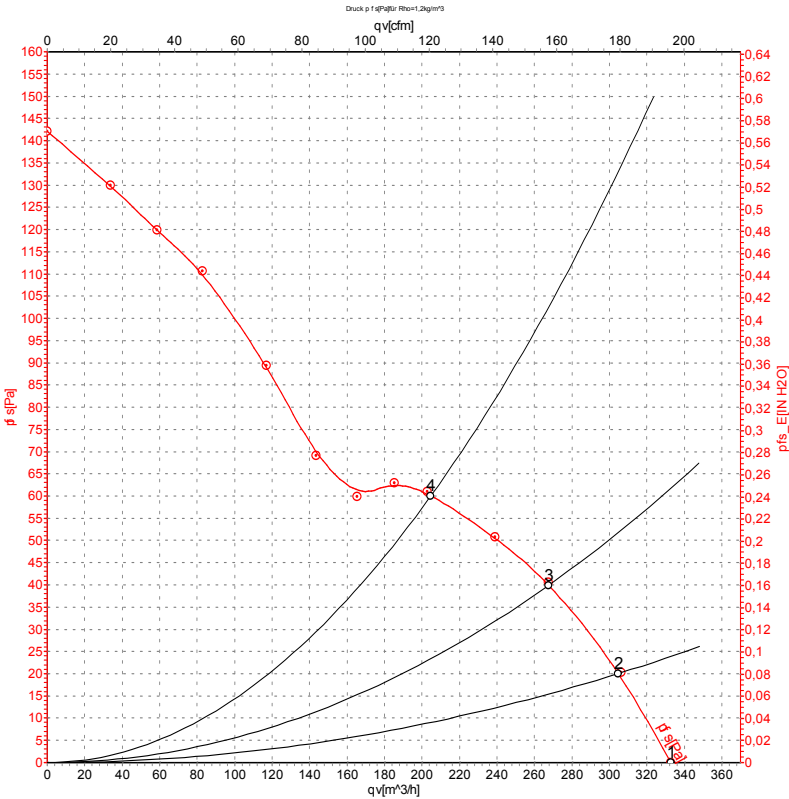

Measurement: LU-8537-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH ₂ O
1	24	50	2760	40	2.25	335	0	195	0.00
2	24	50	2790	41	2.47	305	20	180	0.08
3	24	50	2770	40	2.47	270	40	160	0.16
4	24	50	2750	42	2.47	205	60	120	0.24


U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



AC axial compact fan

sickle-shaped blades (S series), single-intake

Curves: Air performance 60 Hz

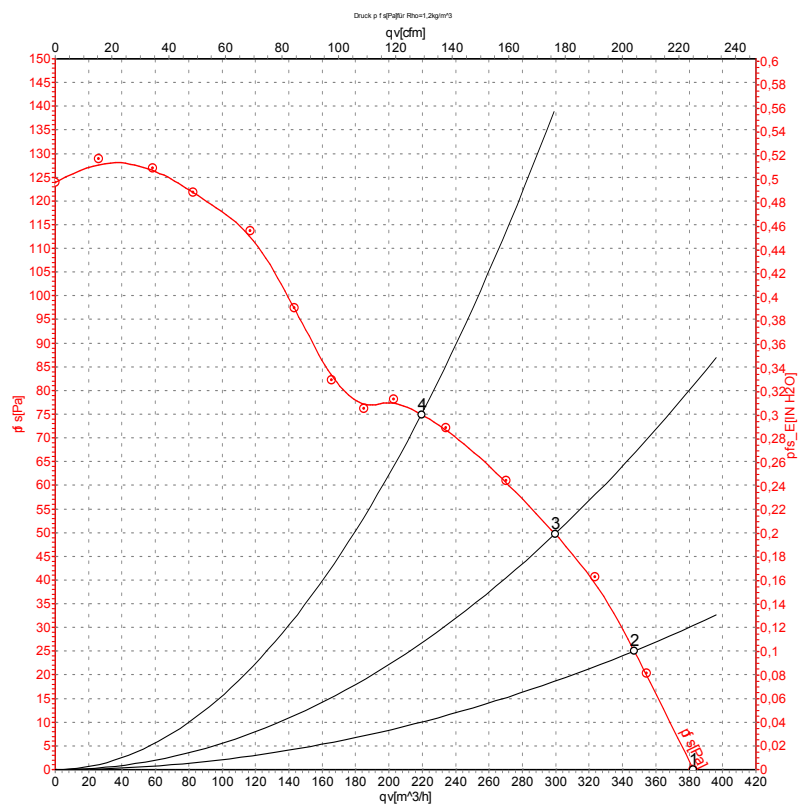

Measurement: LU-8540-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH2O
1	24	60	3200	40	2.20	380	0	225	0.00
2	24	60	3160	42	2.22	345	25	205	0.10
3	24	60	3100	43	2.28	300	50	175	0.20
4	24	60	3060	44	2.31	220	75	130	0.30

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

