

EC axial fan - HyBlade

sickle-shaped blades (S series)
with round full nozzle, for rail applications

W3G300-CT80-P1 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W3G300-CT80-P1	
Motor	M3G074-CF	

Nominal voltage	VDC	110
Nominal voltage range	VDC	77 .. 138
Frequency	Hz	DC

Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	2250
Power consumption	W	230
Current draw	A	2.0
Max. back pressure	Pa	160
Max. back pressure	in. wg	0.64
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	38.4	29.6	09 Power consumption P_e	kW	0.22
02 Measurement category		A		09 Air flow q_v	m ³ /h	1755
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	165
04 Efficiency grade N		48.8	40	10 Speed (rpm) n	min ⁻¹	2240
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$

LU-194612

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



EC axial fan - HyBlade

sickle-shaped blades (S series)
with round full nozzle, for rail applications

Technical description

Weight	4.04 kg
Size	300 mm
Motor size	74
Rotor surface	Galvanized
Electronics housing material	Die-cast aluminum, painted black
Blade material	Press-fitted sheet steel blank, sprayed with PP plastic
Support ring material	Stainless steel
Fan housing material	Sheet steel, galvanized and coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	A
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	Customer-specific
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H3
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Alarm relay - Run monitoring - Power limiter - Motor current limitation - RS-485 MODBUS-RTU - Soft start - EEPROM write cycles: 100,000 maximum - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics - Line undervoltage detection - Reverse polarity protection
EMC regulations	According to EN 50121-3-2
Motor protection	Electronic motor protection
With cable	Lateral
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 45545-2, HL3; EN 50155; EN 61373, Cat. 1B; CE
Approval	EAC



EC axial fan - HyBlade

sickle-shaped blades (S series)

with round full nozzle, for rail applications

Comment

If voltage (e.g. 230 VAC) is passed through the alarm relay, the SELV signal wires lose their property of reinforced insulation, meaning they then have only basic insulation. The SELV property (reinforced insulation) is not lost when voltages of up to 110 VDC are passed through the alarm relay.




EC axial fan - HyBlade

sickle-shaped blades (S series)

with round full nozzle, for rail applications

Product drawing

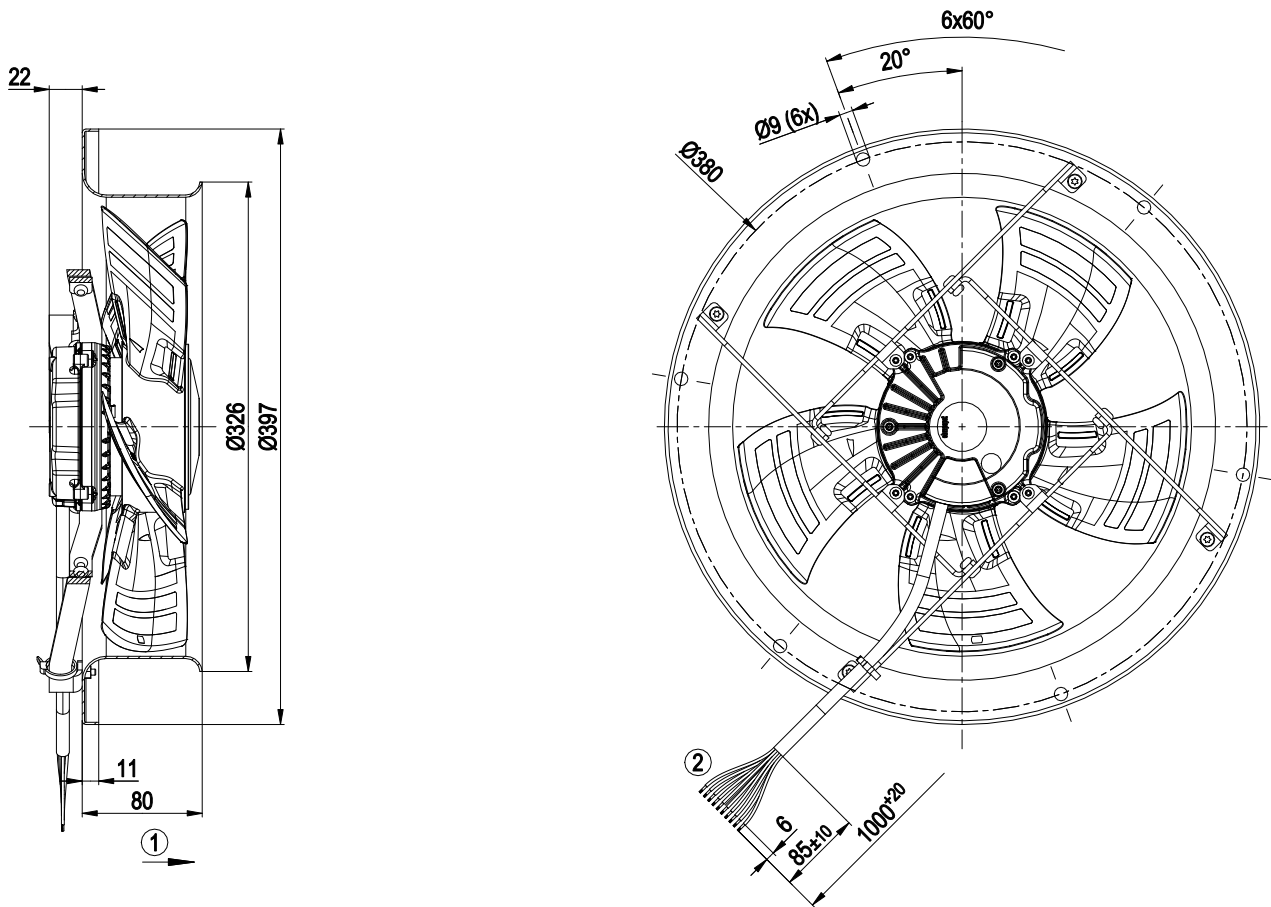


1	Direction of air flow "A"
2	Cable, halogen-free, railway application EN 45545, 10G 1.0 mm ²
	10x lead tip

EC axial fan - HyBlade

sickle-shaped blades (S series)

with round full nozzle, for rail applications

Connection diagram

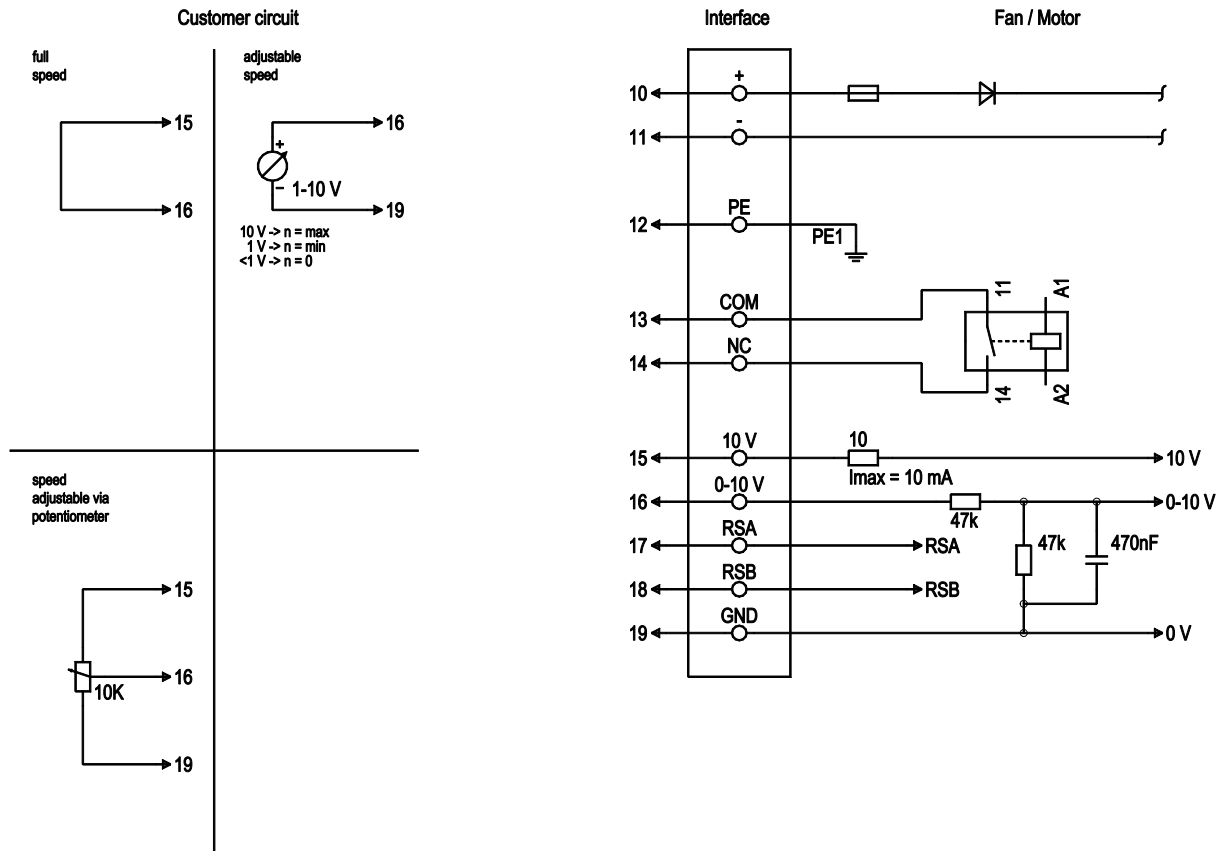

No.	Conn.	Designation	Color	Function/assignment
	10	+	brown	Power supply, see nameplate for voltage range
	11	-	black	Power supply, see nameplate for voltage range
	12	PE	green/yellow	Protective earth
	13	COM	gray	Status relay, floating status contact, common connection, contact rating 250 VAC/30 VDC max. 2 A (AC1), min. 1 mA/5 VDC, reinforced insulation on control interface side, basic insulation on supply side in accordance with EN 50124-1
	14	NO	purple	Status relay, floating status contact, normally open contact, contact rating 250 VAC/30 VDC max. 2 A (AC1), min. 1 mA/5 VDC, reinforced insulation on control interface side, basic insulation on supply side in accordance with EN 50124-1
	15	+10 V	red	Fixed voltage output 10 VDC, SELV, +10 V +/-3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. potentiometers)
	16	0-10 V	yellow	Analog input (set value) SELV, 0-10 V, Ri = 100 kΩ, adjustable curve
	17	RSA	white	RS-485 interface for MODBUS, RSA; SELV, bus termination resistor provided by customer
	18	RSB	orange	RS-485 interface for MODBUS, RSB; SELV, bus termination resistor provided by customer
	19	GND	blue	Reference ground for control interface, SELV




EC axial fan - HyBlade

sickle-shaped blades (S series)

with round full nozzle, for rail applications

Curves: Air performance

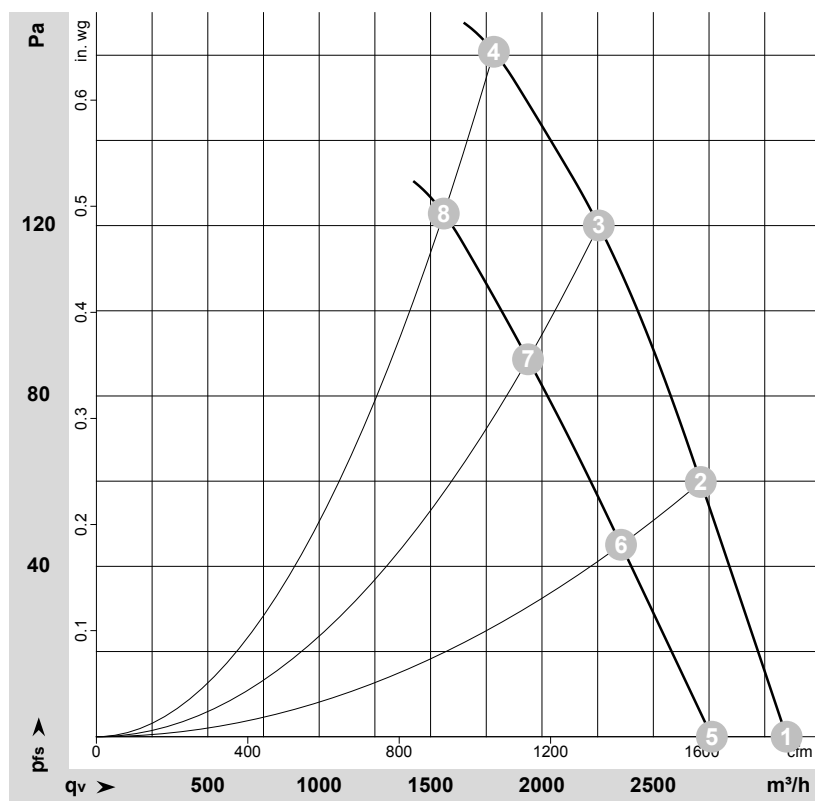

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-194612-1
Measurement: LU-194696-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	110-138	2350	165	1.50*	66	73	3100	0	1825	0.00
2	110-138	2350	202	1.80*	66	73	2715	60	1595	0.24
3	110-138	2325	230	2.00*	66	73	2255	120	1325	0.48
4	110-138	2250	230	2.00*	67	75	1785	160	1050	0.64
5	77	2100	118	1.53			2765	0	1625	0.00
6	77	2035	132	1.71			2355	45	1385	0.18
7	77	1990	141	1.83			1935	89	1140	0.36
8	77	1965	147	1.90			1560	124	920	0.50

U = Voltage · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · * = Current measured at nominal voltage · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

