

EC axial fan - AxiCool

sickle-shaped blades (S series), single-intake
Fan housing with guard grille

W3G350-JN01-33 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W3G350-JN01-33	
Motor	M3G074-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1475
Power consumption	W	165
Current draw	A	1.35
Max. back pressure	Pa	85
Max. back pressure	in. wg	0.34
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	38.4	28.7
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		49.7	40
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.16
09 Air flow q_v	m³/h	2095
09 Pressure increase p_{fs}	Pa	95
10 Speed (rpm) n	min ⁻¹	1490
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-197649



Technical description


Weight	4 kg
Size	350 mm
Motor size	74
Rotor surface	Thick-film passivated
Blade material	Press-fitted sheet steel blank, sprayed with PP plastic
Fan housing material	PP plastic
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	A
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 70 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Cooling hole/opening	On rotor side
Mode	S1
Motor bearing	Ball bearing with low-temperature lubricant
Speed levels	2
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	≤ 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE

EC axial fan - AxiCool

sickle-shaped blades (S series), single-intake

Fan housing with guard grille

Product drawing

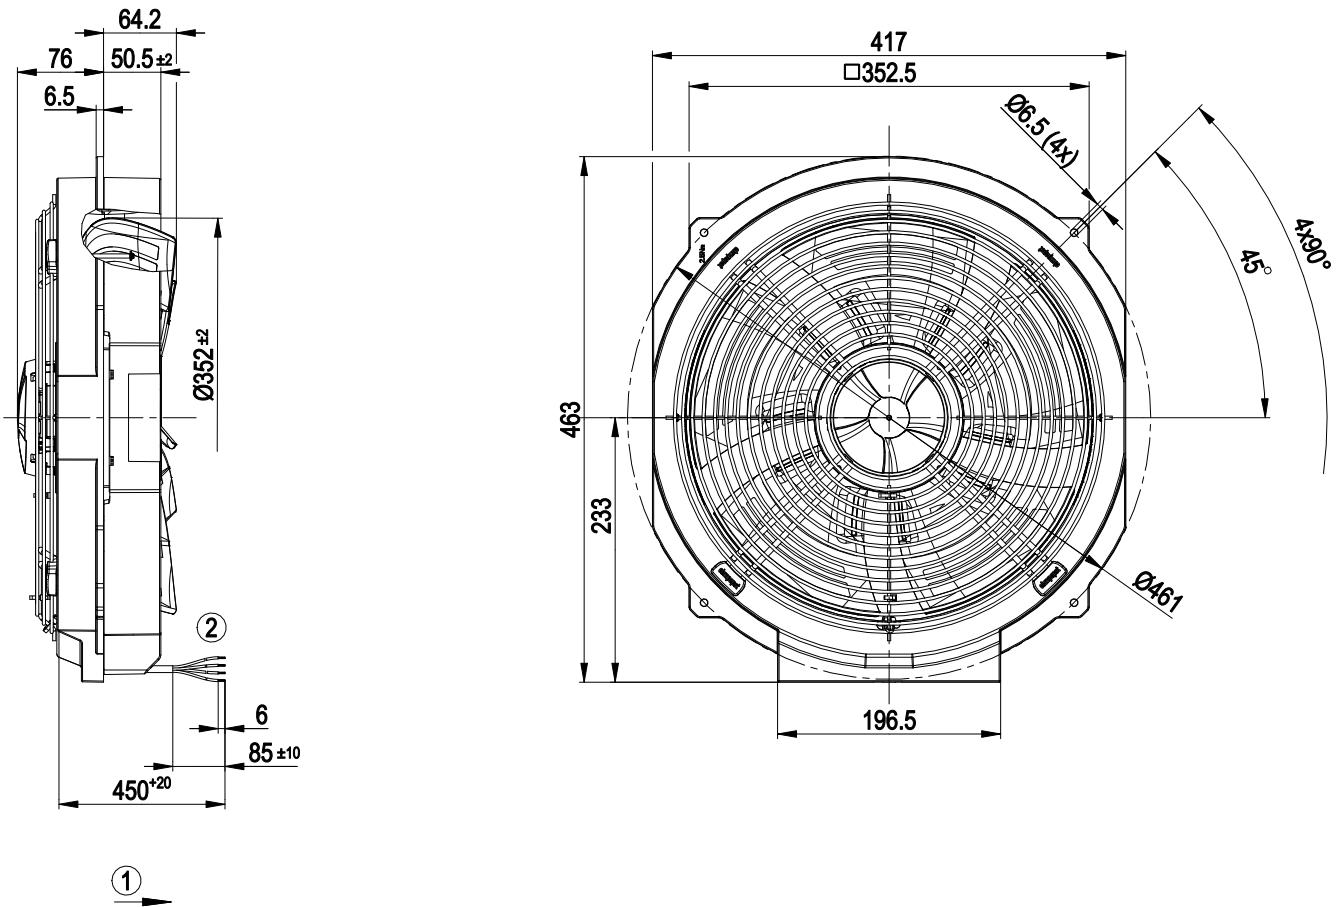

1	Direction of air flow "A"
2	Cable PVC 4G 0.5 mm²
	4x splice




EC axial fan - AxiCool

sickle-shaped blades (S series), single-intake

Fan housing with guard grille


Mounting dimensions

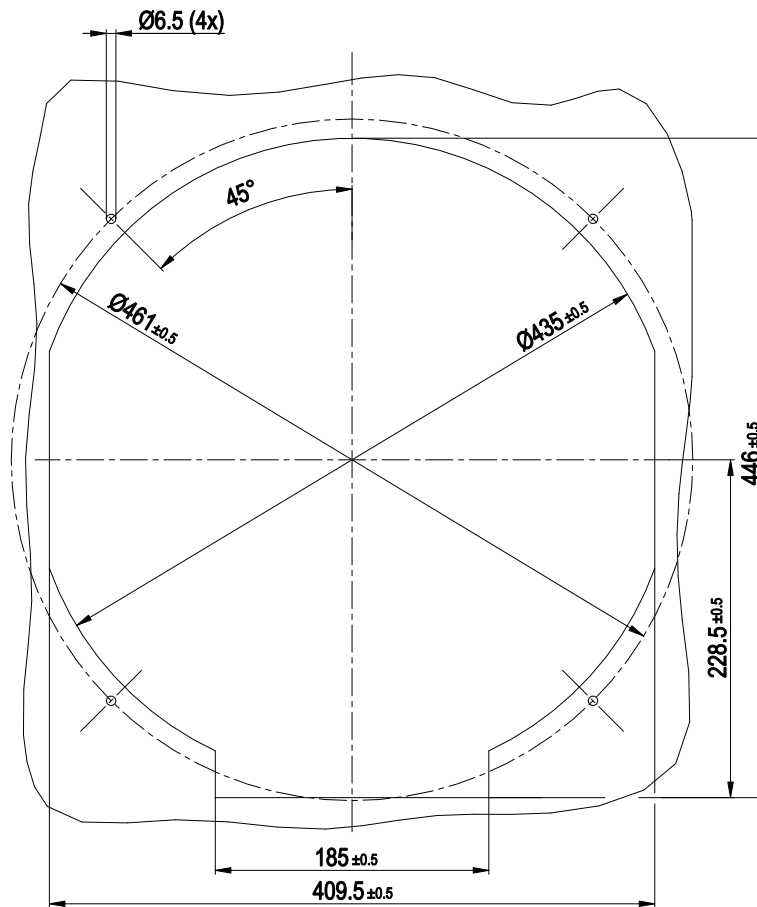

EC axial fan - AxiCool

sickle-shaped blades (S series), single-intake
Fan housing with guard grille

Connection diagram

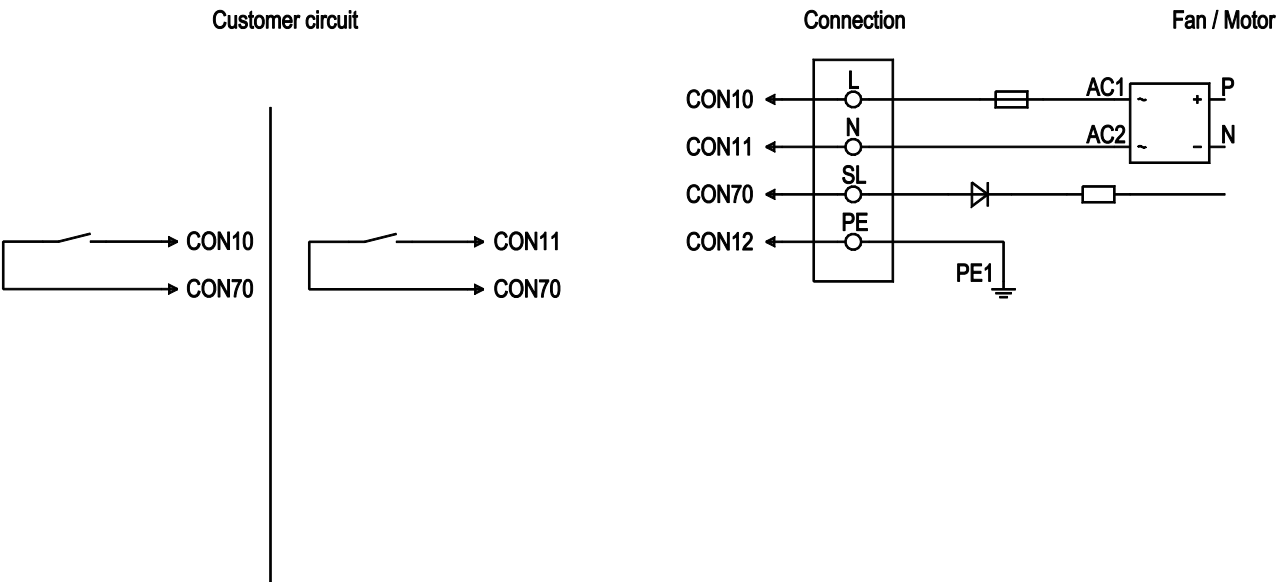

No.	Conn.	Designation	Color	Function/assignment
	CON 10	L	black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
	CON 11	N	blue	Neutral conductor
	CON 12	PE	green/yellow	Protective earth
	CON 70	SL	brown	Speed selection: switch open speed 1; switch closed speed 2




EC axial fan - AxiCool

sickle-shaped blades (S series), single-intake

Fan housing with guard grille

Curves: Air performance 50 Hz

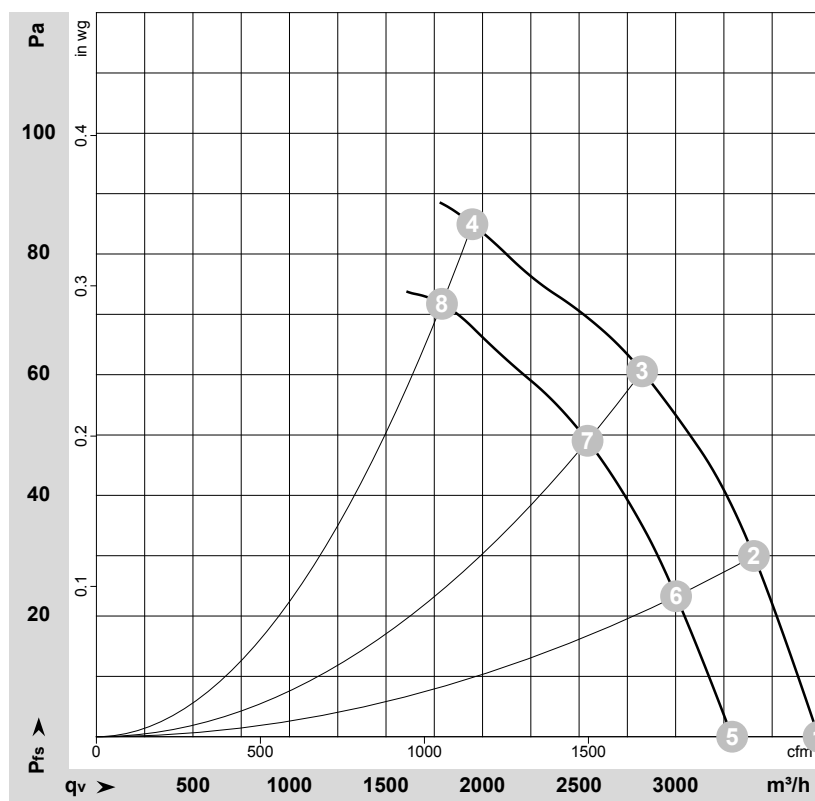

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-147503-1
Measurement: LU-147507-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	230	50	1620	152	1.26	64	71	3740	0	2200	0.00
2	230	50	1600	165	1.35	63	70	3405	30	2005	0.12
3	230	50	1545	165	1.35	61	68	2825	60	1665	0.24
4	230	50	1475	165	1.35	61	68	1945	85	1145	0.34
5	230	50	1430	105	0.93			3295	0	1940	0.00
6	230	50	1410	113	1.00			3000	25	1765	0.10
7	230	50	1385	121	1.04			2545	49	1495	0.20
8	230	50	1365	130	1.14			1790	73	1055	0.29

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

