

EC axial fan

sickle-shaped blades (S series)
Fan housing with mounting grille



W3G385-BV44-10 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W3G385-BV44-10	
Motor	M3G084-BF	
Nominal voltage	VDC	26
Nominal voltage range	VDC	16 .. 32
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	2600
Power consumption	W	250
Current draw	A	9.6
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	95
-with power derating to	°C	110
Starting current	A	12

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	44.9	30.1
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		54.8	40
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_e	kW	0.27
09 Air flow q_v	m ³ /h	2110
09 Pressure increase p_{fs}	Pa	186
10 Speed (rpm) n	min ⁻¹	2340
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-141094



Technical description


Weight	2.7 kg
Size	385 mm
Motor size	84
Rotor surface	Cast in PA plastic
Blade material	PA plastic
Fan housing material	PA plastic UL94 V0
Number of blades	7
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	Motor IP24 KM
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H4
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Tach output - Power limiter - Load dump (58 V) - Motor current limitation - Control input 0-10 VDC / PWM - Temperature derating - Overvoltage detection - Thermal overload protection for electronics - Line undervoltage detection - Reverse polarity protection
Motor protection	Reverse polarity and locked-rotor protection
With cable	Lateral

EC axial fan

sickle-shaped blades (S series)

Fan housing with mounting grille

Product drawing

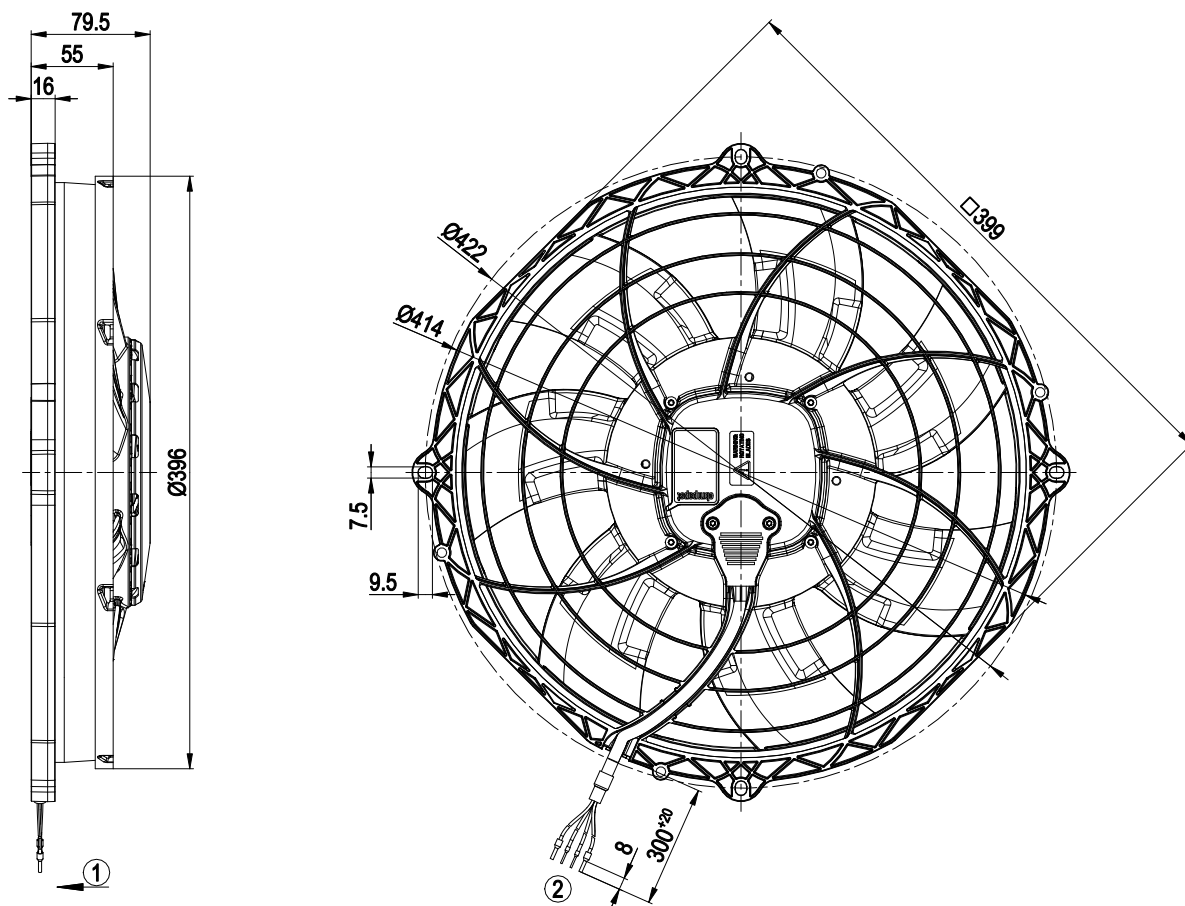


1	Airflow direction "V"
2	Cable PFA AWG16 (black, brown), AWG18 (yellow, white)
	4x wire-end ferrule

EC axial fan

sickle-shaped blades (S series)
Fan housing with mounting grille

Connection diagram

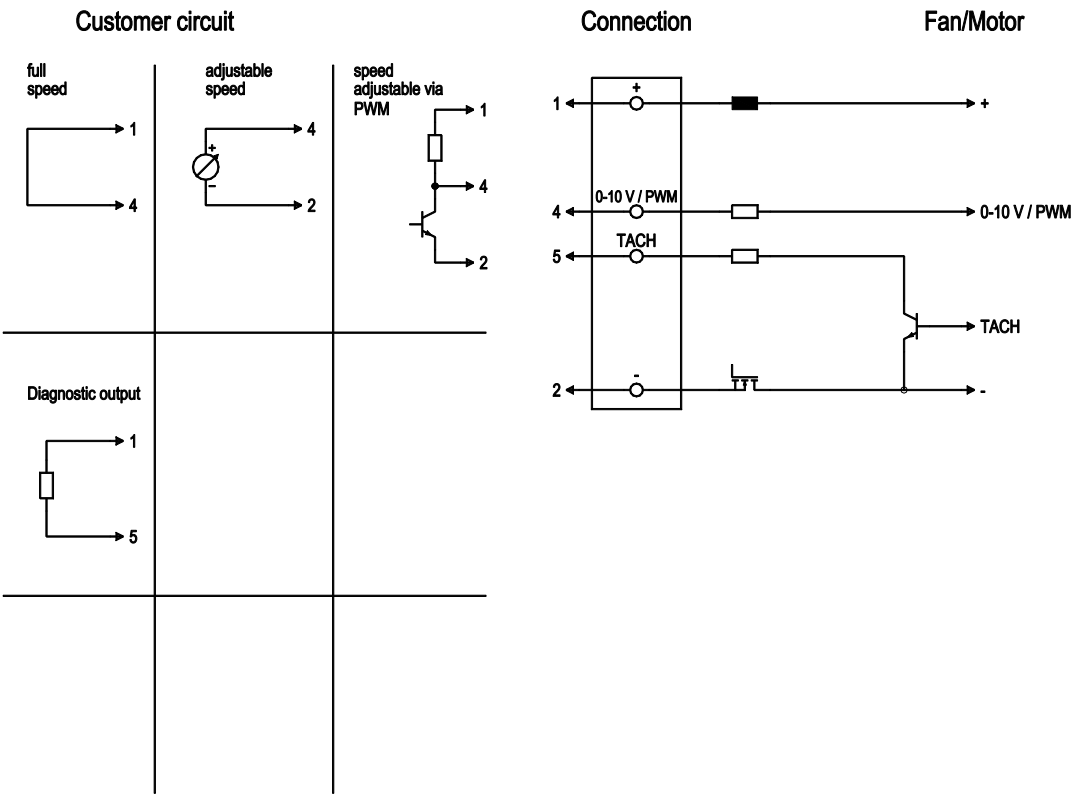


No.	Conn.	Designation	Color	Function/assignment
1		+	black	Power supply +
2		-	brown	Power supply -
4		0-10 V / PWM	yellow	Control input: Ri > 36 kΩ 0-10 V (typ. <1 V ->n = 0; 1.5 V ->n = min.; >9.5 V ->n = max.) or PWM (>10 V; 10 Hz - 50 kHz; typ. < 10% -> n = 0; 15% -> n = min.; > 100% -> n = max.)
5		Tacho	white	Tach output: open collector, 1 pulse per revolution, Isink max = 10 mA, Ri = 470 Ω



EC axial fan
sickle-shaped blades (S series)
Fan housing with mounting grille

Curves: Air performance

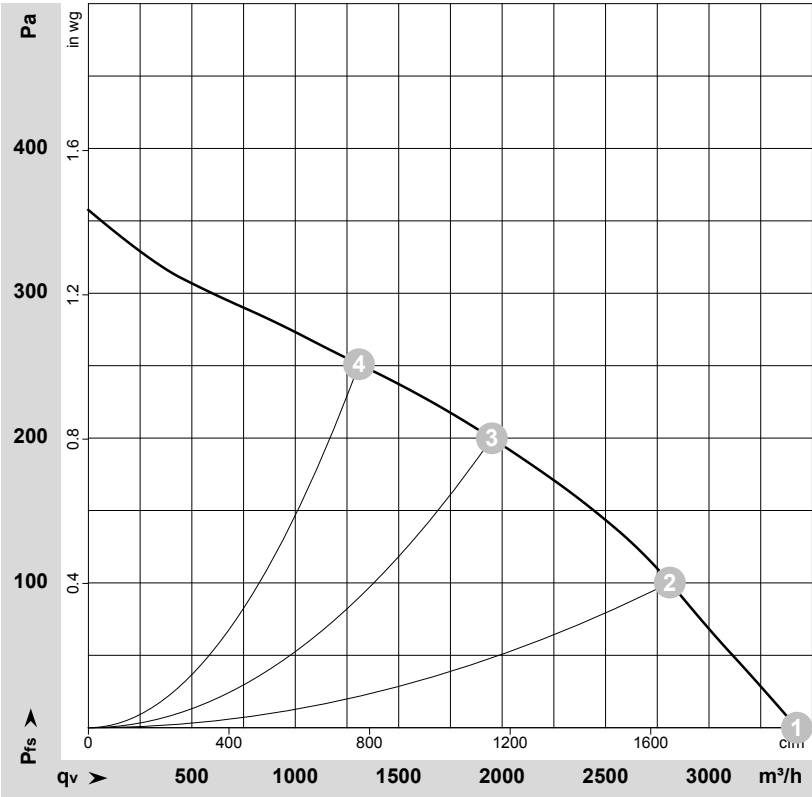

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-141094-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	26	2600	250	9.60	76	84	3425	0	2015	0.00
2	26	2495	273	10.47	74	83	2810	100	1655	0.40
3	26	2315	273	10.50	73	81	1950	200	1150	0.80
4	26	2215	274	10.54	74	82	1310	250	770	1.00

U = Voltage · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side · q_v = Air flow
p_{fs} = Pressure increase

