

# EC axial fan - HyBlade

sickled blades (S series)  
with full square nozzle

W3G560-DQ41-05 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | W3G560-DQ41-05    |            |
| Motor                    | M3G112-GA         |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 400        |
| Nominal voltage range    | VAC               | 380 .. 480 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 1350       |
| Power input              | W                 | 945        |
| Current draw             | A                 | 1.5        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

|                                   |   | Actual | Request 2015 |
|-----------------------------------|---|--------|--------------|
| 01 Overall efficiency $\eta_{es}$ | % | 42.9   | 33.5         |
| 02 Measurement category           |   | A      |              |
| 03 Efficiency category            |   | Static |              |
| 04 Efficiency grade N             |   | 49.4   | 40           |
| 05 Variable speed drive           |   | Yes    |              |

Data definition with optimum efficiency.  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

|                               |                   |      |
|-------------------------------|-------------------|------|
| 09 Power input $P_{ed}$       | kW                | 0.93 |
| 09 Air flow $q_v$             | m³/h              | 7890 |
| 09 Pressure increase $p_{fs}$ | Pa                | 168  |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 1360 |
| 11 Specific ratio*            |                   | 1.00 |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-116554



# EC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

## Technical features


|                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mass                                                               | 21.8 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Size                                                               | 560 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Surface of rotor                                                   | Coated in black                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Material of electronics housing                                    | Die-cast aluminium, coated in black                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Material of blades                                                 | Aluminium sheet insert, sprayed with PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Material of wall ring                                              | Sheet steel, galvanised and coated in black plastic (RAL 9005)                                                                                                                                                                                                                                                                                                                                                                                                      |
| Material of guard grille                                           | Steel, coated in black plastic (RAL9005)                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Number of blades                                                   | 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Blade angle                                                        | -5°                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Direction of air flow                                              | "A"                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Direction of rotation                                              | Clockwise, seen on rotor                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Type of protection                                                 | IP 54                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Insulation class                                                   | "B"                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Humidity (F)/environmental protection class (H)                    | F4-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Max. permissible ambient motor temp. (transp./ storage)            | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Min. permissible ambient motor temp. (transp./storage)             | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Mounting position                                                  | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                                        |
| Condensate discharge holes                                         | Rotor-side                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Operation mode                                                     | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Motor bearing                                                      | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Technical features                                                 | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Motor current limit</li> <li>- PFC, passive</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC interference immunity                                          | Acc. to EN 61000-6-2                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| EMC harmonics                                                      | Acc. to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| EMC interference emission                                          | Acc. to EN 61000-6-3                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Motor protection                                                   | Thermal overload protector (TOP) wired internally                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Cable exit                                                         | Variable                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Protection class                                                   | I (if protective earth is connected by customer)                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Product conforming to standard                                     | EN 61800-5-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                                    |



# EC axial fan - HyBlade

sickled blades (S series)  
with full square nozzle

## Product drawing

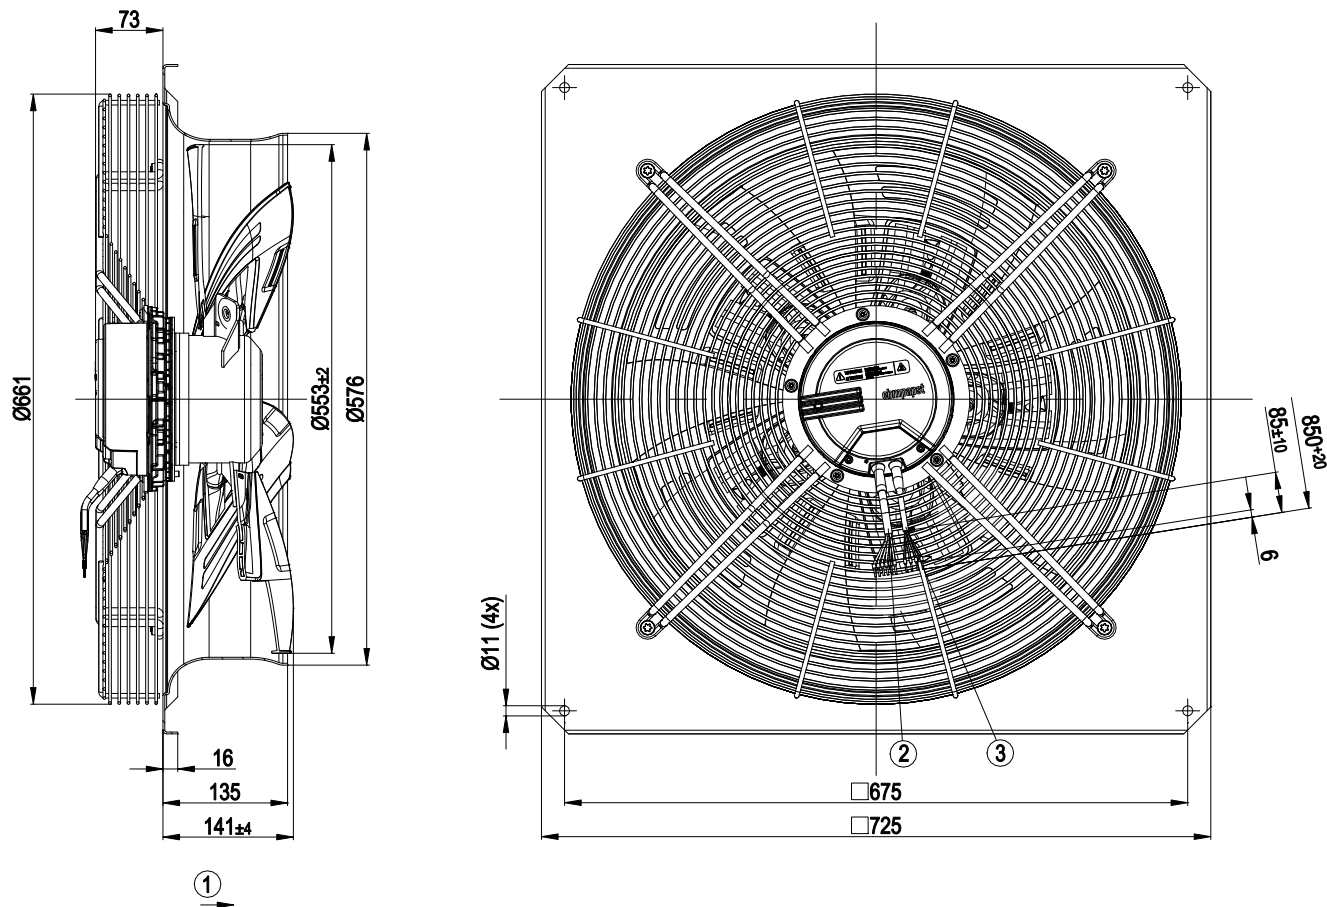

|   |                                                     |
|---|-----------------------------------------------------|
| 1 | Direction of air flow "A"                           |
| 2 | Connection line AWG18, 6 x crimped core-end sleeves |
| 3 | Connection line AWG22, 3 x crimped core-end sleeves |




# EC axial fan - HyBlade

sickled blades (S series)


with full square nozzle

## Connection screen

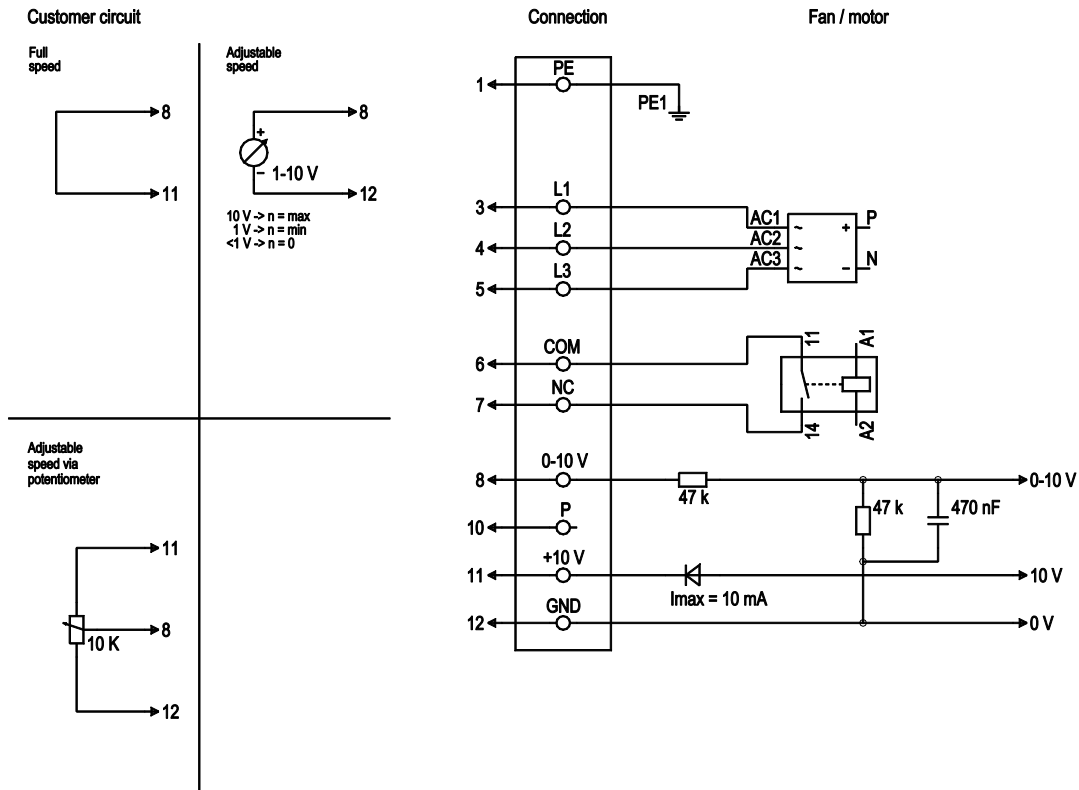

| No. | Conn. | Designation | Colour       | Function / assignment                                                                                     |
|-----|-------|-------------|--------------|-----------------------------------------------------------------------------------------------------------|
| 1   | 1     | PE          | green/yellow | Ground wire                                                                                               |
| 1   | 3     | L1          | black        | Supply voltage, 50/60 Hz                                                                                  |
| 1   | 4     | L2          | black        | Supply voltage, 50/60 Hz                                                                                  |
| 1   | 5     | L3          | black        | Supply voltage, 50/60 Hz                                                                                  |
| 1   | 6     | COM         | white 1      | Floating status message contact, normally closed connection (2 A, max. 250 VAC, min. 10 mA, AC1)          |
| 1   | 7     | NC          | white 2      | Floating status message contact, normally closed connection                                               |
| 2   | 8     | 0-10 V      | yellow       | Control input, set value 0-10 VDC, impedance 100 k $\Omega$ , SELV                                        |
| 2   | 10    | P           | orange       | Do not use                                                                                                |
| 2   | 11    | +10 V       | red          | Voltage output 10 VDC (+/-3%), max. 10 mA, supply voltage for external devices (e.g. potentiometer), SELV |
| 2   | 12    | GND         | blue         | Reference mass for control interface, SELV                                                                |

## Charts: Air flow 50 Hz

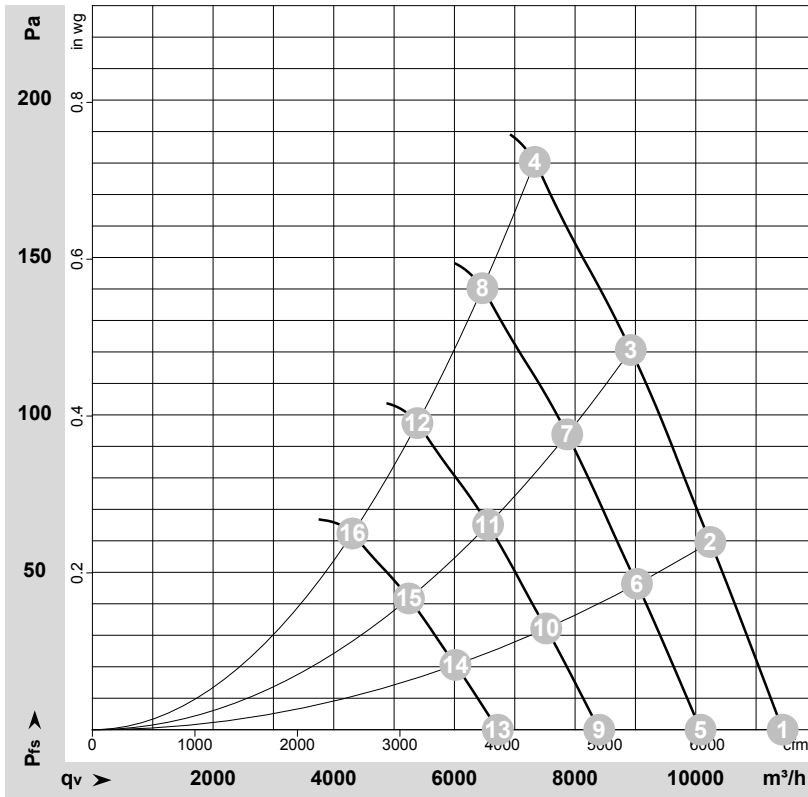

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-119233-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub>    |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|----------------|--------------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | dB(A)              | m <sup>3</sup> /h | Pa              | cfm            | inH <sub>2</sub> O |
| 1  | 400 | 50 | 1350              | 673             | 1.11 | 68                | 75                | 75                 | 11440             | 0               | 6735           | 0.00               |
| 2  | 400 | 50 | 1350              | 784             | 1.26 | 67                | 74                | 74                 | 10240             | 60              | 6030           | 0.24               |
| 3  | 400 | 50 | 1350              | 869             | 1.38 | 68                | 74                | 74                 | 8925              | 120             | 5250           | 0.48               |
| 4  | 400 | 50 | 1350              | 945             | 1.50 | 70                | 77                | 76                 | 7330              | 180             | 4315           | 0.72               |
| 5  | 400 | 50 | 1200              | 460             | 0.76 | 65                | 71                | 72                 | 10080             | 0               | 5935           | 0.00               |
| 6  | 400 | 50 | 1200              | 537             | 0.86 | 64                | 71                | 70                 | 9025              | 46              | 5315           | 0.18               |
| 7  | 400 | 50 | 1200              | 596             | 0.95 | 65                | 71                | 70                 | 7870              | 94              | 4630           | 0.38               |
| 8  | 400 | 50 | 1200              | 648             | 1.02 | 67                | 74                | 73                 | 6465              | 141             | 3805           | 0.57               |
| 9  | 400 | 50 | 1000              | 266             | 0.44 | 60                | 67                | 67                 | 8400              | 0               | 4945           | 0.00               |
| 10 | 400 | 50 | 1000              | 311             | 0.50 | 59                | 66                | 66                 | 7520              | 32              | 4425           | 0.13               |
| 11 | 400 | 50 | 1000              | 345             | 0.55 | 60                | 66                | 66                 | 6560              | 65              | 3860           | 0.26               |
| 12 | 400 | 50 | 1000              | 375             | 0.59 | 62                | 69                | 69                 | 5385              | 98              | 3170           | 0.39               |
| 13 | 400 | 50 | 800               | 136             | 0.23 | 54                | 61                | 61                 | 6720              | 0               | 3955           | 0.00               |
| 14 | 400 | 50 | 800               | 159             | 0.26 | 54                | 60                | 60                 | 6015              | 21              | 3540           | 0.08               |
| 15 | 400 | 50 | 800               | 177             | 0.28 | 54                | 61                | 60                 | 5245              | 42              | 3090           | 0.17               |
| 16 | 400 | 50 | 800               | 192             | 0.30 | 57                | 64                | 63                 | 4310              | 63              | 2535           | 0.25               |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · LwA<sub>out</sub> = Sound power level outlet side  
q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

