

W3G910-KS35-05

Johnson Controls

EC axial fan - AxiBlade

sickled blades (S series)

with full square nozzle

W3G910-KS35-05 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W3G910-KS35-05	
Motor	M3G150-FF	

Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60

Type of data definition		ml
Speed (rpm)	min ⁻¹	850
Power input	W	1770
Current draw	A	2.8
Max. back pressure	Pa	170
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Occasional start-up between -40 °C and -25 °C is permissible. For continuous operation at ambient temperatures below -25 °C (such as refrigeration applications), a fan design with special low-temperature bearings must be used.

Data in accordance with ecodesign regulation EU 327/2011 (EN 17166)

		Actual	Request 2015
01 Overall efficiency η_{es}	%	50.5	34.9
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		55.6	40
05 Variable speed drive		Yes	

09 Power input P_{ed}	kW	1.58
09 Air flow q_v	m³/h	20860
09 Pressure increase p_{fs}	Pa	129
10 Speed (rpm) n	min ⁻¹	850
11 Specific ratio*		1.00

Data definition with optimum efficiency.

The indicated efficiency values for obtaining conformity with the Ecodesign Directive EU 327/2011 were achieved with defined air conduction components (e.g. inlet nozzles).
The dimensions are to be requested from ebm-papst. If other air guide geometries are used on the installation side, the ebm-papst evaluation loses its validity/conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2(2a) (motors completely integrated into a product).

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-184136



W3G910-KS35-05

Johnson Controls

EC axial fan - AxiBlade

sickled blades (S series)

with full square nozzle

Technical features

Mass	44.2 kg
Size	910 mm
Motor size	150
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium, painted grey
Material of impeller	PP plastic
Material of wall ring	Sheet steel, galvanised and coated in black plastic (RAL 9005)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade angle	0°
Direction of air flow	V
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP55
Insulation class	"F"
Humidity (F) / environmental protection class (H)	H2
Note ambient temperature	Occasional start-up between -40 °C and -25 °C is permissible. For continuous operation at ambient temperatures below -25 °C (e.g. refrigeration applications), a fan version with special low-temperature bearings must be used.
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display via LED - External 15-50 VDC input (parametrisation) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.3 - Motor current limit - RS485 MODBUS RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC interference emission	Acc. to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used devices with a total rated power greater than 1 kW
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical connection	Terminal box
Motor protection	Reverse polarity and locked-rotor protection
Protection class	I (if protective earth is connected by customer)



W3G910-KS35-05

Johnson Controls

EC axial fan - AxiBlade

sickled blades (S series)

with full square nozzle

Product conforming to standard	EN 61800-5-1; CE
Approval	UL 1004-7 + 60730-1; CSA C22.2 no. 77 + CAN/CSA-E60730-1; EAC




EC axial fan - AxiBlade

sickled blades (S series)

with full square nozzle

Product drawing

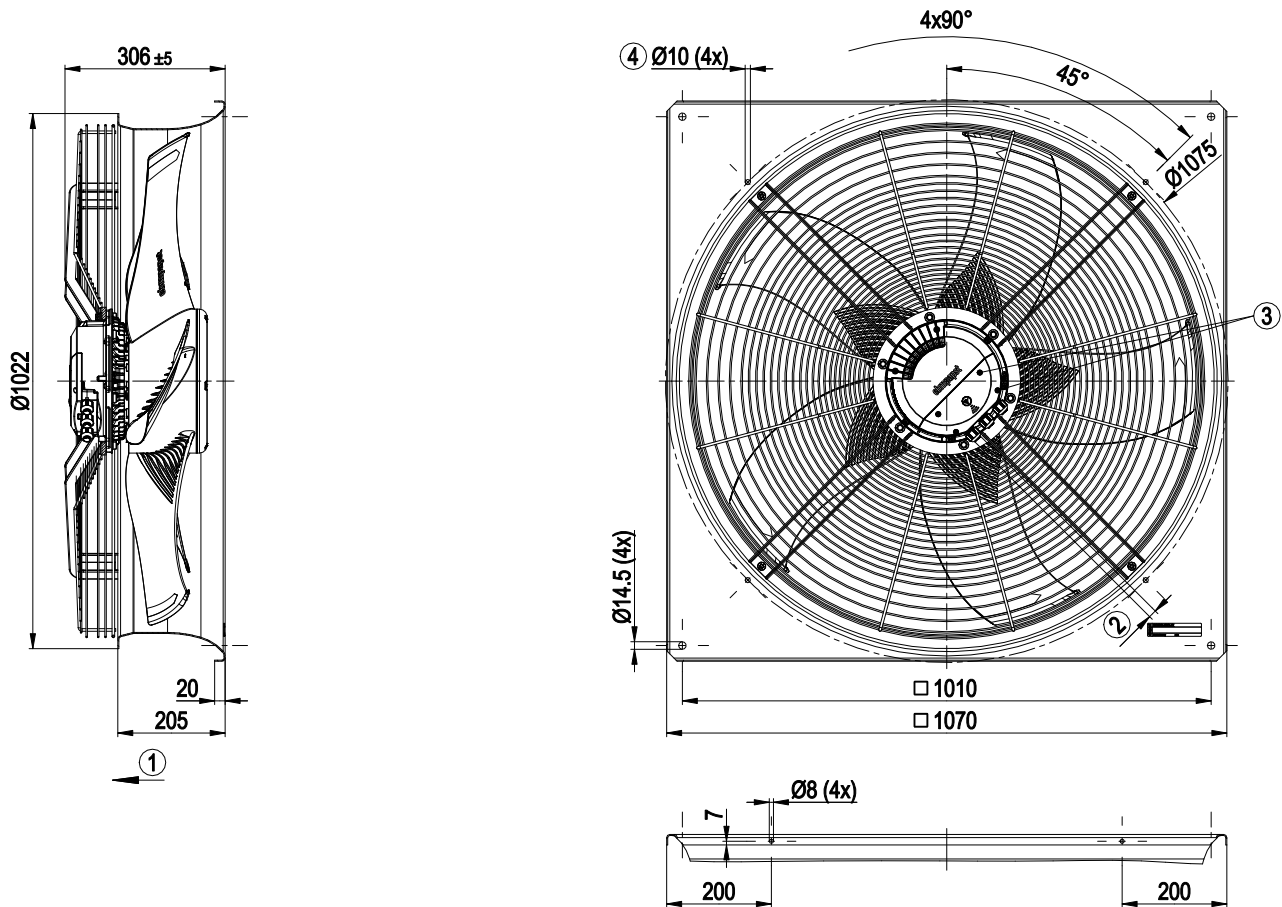


1	Direction of air flow "V"
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may need to be adapted)
3	Tightening torque 1.5 ± 0.2 Nm
4	Attachment holes for FlowGrid (91000-2-2957 not included in scope of delivery)

EC axial fan - AxiBlade

sickled blades (S series)

with full square nozzle

Connection screen

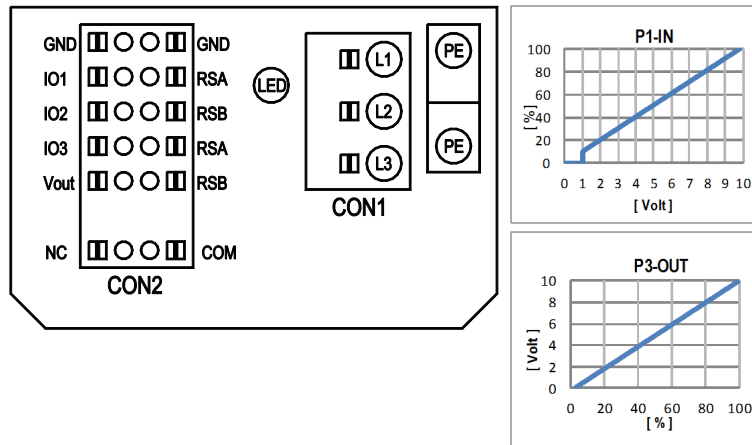

No.	Conn.	Designation	Function / assignment
	CON1	L1, L2, L3	Power supply, phase, see type plate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS-485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS-485 interface for MODBUS, RSB; SELV
	CON2	GND	Signal ground for control interface, SELV
	CON2	IO1	Function parametrisable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: fault reset triggered by status change from enabled to disabled
	CON2	IO2	Function parametrisable (see "Optional interface functions" table) Factory setting: Analogue input 0-10 V / PWM, Ri=100 kΩ, function: Set value Curve parametrisable (see input curve P1-IN), SELV
	CON2	IO3	Function parametrisable (see "Optional interface functions" table) Factory setting: Analogue output 0-10 V, max. 5 mA, function: Fan modulation level Curve parametrizable (see output curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC +/-5%, Pmax=800 mW, voltage parametrisable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parametrisation via MODBUS without mains power
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC/max. 2 A (AC1) min. 10 mA, reinforced insulation with respect to mains and control interface
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green = OK status, ready for operation orange = Warning status red = Error status
		P1-IN	Input curve
		P3-OUT	Output curve

Terminal/pin assignment


configurable IO functions: normal / inverse		MODBUS Register for IO mode configuration	electrical specification	configurable IO mode		CON2															
				Din1 (active high): digital input																	
IO1	○ Ain1 0-10V/PWM: analog input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC	D158 [0]	○	○	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	signal: fan modulation level %	signal: actual speed	signal: system modulation level %	signal: remote control output 0-10V	pulse input for auto-addressing	D130 [4]								
	○ Tach out (open collector output)	RI = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10kHz, SELV U _{max} = 50VDC, I _{max} = 20mA, SELV	D158 [2]	○	○								D130 [5]								
	○ Diagnostics out (open collector output)	U _{max} = 50VDC, I _{max} = 20mA, SELV	D158 [5]										D130 [2]								
				D158 [6]									D130 [1]								
IO2	○ Din2 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC	D159 [0]	○	○	switch: tach out (selected directly via IO mode)	switch: fan enable / disable	switch: fan modulation level %	switch: actual speed	switch: system modulation level %	switch: remote control output 0-10V	pulse output for auto-addressing	D130 [4]								
	○ Ain2 0-10V/PWM: analog input	RI = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10kHz, SELV	D159 [2]	○	○								D130 [5]								
	○ Ain2 4-20mA: analog input	RI = 125R, characteristic curve parameterizable, SELV	D159 [3]	○	○								D130 [2]								
													D130 [1]								
IO3	○ Din3 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC	D15A [0]	○	○	switch: tach out (selected directly via IO mode)	switch: fan enable / disable	switch: fan modulation level %	switch: actual speed	switch: system modulation level %	switch: remote control output 0-10V	pulse output for auto-addressing	D130 [4]								
	○ Din3 (active low): digital input	active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC	D15A [1]	○	○								D130 [5]								
	○ PWMMin3: digital input, idle level high	PWM = 40Hz - 10kHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1,5VDC, SELV	D15A [7]	○	○								D130 [2]								
	○ PWMMin3: digital input, idle level low	40Hz - 10kHz, characteristics parameterizable active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV	D15A [8]	○	○								D130 [1]								
RSA RSB	○ Aout3 0-10V: analog output	function parameterizable, max. 5mA max output frequency 300Hz, SELV	D15A [4]			switch: tach out (selected directly via IO mode)	switch: fan enable / disable	switch: fan modulation level %	switch: actual speed	switch: system modulation level %	switch: remote control output 0-10V	pulse output for auto-addressing	D130 [4]								
	○ Tacho out (pulses), analog output	0-10V/max. 5mA max output frequency 300Hz, SELV	D15A [5]										D130 [5]								
	○ Diagnostics out (pulses)	0-10V/max. 5mA max output frequency 300Hz, SELV	D15A [6]										D130 [2]								
													D130 [1]								
Vout	RS485 bus connection,	MODBUS RTU, specification V6.3, SELV		○	○	source: set value	source: sensor value	switch: parameter set: #1 / #2	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	switch: set value source	switch: fan enable / disable	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	signal: fan modulation level %	signal: actual speed	signal: system modulation level %	signal: remote control output 0-10V	pulse input for auto-addressing	D130 [4]	
	voltage output	voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV	D16E [...]																		
	alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage	15...50VDC																			

○ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3



Charts: Air flow 50 Hz

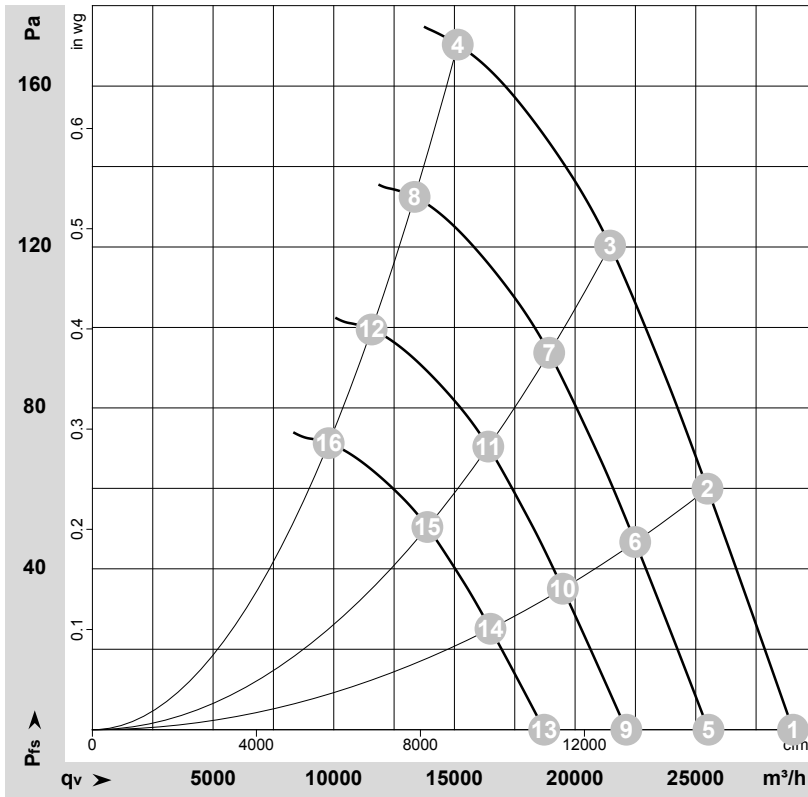

$$\rho = 1.174 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-184136-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	400	50	850	1049	1.77	68	75	76	29030	0	17085	0.00
2	400	50	850	1293	2.12	66	73	74	25485	60	15000	0.24
3	400	50	850	1544	2.48	69	75	75	21450	120	12625	0.48
4	400	50	850	1770	2.80	80	88	89	15140	170	8910	0.68
5	400	50	750	713	1.20	65	72	73	25530	0	15025	0.00
6	400	50	750	891	1.46	63	70	71	22490	48	13240	0.19
7	400	50	750	1060	1.70	66	72	72	18925	94	11140	0.38
8	400	50	750	1193	1.89	77	85	86	13350	133	7860	0.53
9	400	50	650	464	0.78	61	69	69	22125	0	13020	0.00
10	400	50	650	580	0.95	59	66	67	19495	36	11475	0.14
11	400	50	650	690	1.11	62	69	69	16405	70	9655	0.28
12	400	50	650	777	1.23	73	81	82	11570	100	6810	0.40
13	400	50	550	281	0.48	57	64	65	18720	0	11020	0.00
14	400	50	550	352	0.58	55	62	63	16495	26	9710	0.10
15	400	50	550	418	0.67	58	64	64	13880	50	8170	0.20
16	400	50	550	471	0.74	69	77	78	9790	71	5760	0.29

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · LwA_{out} = Sound power level outlet side
q_v = Air flow · P_{fs} = Pressure increase