

AC axial fan

sickled blades (S series)

with full round nozzle

W4D450-CP01-02 ebmpapst Datasheet

sales@fansco.com

www.fansco.com



Nominal data

Type	W4D450-CP01-02				
Motor	M4D074-GA				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	230	400	400
Connection		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Type of data definition		fa	fa	fa	fa
Valid for approval / standard		CE	CE	CE	CE
Speed	min ⁻¹	1380	1540	1380	1540
Power input	W	200	285	200	285
Current draw	A	0.83	0.92	0.48	0.53
Max. back pressure	Pa	120	70	120	70
Max. ambient temperature	°C	50	50	50	50

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio*	1.00

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}		34.9	26.1	30.1
Efficiency grade N		44.8	36	40
Power input P_e	kW	0.27		
Air flow q_v	m ³ /h	3795		
Pressure increase p_{fs}	Pa	91		
Speed n	min ⁻¹	1310		

Data established at point of optimum efficiency



AC axial fan

sickled blades (S series)

with full round nozzle

Technical features


Mass	9.7 kg
Size	450 mm
Surface of rotor	Coated in black
Material of blades	Sheet steel, coated in black
Material of wall ring	Sheet steel, pre-galvanised and coated in black plastic
Material of guard grille	Steel, phosphated and coated in black plastic
Number of blades	5
Direction of air flow	"A"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44
Insulation class	"F"
Humidity class	F1-2
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)



AC axial fan

sickled blades (S series)
with full round nozzle

Product drawing

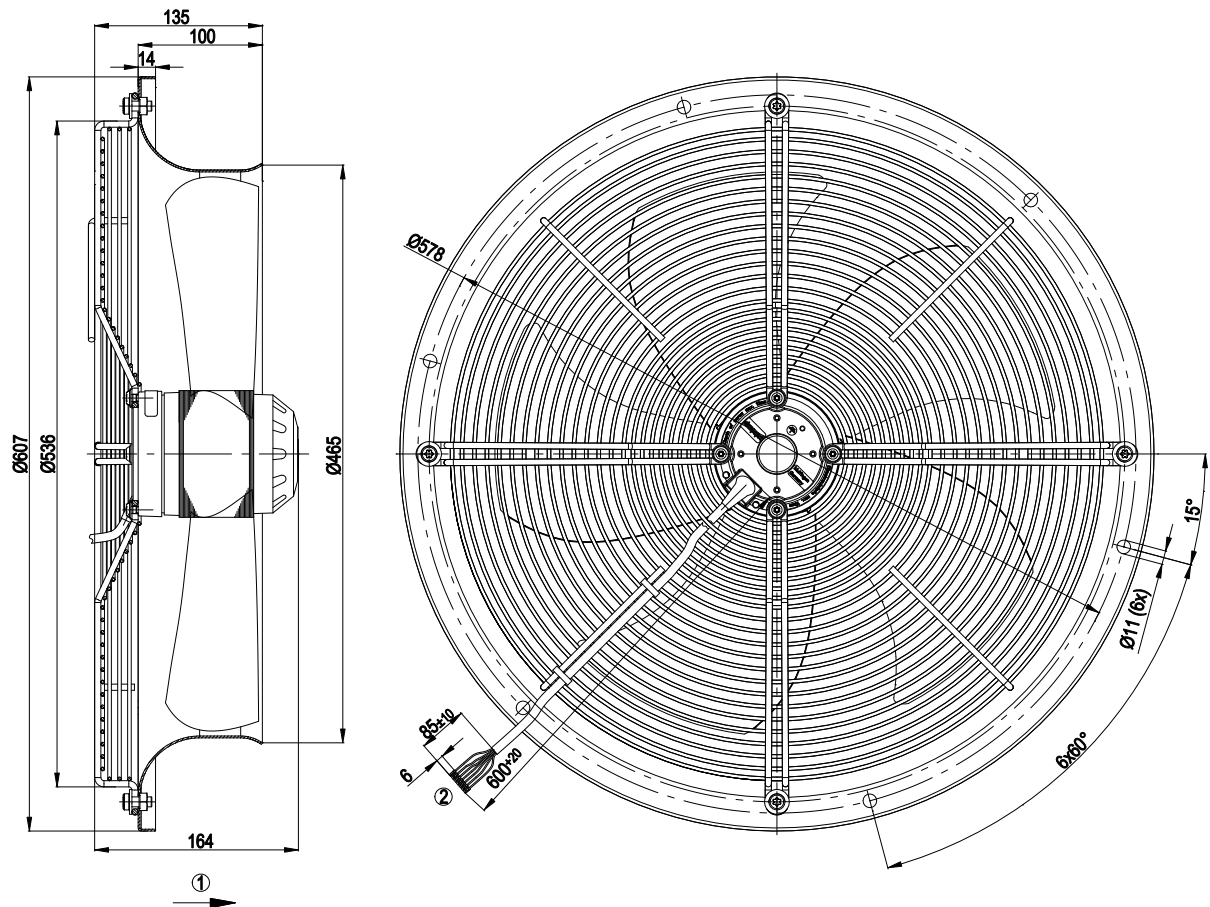


- | | |
|---|--|
| 1 | Direction of air flow "A" |
| 2 | Connection line halogen- and silicone-free, 0.5 mm ² , 7x brass lead tips crimped |



AC axial fan

sickled blades (S series)
with full round nozzle

Connection screen

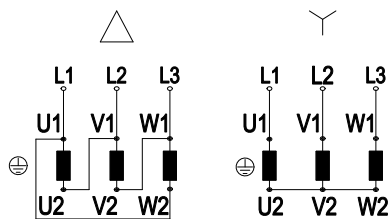


Note: Direction of rotation changes when two phases are reversed

Δ	Delta connection	Y	Star connection	L1	black
L2	blue	L3	brown	U1	black
V1	blue	W1	brown	U2	green
V2	white	W2	yellow		



AC axial fan
sickled blades (S series)
with full round nozzle

Charts: Air flow 50 Hz

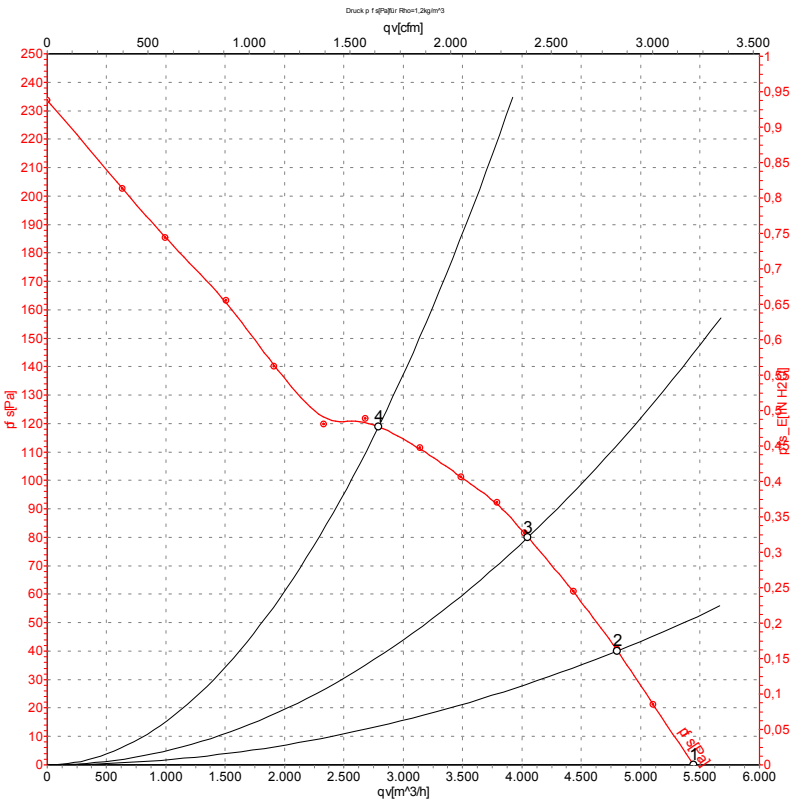

Measurement: LU-27634

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values


	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	400	50	1380	200	0.48	5445	0
2	400	50	1345	235	0.53	4800	40
3	400	50	1320	264	0.57	4050	80
4	400	50	1285	301	0.61	2790	120

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



AC axial fan
sickled blades (S series)
with full round nozzle

Charts: Air flow 60 Hz

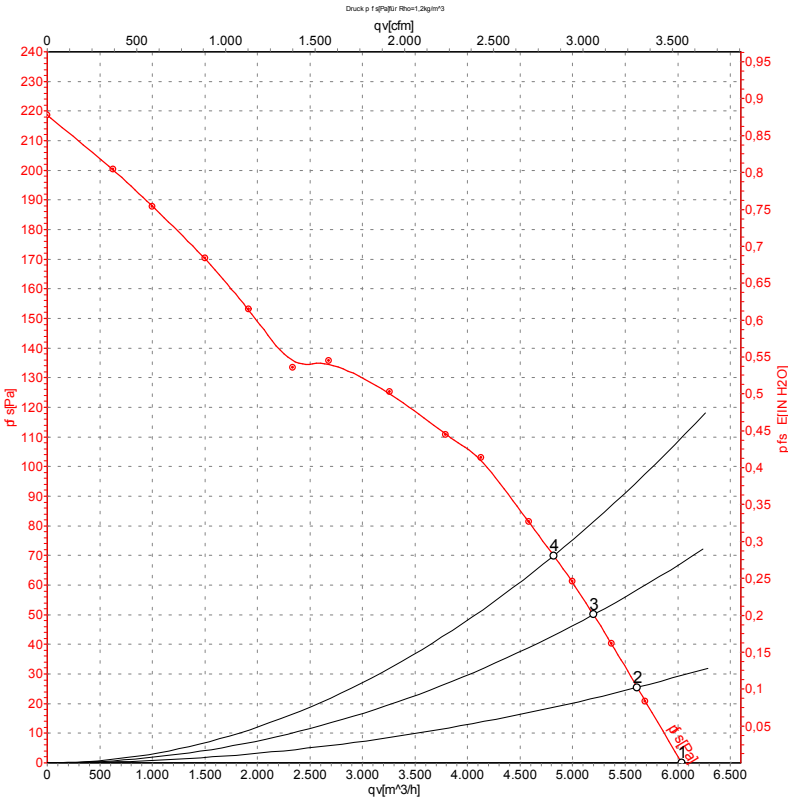

Measurement: LU-27635

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	400	60	1540	285	0.53	6040	0
2	400	60	1505	314	0.58	5615	25
3	400	60	1475	337	0.62	5200	50
4	400	60	1450	355	0.64	4820	70

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

