

AC axial fan

sickled blades (S series)

with full square nozzle

W4D450-GO18-11 ebmpapst Datasheet

sales@fansco.com

www.fansco.com



Nominal data

Type	W4D450-GO18-11		
Motor	M4D094-HA		
Phase		3~	3~
Nominal voltage	VAC	230	400
Connection		Δ	Y
Frequency	Hz	60	60
Type of data definition		ml	ml
Valid for approval / standard		CE	CE
Speed	min ⁻¹	1420	1420
Power input	W	580	580
Current draw	A	1.73	1.0
Max. back pressure	Pa	85	85
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	50	50

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2013	Request 2015	
Installation category	A	Overall efficiency η_{es}	31.2	27.2	31.2
Efficiency category	Static	Efficiency grade N	40	36	40
Variable speed drive	No	Power input P_e	kW	0.41	
Specific ratio*	1.00	Air flow q_v	m³/h	4510	
		Pressure increase p_{fs}	Pa	102	
		Speed n	min ⁻¹	1320	

* Specific ratio = $1 + p_B / 100\,000\text{ Pa}$

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$

Data established at point of optimum efficiency



AC axial fan

sickled blades (S series)

with full square nozzle

Technical features

Mass	12.6 kg
Size	450 mm
Surface of rotor	Coated in black
Material of blades	Press-fitted sheet steel blank, sprayed with PP plastic
Material of wall ring	Sheet steel, pre-galvanised and coated in black plastic (RAL 9005)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing with anti-freezing grease
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2004); CE




AC axial fan

sickled blades (S series)

with full square nozzle

Product drawing

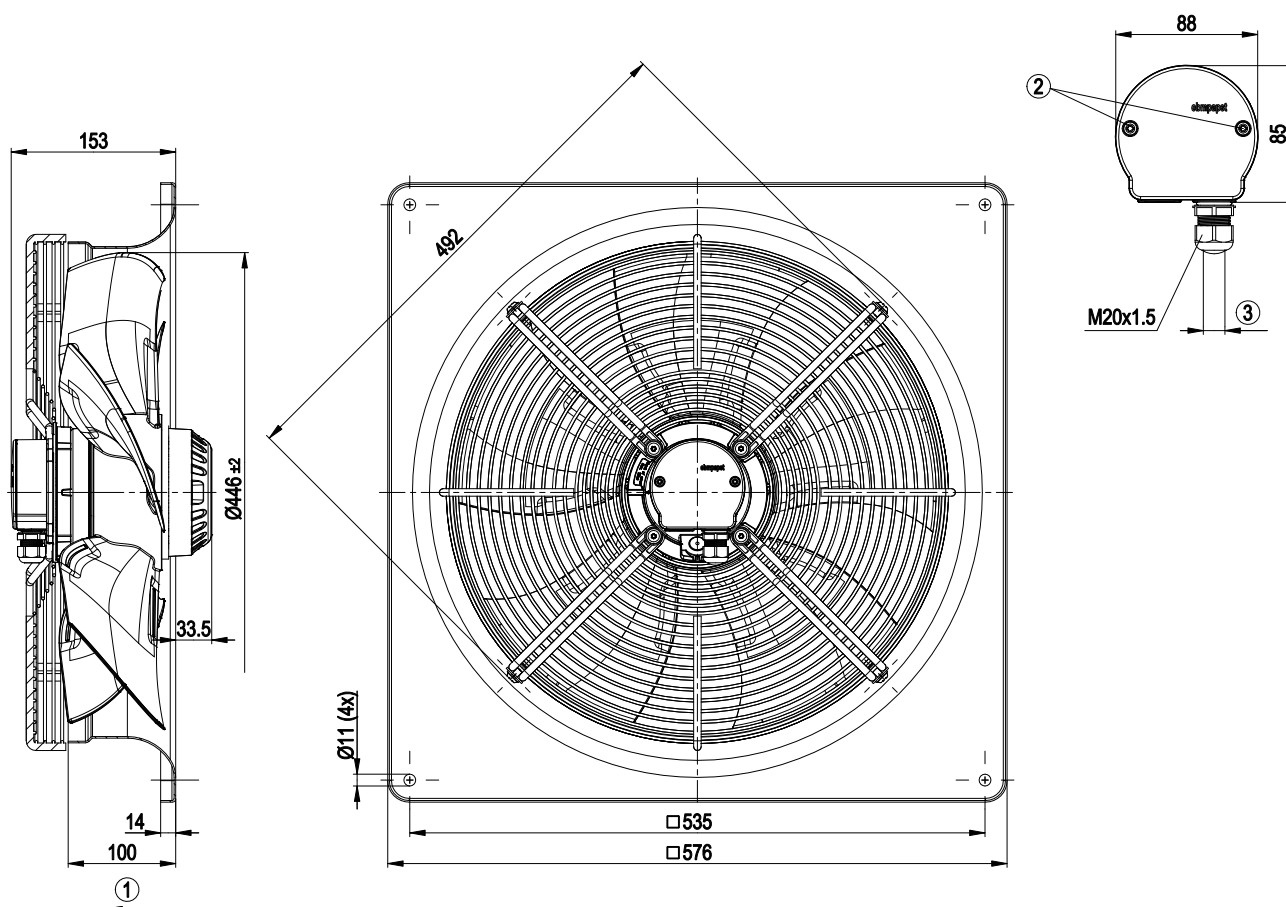


1	Direction of air flow "V"
2	Tightening torque 1.0 ± 0.15 Nm
3	Cable diameter: min. 6 mm, max. 12 mm; tightening torque: 2.0 ± 0.2 Nm

AC axial fan

sickled blades (S series)
with full square nozzle

Connection screen

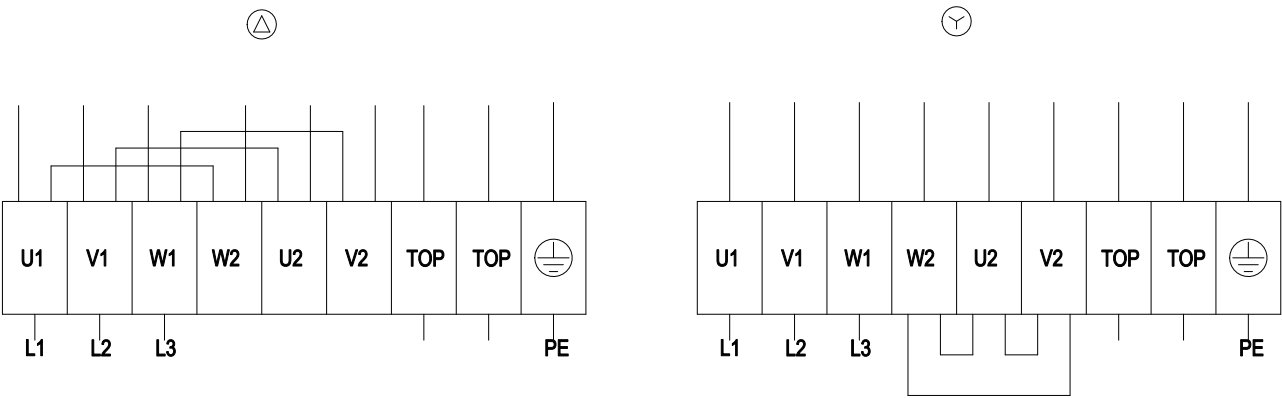


Δ	Delta-connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green / yellow				



AC axial fan
sickled blades (S series)
with full square nozzle

Charts: Air flow 50 Hz

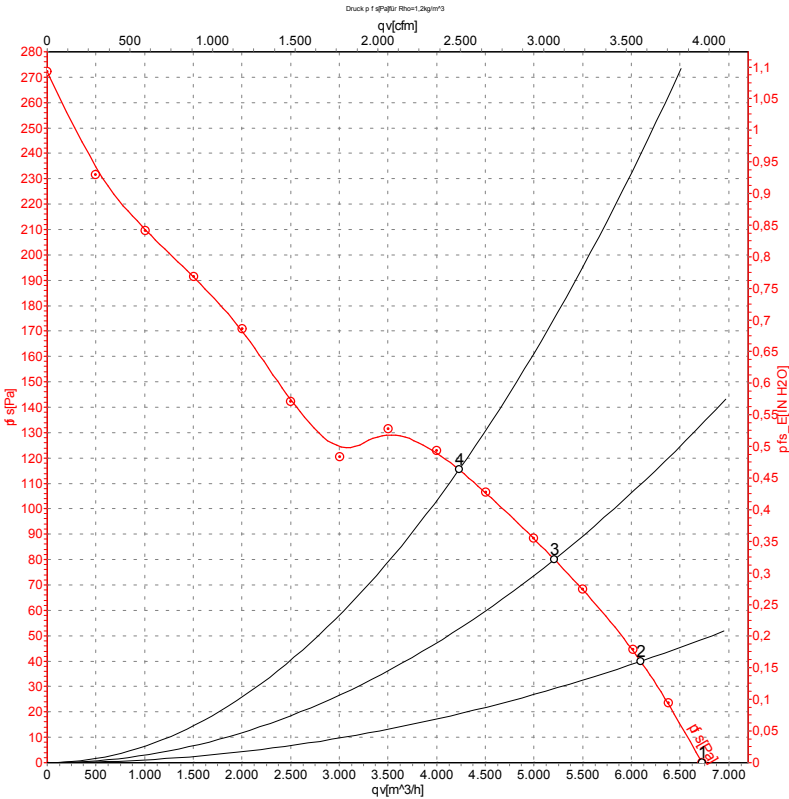

Measurement: LU-119179

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values


	Conn.	U	f	n	P _e	I	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa
1	Y	400	50	1360	346	0.69	6725	0
2	Y	400	50	1345	374	0.73	6095	40
3	Y	400	50	1330	399	0.76	5210	80
4	Y	400	50	1315	430	0.81	4230	115

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



AC axial fan
sickled blades (S series)
with full square nozzle

Charts: Air flow 60 Hz

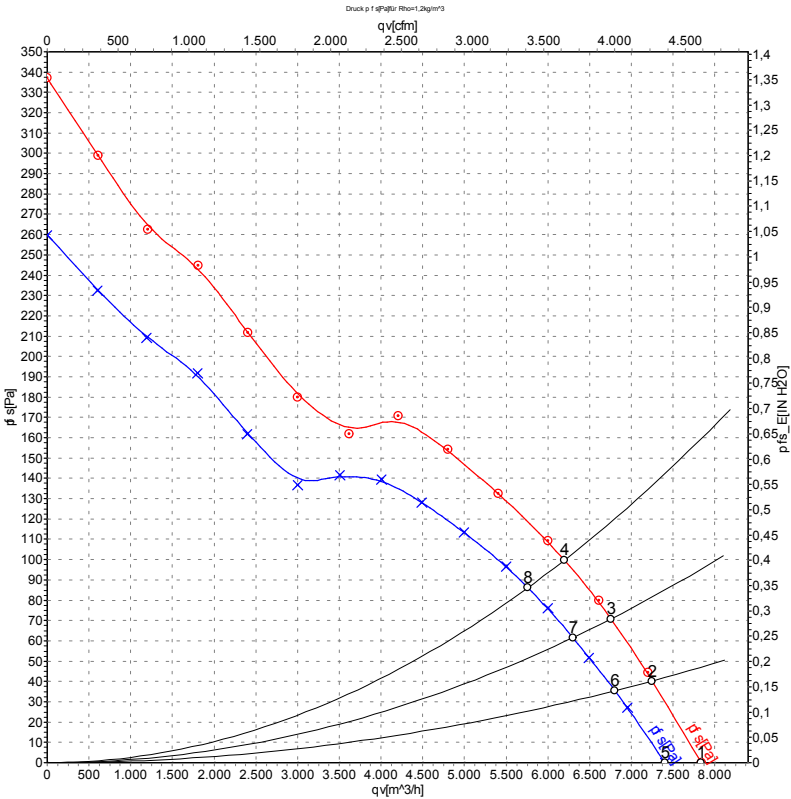

Measurement: LU-119186
Measurement: LU-119185

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa
1	Y	480	60	1575	560	0.84	7835	0
2	Y	480	60	1555	597	0.89	7245	40
3	Y	480	60	1540	621	0.92	6755	70
4	Y	480	60	1530	650	0.95	6200	100
5	Y	400	60	1485	514	0.89	7405	0
6	Y	400	60	1460	542	0.94	6805	36
7	Y	400	60	1440	559	0.96	6300	62
8	Y	400	60	1420	580	1.00	5760	85

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

