

AC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

W4D630-CI03-80 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W4D630-CI03-80				
Motor	M4D138-HF				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	277	400	480
Connection		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Type of data definition		fa	fa	fa	fa
Valid for approval / standard		CE	CE	CE	CE
Speed (rpm)	min ⁻¹	1410	1650	1410	1650
Power input	W	1130	2000	1130	2000
Current draw	A	4.2	5	2.4	2.9
Max. back pressure	Pa	200	160	200	160
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	70	60	70	60
Starting current	A	24	27	14	15.5

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
 Subject to alterations

Data in accordance with ecodesign regulation EU 327/2011 (EN 17166)

		Actual	Request 2015			
01 Overall efficiency η_{es}	%	35.3	34.9	09 Power input P_e	kW	1.59
02 Measurement category		A		09 Air flow q_v	m ³ /h	9965
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	204
04 Efficiency grade N		40.4	40	10 Speed (rpm) n	min ⁻¹	1365
05 Variable speed drive		No		11 Specific ratio*		1.00

Data definition with optimum efficiency.
 The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-174101



AC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Technical features

Mass	35 kg
Size	630 mm
Motor size	138
Surface of rotor	Coated in black
Material of terminal box	Die-cast aluminium, coated in black
Material of blades	Aluminium sheet insert (coated in black), sprayed with PP plastic
Material of wall ring	Sheet steel, galvanised and plastic-coated in white aluminium (RAL 9006)
Material of guard grille	Steel, coated in white aluminium plastic (RAL 9006)
Number of blades	5
Blade angle	-10°
Direction of air flow	A
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP55
Insulation class	"F"
Humidity (F) / environmental protection class (H)	H2+T
Note ambient temperature	Occasional start-up between -40 °C and -25 °C is permissible. For continuous operation at ambient temperatures below -25 °C (e.g. refrigeration applications), a fan version with special low-temperature bearings must be used.
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	On the stator side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	≤ 3.5 mA
Electrical connection	Terminal box
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2010); CE
Approval	CSA C22.2 no. 100; EAC; UL 1004-1




AC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Product drawing

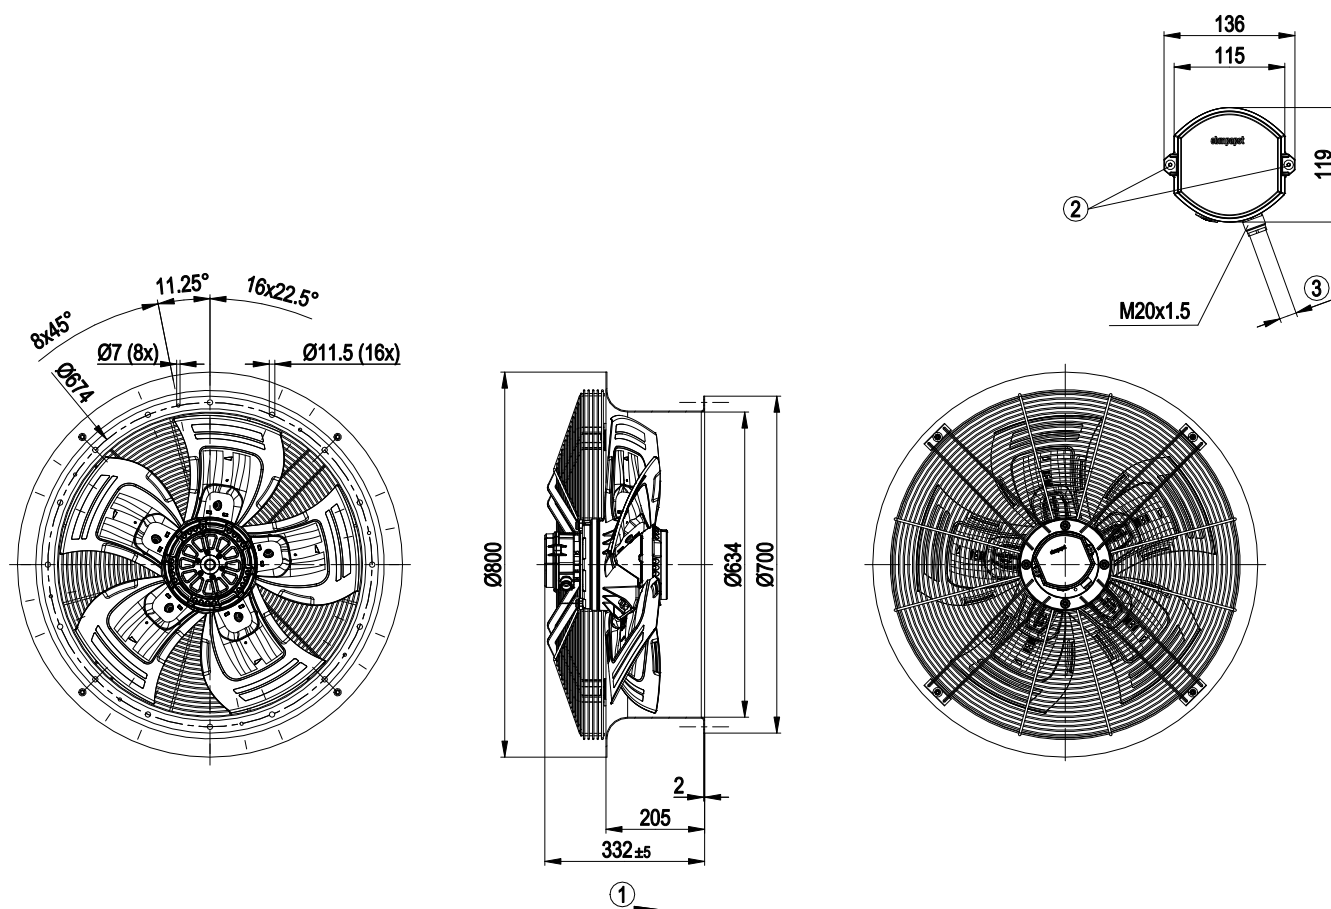


1	Direction of air flow "A"
2	Tightening torque 2.5 ± 0.4 Nm
3	Cable diameter min. 10 mm, max. 12 mm, tightening torque 4 ± 0.6 Nm

AC axial fan - HyBlade

sickled blades (S series)
with full round nozzle, Transformator fan

Connection screen

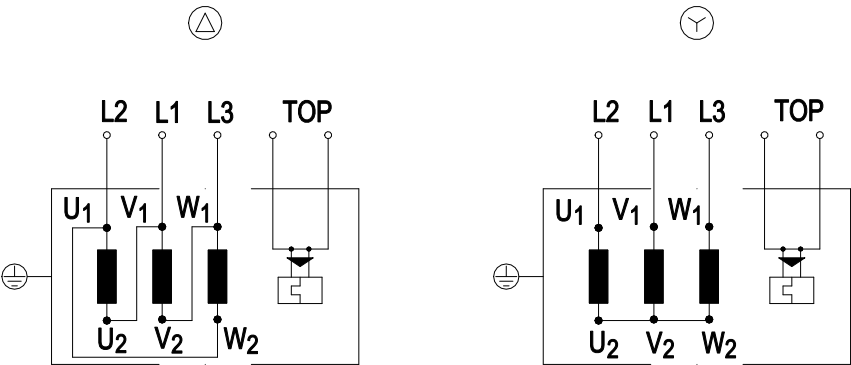

Change direction of rotation by reversing two phases

Δ	Delta connection	Y	Star connection	L2	= U1 = black
L1	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2x grey
PE	green/yellow				




AC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Charts: Air flow 50 Hz

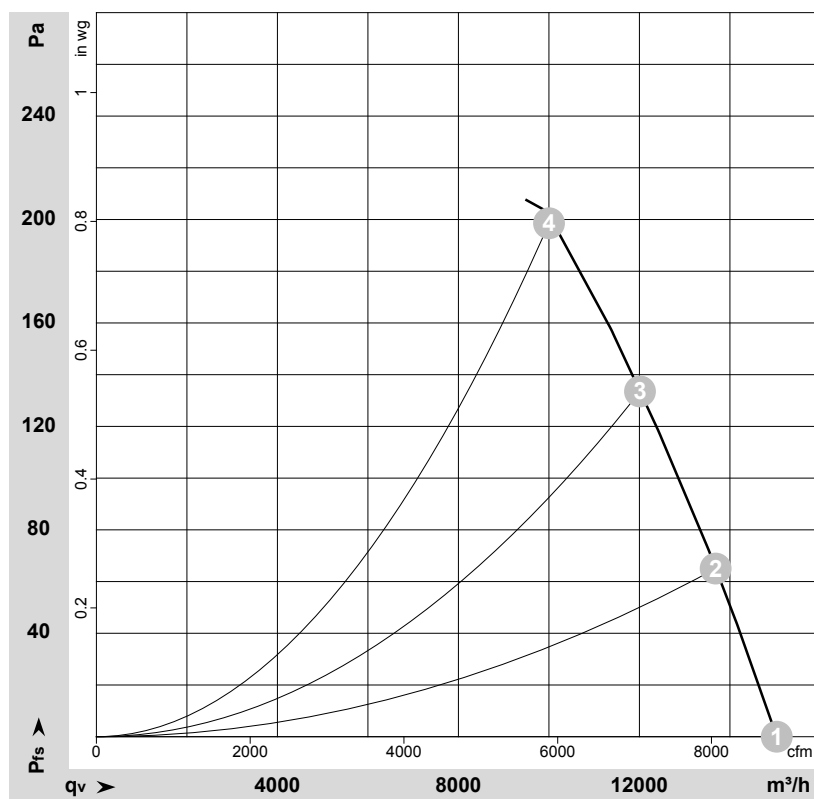

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-174101-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	Y	400	50	1410	1130	2.40	75	82	81	15035	0	8850	0.00
2	Y	400	50	1395	1286	2.56	75	81	80	13685	65	8055	0.26
3	Y	400	50	1380	1438	2.76	74	80	79	12015	135	7070	0.54
4	Y	400	50	1365	1592	2.96	75	81	79	10000	200	5885	0.80


Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
 LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase



AC axial fan - HyBlade

sickled blades (S series)
with full round nozzle, Transformator fan

Charts: Air flow 60 Hz

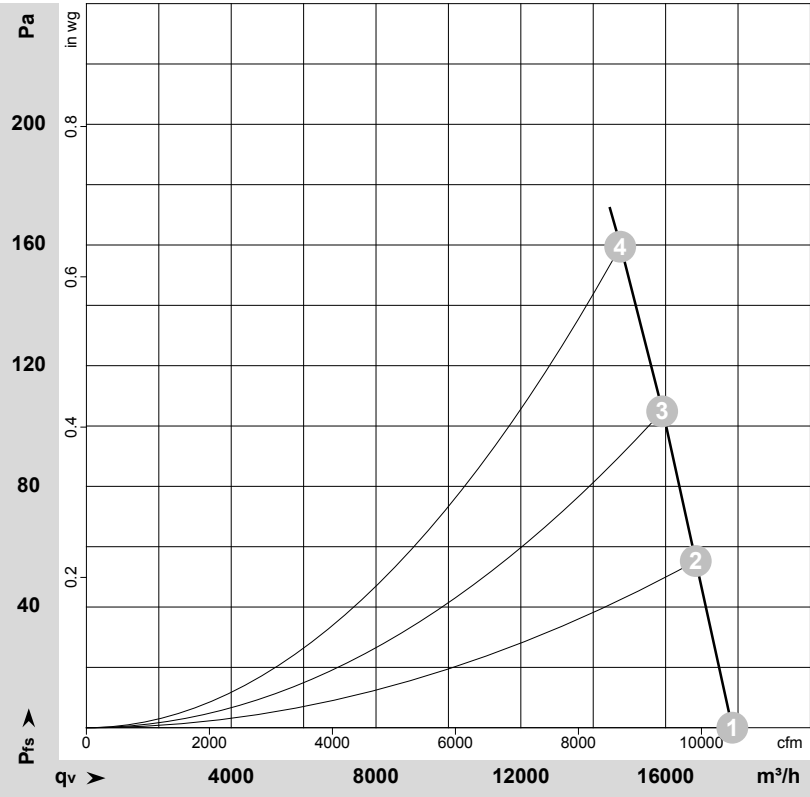

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-174108-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	Y	480	60	1670	2000	2.90	79	86	85	17840	0	10500	0.00
2	Y	480	60	1655	2051	3.14	79	86	84	16835	55	9910	0.22
3	Y	480	60	1645	2182	3.30	79	85	84	15905	105	9360	0.42
4	Y	480	60	1630	2328	3.47	78	85	83	14745	160	8680	0.64

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

