

AC axial fan

sickled blades (S series)

with full square nozzle

W4D630-GL03-06 ebmpapst Datasheet

sales@fansco.com

www.fansco.com



Nominal data

Type	W4D630-GL03-06				
Motor	M4D138-LA				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	277	400	480
Connection		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Type of data definition		ml	ml	ml	ml
Valid for approval / standard		CE	CE	CE	CE
Speed	min ⁻¹	1400	1650	1400	1650
Power input	W	1770	2910	1770	2910
Current draw	A	7.1	8.5	4.1	4.91
Max. back pressure	Pa	250	350	250	350
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	85	60	85	60
Starting current	A			27	

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
 Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio*	1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

	Actual	Request 2013	Request 2015
Overall efficiency η_{es}	38.2	31.1	35.1
Efficiency grade N	43.1	36	40
Power input P_e	kW	1.67	
Air flow q_v	m ³ /h	11045	
Pressure increase p_{fs}	Pa	209	
Speed n	min ⁻¹	1405	

Data established at point of optimum efficiency



AC axial fan

sickled blades (S series)

with full square nozzle

Technical features

Mass	40.2 kg
Size	630 mm
Surface of rotor	Cast in aluminium
Material of terminal box	PC / ABS plastic
Material of blades	Die-cast aluminium
Material of wall ring	Sheet steel, pre-galvanised and coated in black plastic (RAL 9005)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade angle	10°
Direction of air flow	"V"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensate discharge holes	On rotor and stator sides
Operation mode	S1
Motor bearing	Ball bearing with anti-freezing grease
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out
Cable exit	Axial
Protection class	I (if protective earth is connected by customer at the connection point of the housing)
Product conforming to standard	EN 60034; EN 61800-5-1; CE
Approval	UL 1004-1; CSA C22.2 Nr.100




AC axial fan

sickled blades (S series)

with full square nozzle

Product drawing

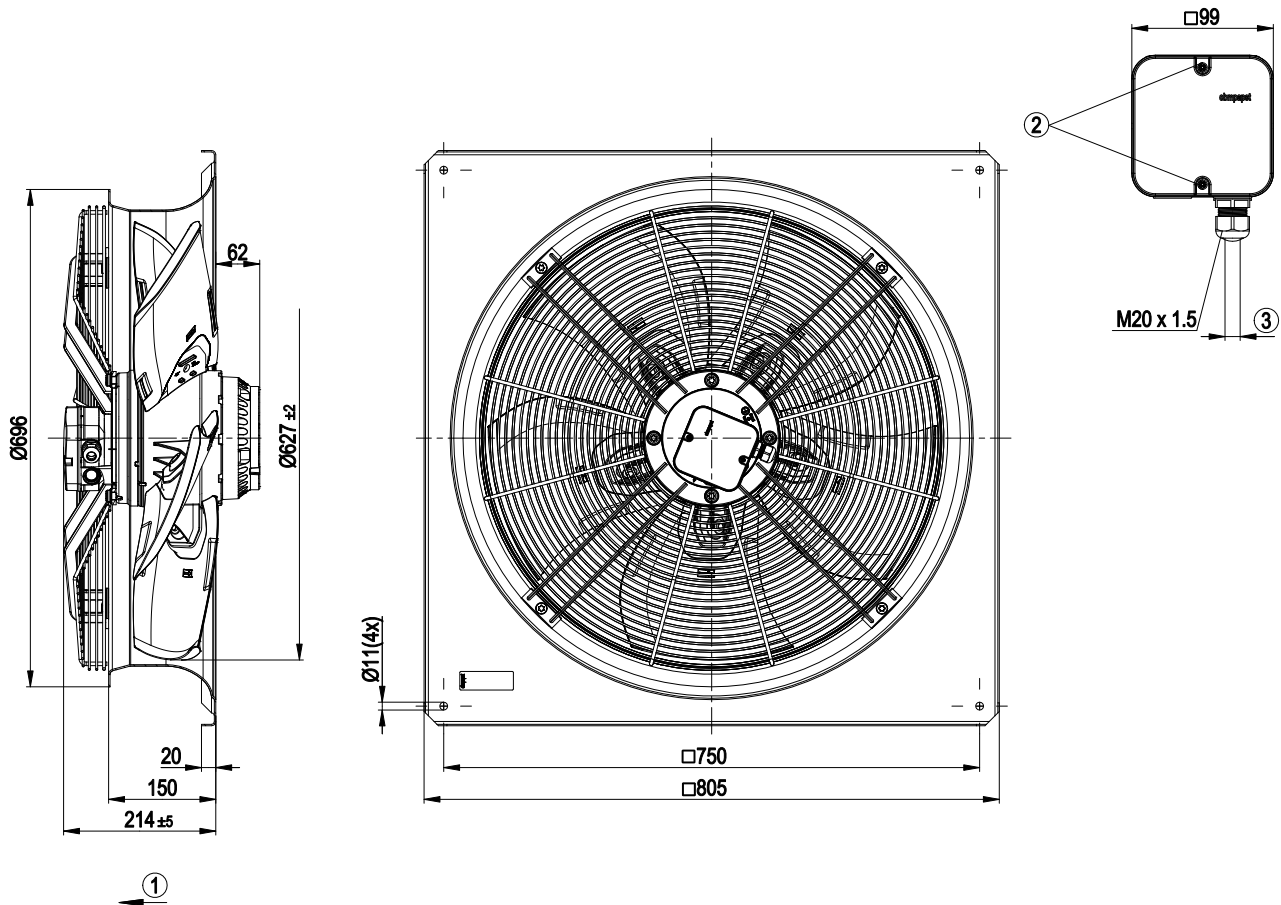


1	Direction of air flow "V"
2	Tightening torque 1.5 ± 0.2 Nm
3	Cable diameter: min. 7 mm, max. 14 mm, tightening torque: 2 ± 0.3 Nm

AC axial fan

sickled blades (S series)
with full square nozzle

Connection screen

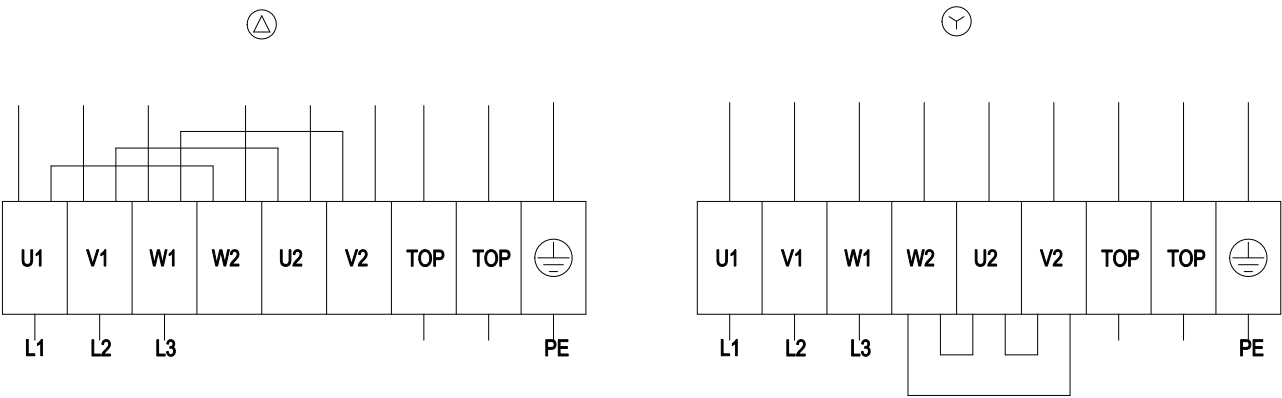


Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green/yellow				



AC axial fan
sickled blades (S series)
with full square nozzle

Charts: Air flow 50 Hz

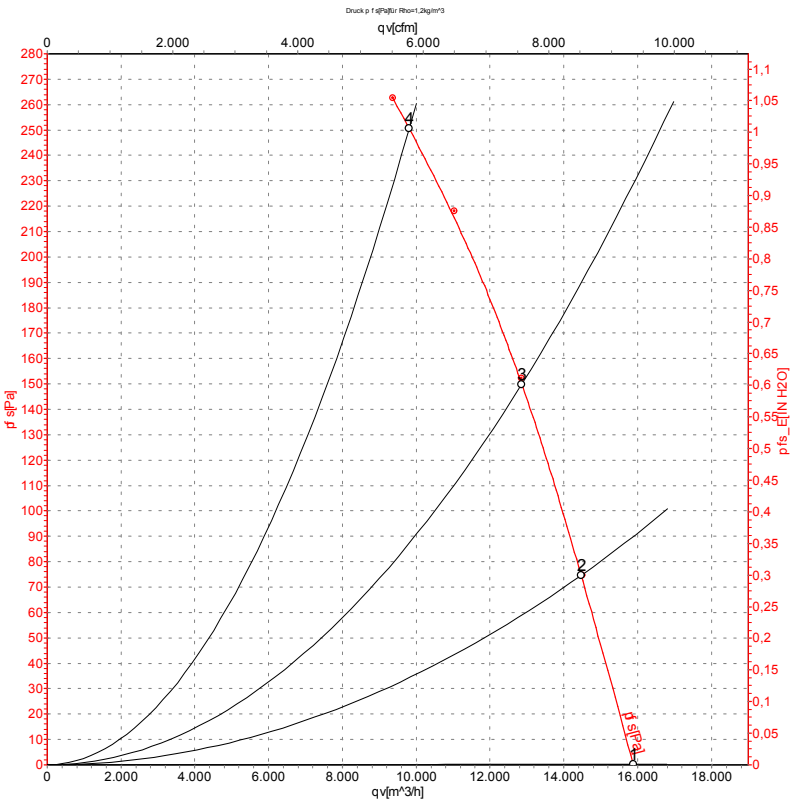

Measurement: LU-101583

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values


	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa
1	Y	400	50	1445	1138	3.45	74	80	15880	0
2	Y	400	50	1430	1331	3.57	70	76	14470	75
3	Y	400	50	1415	1521	3.79	70	76	12860	150
4	Y	400	50	1400	1770	4.10	76	83	9810	250

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
qv = Air flow · p_{fs} = Pressure increase



AC axial fan
sickled blades (S series)
with full square nozzle

Charts: Air flow 60 Hz

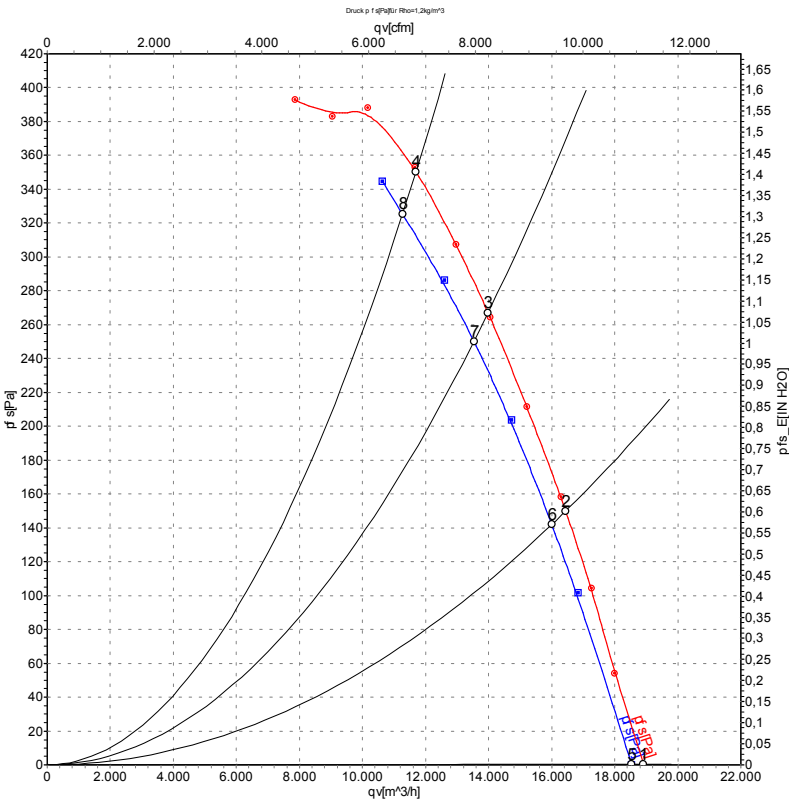

Measurement: LU-101584
Measurement: LU-101640

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{wA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa
1	Y	480	60	1715	1850	3.78	78	84	18920	0
2	Y	480	60	1690	2306	4.24	73	80	16440	150
3	Y	480	60	1665	2665	4.63	76	83	13980	265
4	Y	480	60	1650	2910	4.91	80	87	11690	350
5	Y	400	60	1680	1716	3.45	78	84	18540	0
6	Y	400	60	1640	2138	4.08	73	80	16000	142
7	Y	400	60	1610	2442	4.56	76	82	13540	250
8	Y	400	60	1585	2670	4.92	79	86	11270	325

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
qv = Air flow · p_{fs} = Pressure increase

