

AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

W6D800-GF07-46 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W6D800-GF07-46		
Motor	M6D138-LA		
Phase		3~	3~
Nominal voltage	VAC	575	575
Connection		Δ	Y
Frequency	Hz	60	60
Type of data definition		ml	ml
Valid for approval / standard		CE	CE
Speed (rpm)	min ⁻¹	1100	880
Power input	W	1800	1250
Current draw	A	2.7	1.7
Max. back pressure	Pa	200	125
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	70	70

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Technical features

Mass	44 kg
Size	800 mm
Surface of rotor	Cast in aluminium
Material of terminal box	PP plastic
Material of blades	Aluminium sheet insert, sprayed with PP plastic
Material of wall ring	Sheet steel, galvanised and coated in black plastic (RAL 9005)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade angle	-10°
Direction of air flow	"V"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity (F)/environmental protection class (H)	H2
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensate discharge holes	On rotor and stator sides
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2010); EN 61800-5-1; CE
Approval	UL 1004-1; CSA C22.2 No.100; EAC




AC axial fan - HyBlade

sickled blades (S series)

with full square nozzle

Product drawing

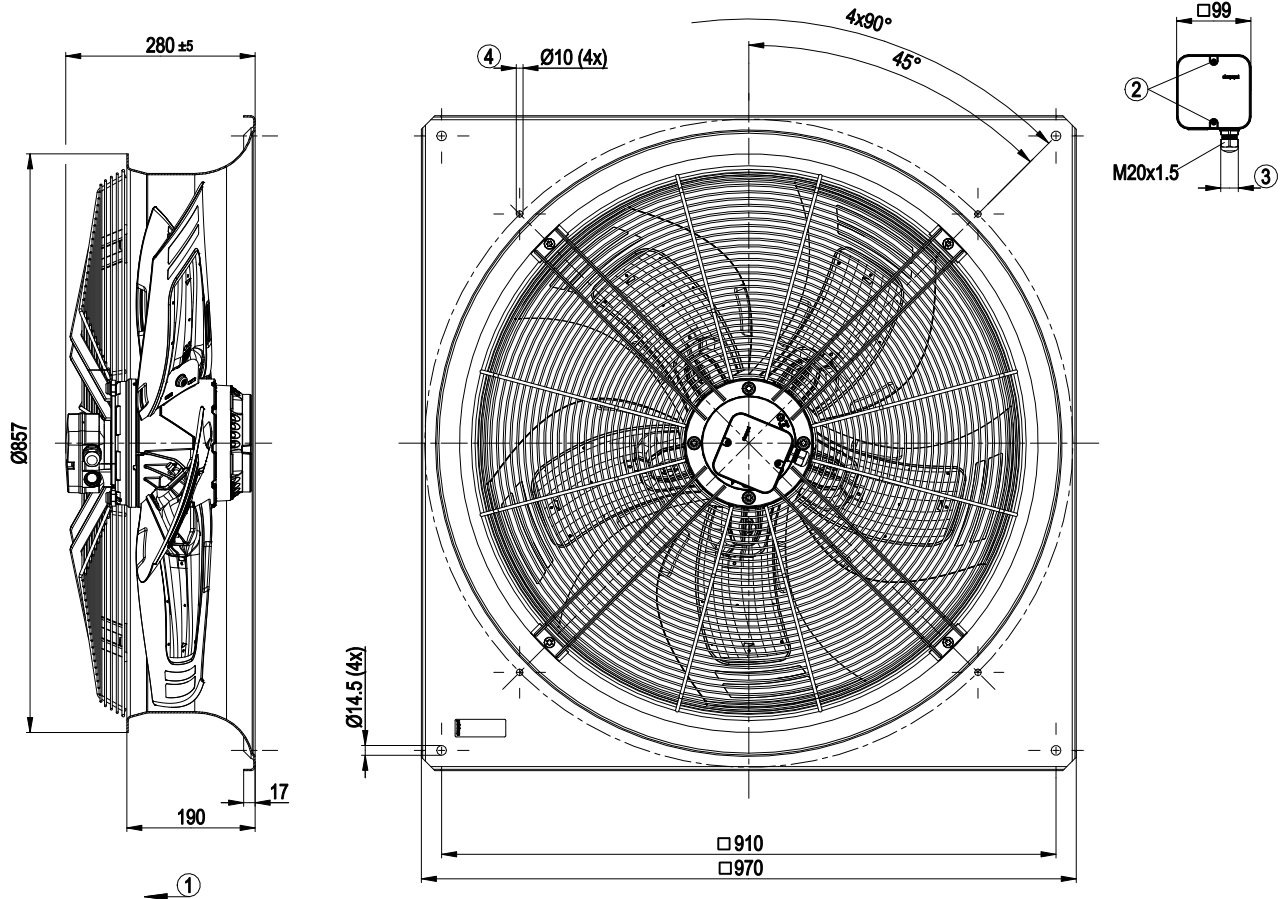


1	Direction of air flow "V"
2	Tightening torque 1.5±0.2 Nm
3	Cable diameter: min. 7 mm, max. 14 mm, tightening torque 2±0.3 Nm
4	Mounting holes for FlowGrid

AC axial fan - HyBlade

sickled blades (S series)
with full square nozzle


Connection screen

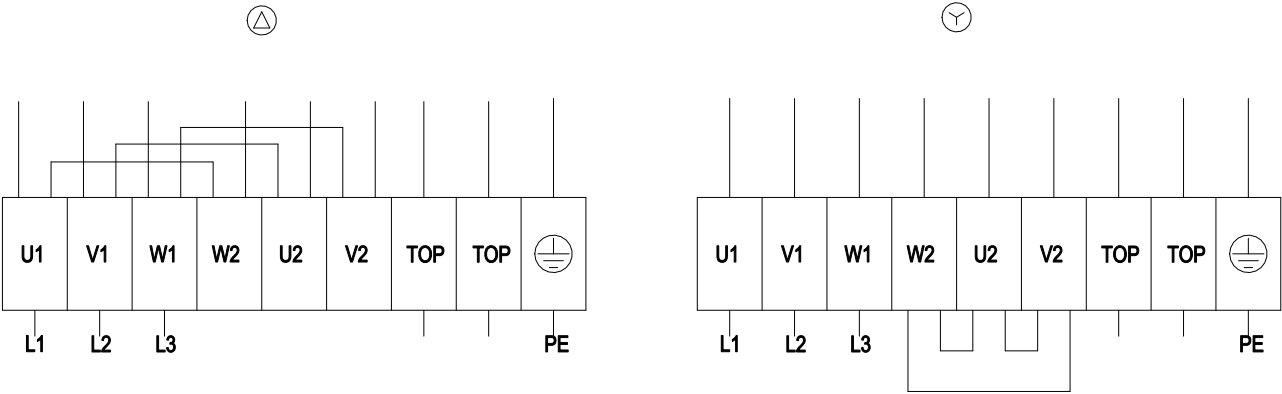

Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green/yellow				



Charts: Air flow 60 Hz Y

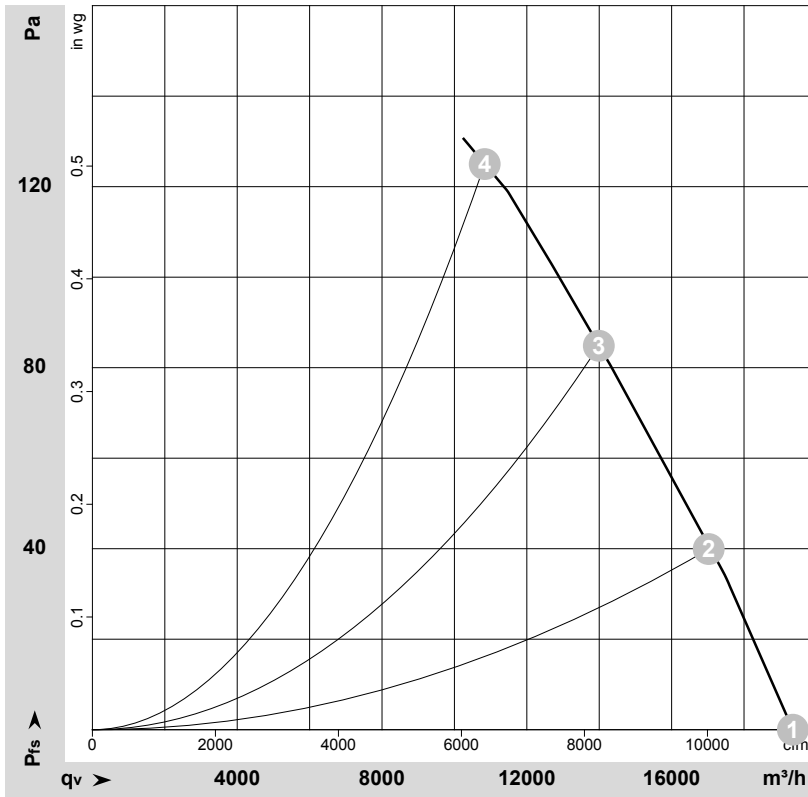

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-176307-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	inH ₂ O
1	Y. AUS	575	60	1025	914	1.27	67	74	73	19350	0	11390	0.00
2	Y. AUS	575	60	980	1034	1.32	66	73	72	17025	40	10020	0.16
3	Y. AUS	575	60	925	1160	1.61	66	73	71	13990	85	8235	0.34
4	Y. AUS	575	60	880	1250	1.70	68	75	74	10835	125	6380	0.50


Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase



AC axial fan - HyBlade

sickled blades (S series)
with full square nozzle

Charts: Air flow 60 Hz Δ

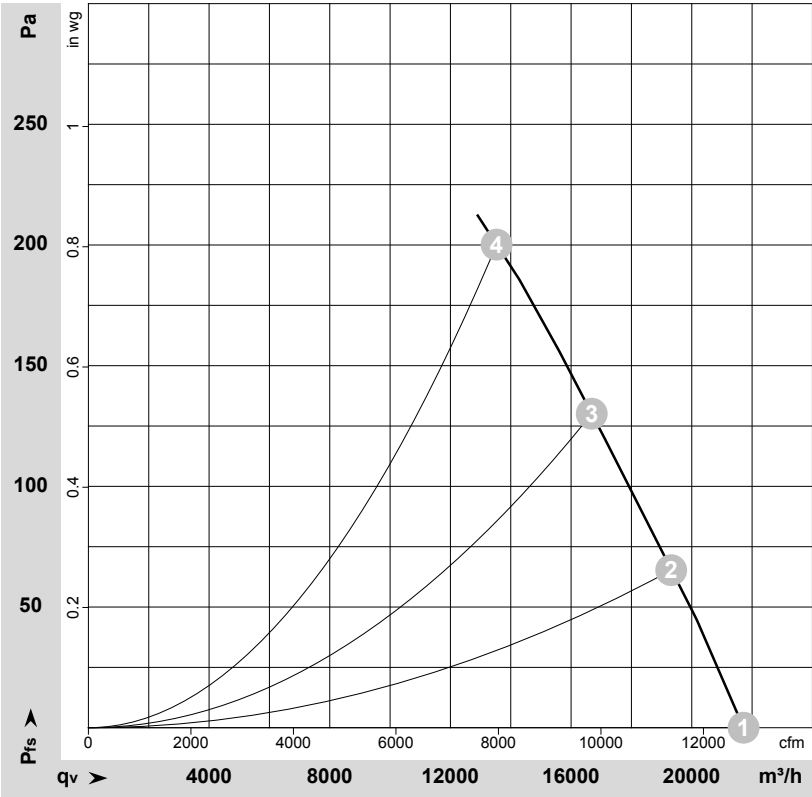

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-176191-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	Δ	575	60	1145	1146	1.99	72	79	78	21720	0	12785	0.00
2	Δ	575	60	1130	1389	2.28	70	77	76	19320	66	11370	0.26
3	Δ	575	60	1120	1614	2.53	71	77	76	16685	130	9820	0.52
4	Δ	575	60	1105	1804	2.70	74	81	80	13530	200	7965	0.80

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

