

AC axial fan

sickled blades (S series)
with full square nozzle

W6D800-GJ01-40 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W6D800-GJ01-40		
Motor	M6D138-LA		
Phase		3~	3~
Nominal voltage	VAC	400	400
Connection		Δ	Y
Frequency	Hz	50	50
Type of data definition		ml	ml
Valid for approval / standard		CE	CE
Speed (rpm)	min ⁻¹	895	685
Power input	W	2000	1270
Current draw	A	4.3	2.5
Max. back pressure	Pa	180	100
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	60	60
Starting current	A	13	4.3

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	35.4	35.2
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		40.2	40
05 Variable speed drive		No	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_e	kW	1.76
09 Air flow q_v	m³/h	17035
09 Pressure increase p_{fs}	Pa	132
10 Speed (rpm) n	min ⁻¹	900
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-100640



AC axial fan

sickled blades (S series)

with full square nozzle

Technical features

Mass	45 kg
Size	800 mm
Surface of rotor	Cast in aluminium
Material of terminal box	PP plastic
Material of blades	Die-cast aluminium
Material of wall ring	Sheet steel, galvanised and coated in traffic white plastic (RAL 9016)
Material of guard grille	Steel, coated in black plastic (RAL9005)
Number of blades	5
Blade angle	0°
Direction of air flow	"V"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity (F)/environmental protection class (H)	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	On rotor and stator sides
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2010); EN 61800-5-1; CE
Approval	VDE; EAC




AC axial fan

sickled blades (S series)

with full square nozzle

Product drawing

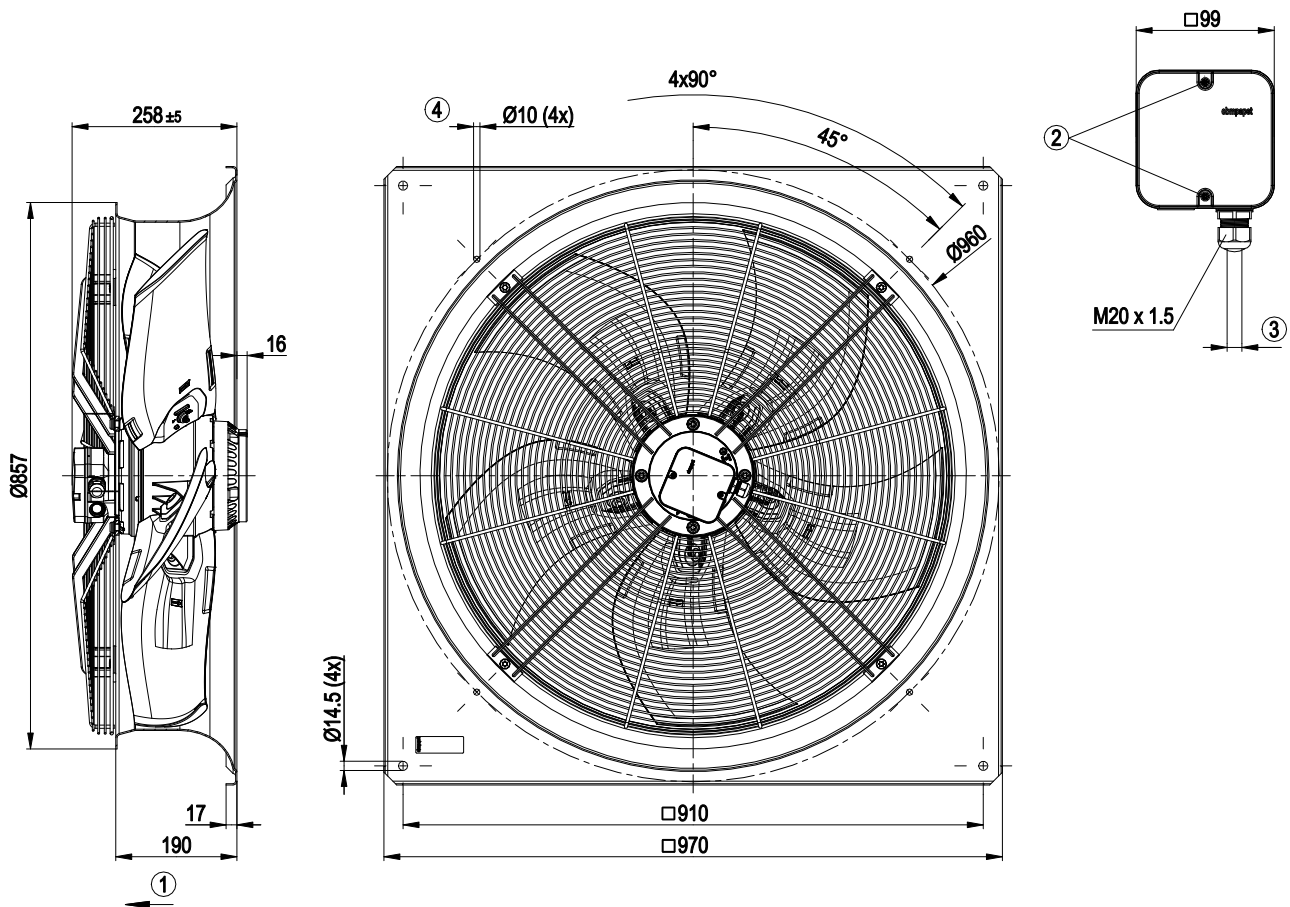


1	Direction of air flow "V"
2	Tightening torque 1.5 ± 0.2 Nm
3	Cable diameter: min. 7 mm, max. 14 mm, tightening torque 2 ± 0.3 Nm
4	Mounting holes for FlowGrid

AC axial fan

sickled blades (S series)
with full square nozzle

Connection screen

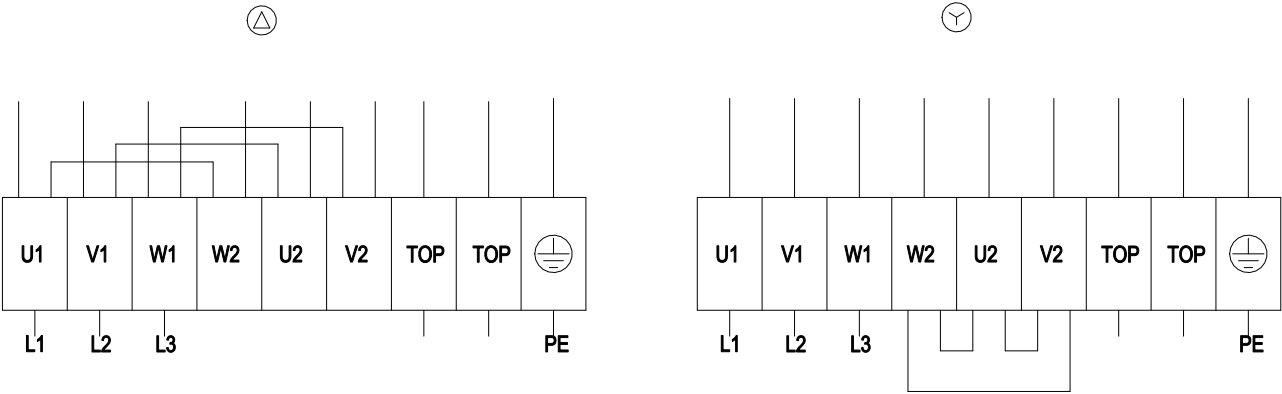


Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green/yellow				



AC axial fan

sickled blades (S series)
with full square nozzle

Charts: Air flow 50 Hz

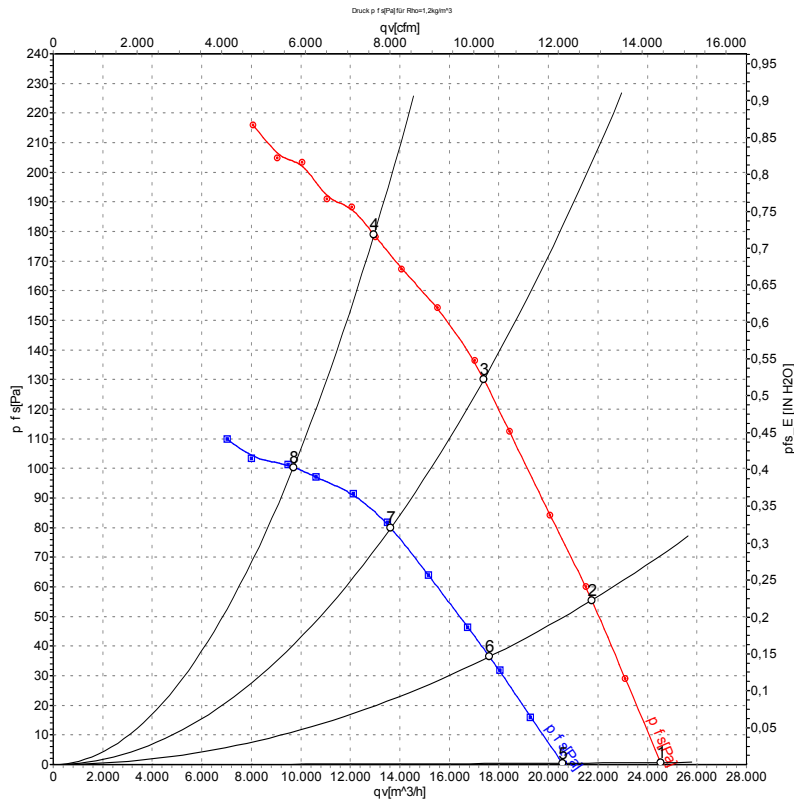

Measurement: LU-100640-1
Measurement: LU-100800-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{wA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	L _{pA_{in}}	L _{wA_{in}}	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	inH ₂ O
1	Δ	400	50	930	1440	3.50	67	73	24530	0	14440	0.00
2	Δ	400	50	915	1561	3.50	65	71	21750	55	12800	0.22
3	Δ	400	50	900	1749	3.63	66	72	17390	130	10235	0.52
4	Δ	400	50	895	2000	4.30	71	78	12960	180	7630	0.72
5	Y	400	50	785	1030	1.90	63	70	20570	0	12105	0.00
6	Y	400	50	750	1080	2.02	61	68	17620	36	10370	0.14
7	Y	400	50	705	1157	2.17	61	67	13630	80	8020	0.32
8	Y	400	50	685	1270	2.50	64	72	9705	100	5710	0.40

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · L_{pA_{in}} = Sound pressure level inlet side · L_{wA_{in}} = Sound power level inlet side
q_v = Air flow · P_{fs} = Pressure increase

