

AC axial fan - HyBlade

sickled blades (S series)
with full round nozzle

W8D800-CD05-88 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W8D800-CD05-88				
Motor	M8D138-LA				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	277	400	480
Connection		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Type of data definition		fa	fa	fa	fa
Valid for approval / standard		-	-	-	-
Speed (rpm)	min ⁻¹	685	810	685	810
Power input	W	705	1090	705	1090
Current draw	A	3.6	4.2	2.1	2.4
Max. back pressure	Pa	80	65	80	65
Min. ambient temperature	°C	-25	-25	-25	-25
Max. ambient temperature	°C	70	70	70	70
Starting current	A	11	12	6.5	7

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



AC axial fan - HyBlade

sickled blades (S series)

with full round nozzle

Technical features

Mass	45 kg
Size	800 mm
Surface of rotor	Coated in black
Material of terminal box	Die-cast aluminium, coated in black
Material of blades	Aluminium sheet insert (coated in black), sprayed with PP plastic
Material of wall ring	Sheet steel, galvanised and coated in telegrey plastic (RAL 7047)
Material of guard grille	Steel, galvanised and plastic-coated in telegrey (RAL 7047)
Number of blades	5
Blade angle	0°
Direction of air flow	"A"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 55
Insulation class	"F"
Humidity (F)/environmental protection class (H)	H2+
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensate discharge holes	On the stator side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2010); EN 61800-5-1
Approval	UL 1004-1; CSA C22.2 No.100; EAC




AC axial fan - HyBlade

sickled blades (S series)

with full round nozzle

Product drawing

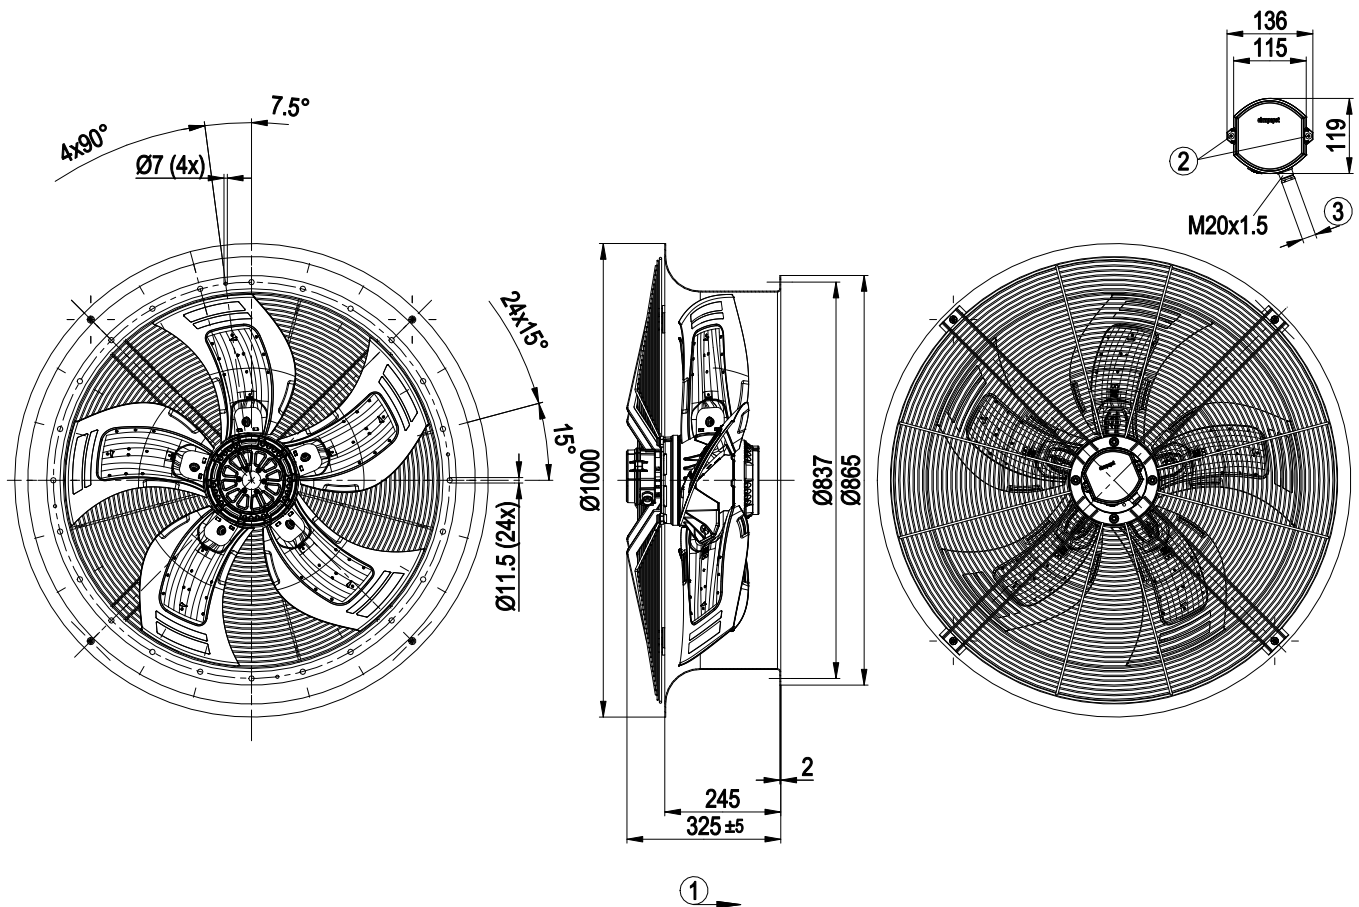


1	Direction of air flow "A"
2	Tightening torque 2.5 ± 0.4 Nm
3	Cable diameter min. 10 mm, max. 12 mm, tightening torque 4 ± 0.4 Nm

AC axial fan - HyBlade

sickled blades (S series)
with full round nozzle

Connection screen

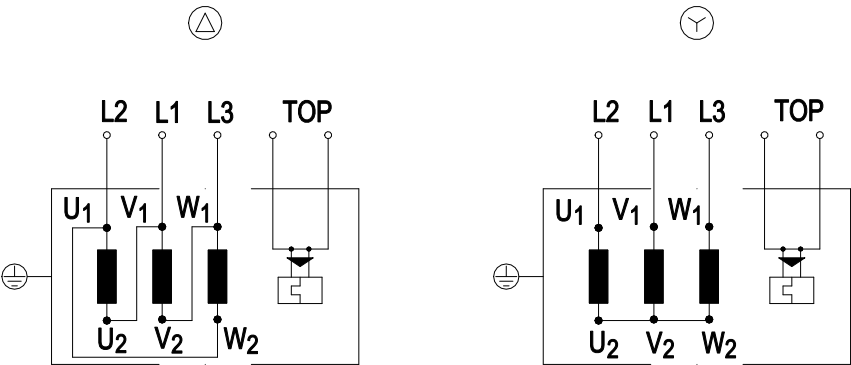

Change direction of rotation by reversing two phases


Δ	Delta connection	Y	Star connection	L2	= U1 = black
L1	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2x grey
PE	green/yellow				



AC axial fan - HyBlade

sickled blades (S series)
with full round nozzle

Charts: Air flow 50 Hz

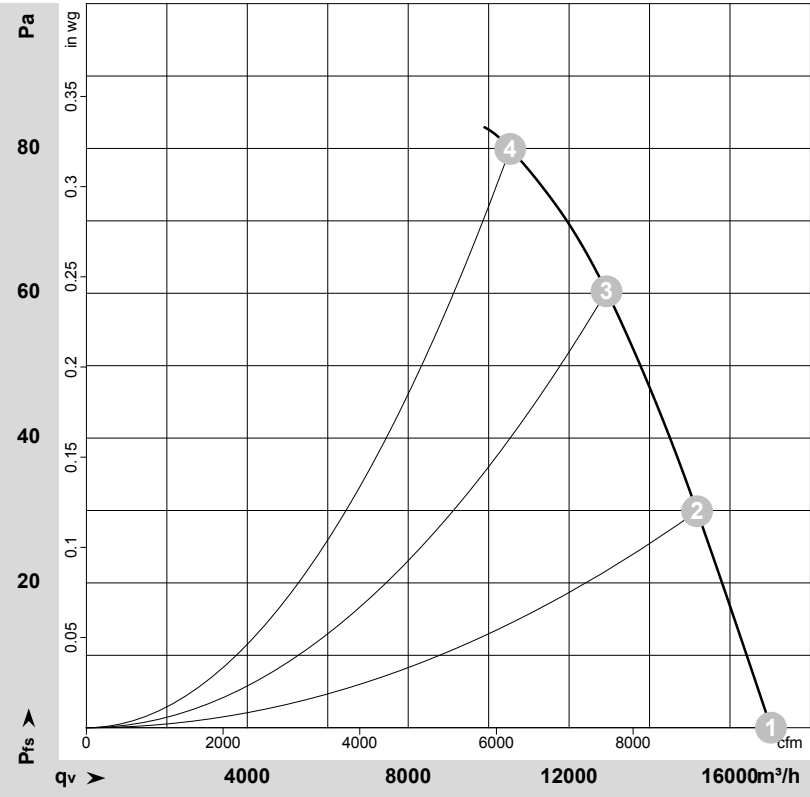

$\rho = 1.176 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-159547-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	Y	400	50	685	705	2.10	65	72	71	17020	0	10020	0.00
2	Y	400	50	680	751	2.06	64	71	70	15180	30	8935	0.12
3	Y	400	50	675	804	2.11	64	70	70	12930	60	7610	0.24
4	Y	400	50	670	842	2.15	65	71	70	10535	80	6200	0.32


Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase



AC axial fan - HyBlade

sickled blades (S series)
with full round nozzle

Charts: Air flow 60 Hz

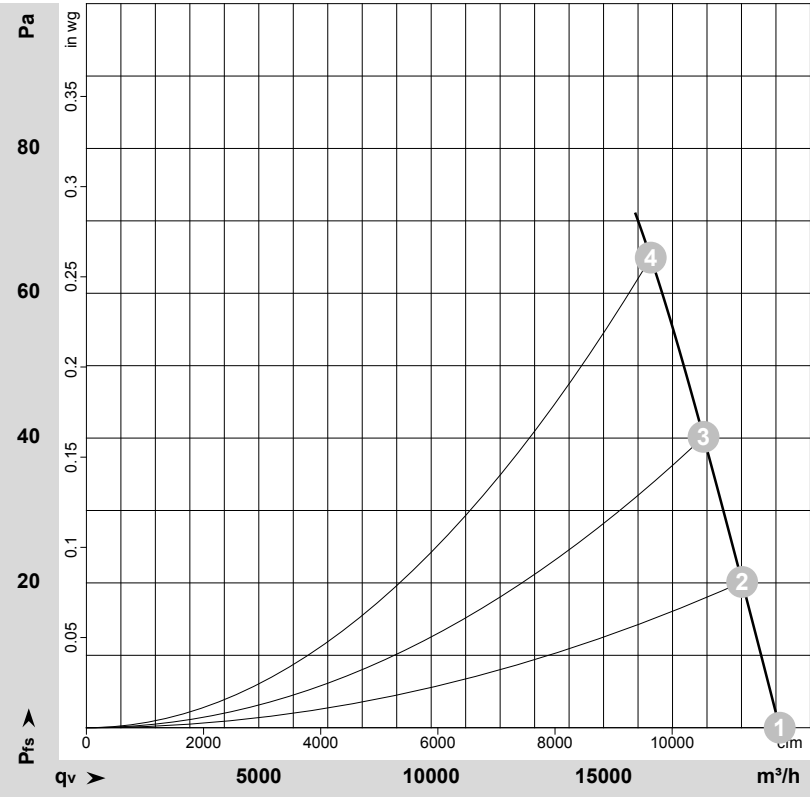

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-170001-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	Y	480	60	810	1090	2.40	69	75	75	20110	0	11835	0.00
2	Y	480	60	805	1133	2.44	68	75	74	19020	20	11195	0.08
3	Y	480	60	800	1175	2.49	68	74	73	17900	40	10535	0.16
4	Y	480	60	795	1230	2.55	67	74	73	16370	65	9635	0.26

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

