

AC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

W8D910-CE07-80 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	W8D910-CE07-80				
Motor	M8D138-LA				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	277	400	480
Connection		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Type of data definition		fa	fa	fa	fa
Valid for approval / standard		-	-	-	-
Speed (rpm)	min ⁻¹	700	820	700	820
Power input	W	680	1070	680	1070
Current draw	A	3.8	4.2	2.2	2.4
Max. back pressure	Pa	90	110	90	110
Min. ambient temperature	°C	-40	-40	-40	-40
Max. ambient temperature	°C	80	60	80	60
Starting current	A	19	20	11	11.5

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit

Subject to alterations

Data in accordance with ecodesign regulation EU 327/2011

		Actual	Request 2015
01 Overall efficiency η_{es}	%	37	33.4
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		43.6	40
05 Variable speed drive		No	

Data definition with optimum efficiency.

The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_e	kW	0.89
09 Air flow q_v	m ³ /h	14240
09 Pressure increase p_{fs}	Pa	84
10 Speed (rpm) n	min ⁻¹	680
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-202582



AC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Technical features

Mass	51 kg
Size	910 mm
Motor size	138
Surface of rotor	Cast in aluminium
Material of terminal box	Die-cast aluminium, coated in black
Material of blades	Aluminium sheet insert (coated in black), sprayed with PP plastic
Material of wall ring	Sheet steel, galvanised and plastic-coated in white aluminium (RAL 9006)
Material of guard grille	Steel, coated in white aluminium plastic (RAL 9006)
Number of blades	5
Blade angle	-5°
Direction of air flow	A
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP55
Insulation class	"F"
Humidity (F) / environmental protection class (H)	H2+T
Note ambient temperature	Occasional start-up between -40 °C and -25 °C is permissible. For continuous operation at ambient temperatures below -25 °C (e.g. refrigeration applications), a fan version with special low-temperature bearings must be used.
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	On the stator side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	≤ 3.5 mA
Electrical connection	Terminal box
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2010)
Approval	CSA C22.2 no. 100; EAC; UL 1004-1




AC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Product drawing

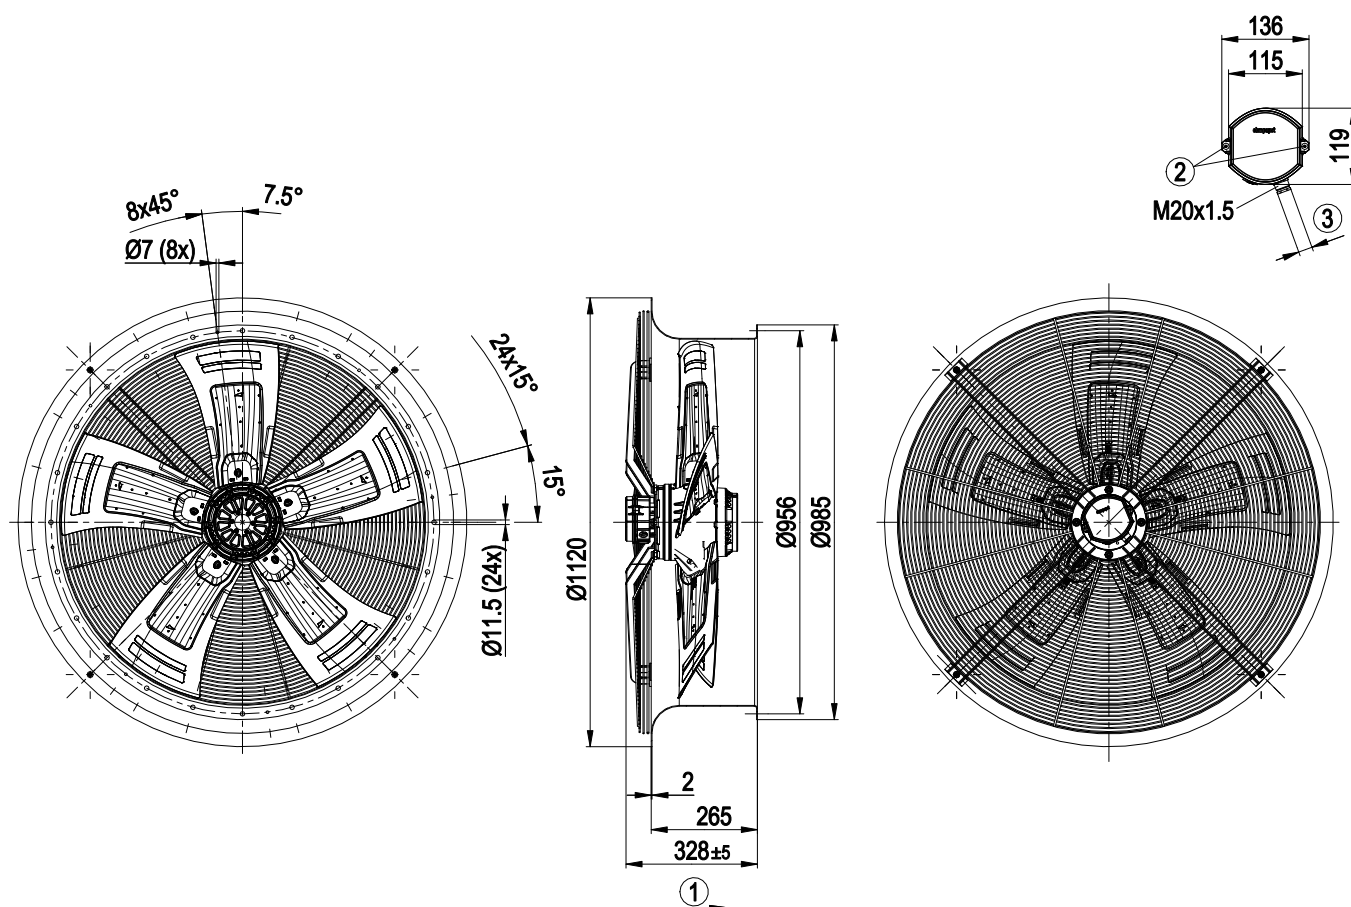


1	Direction of air flow "A"
2	Tightening torque 2.5±0.4 Nm
3	Cable diameter min. 10 mm, max. 12 mm, tightening torque 4±0.6 Nm

AC axial fan - HyBlade

sickled blades (S series)
with full round nozzle, Transformator fan

Connection screen

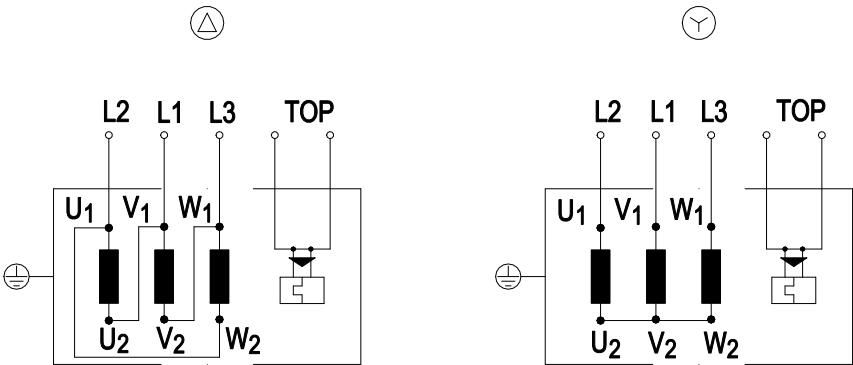

Change direction of rotation by reversing two phases


Δ	Delta connection	Y	Star connection	L2	= U1 = black
L1	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2x grey
PE	green/yellow				



AC axial fan - HyBlade

sickled blades (S series)
with full round nozzle, Transformator fan

Charts: Air flow 50 Hz

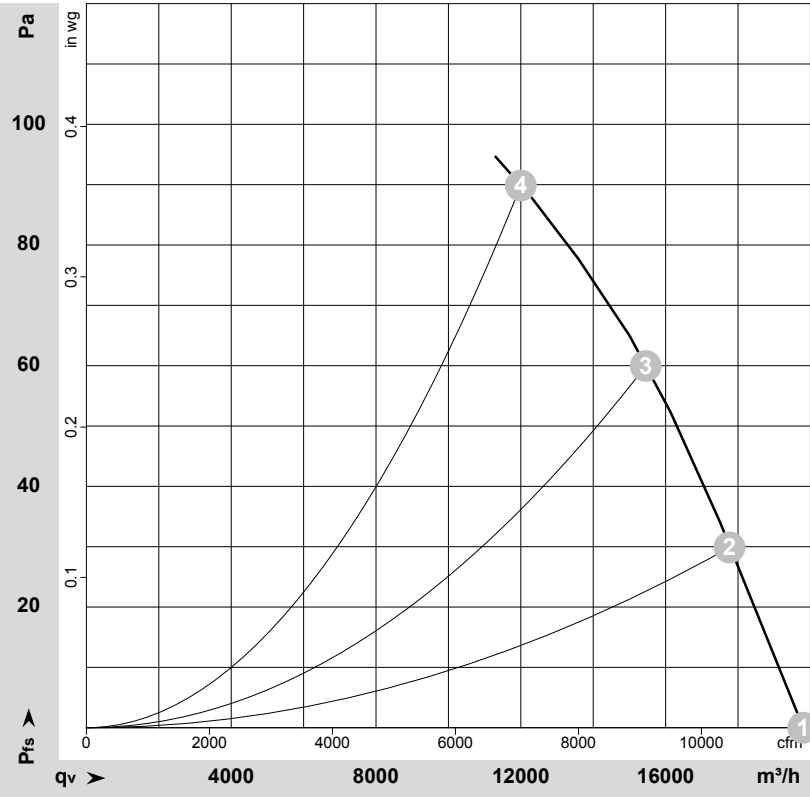

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-173657-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	Y	400	50	700	680	2.20	67	74	73	19805	0	11655	0.00
2	Y	400	50	690	773	2.28	66	72	72	17765	30	10455	0.12
3	Y	400	50	680	851	2.34	66	71	71	15450	60	9095	0.24
4	Y	400	50	675	917	2.41	71	77	77	12000	90	7060	0.36

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase




AC axial fan - HyBlade

sickled blades (S series)

with full round nozzle, Transformator fan

Charts: Air flow 60 Hz

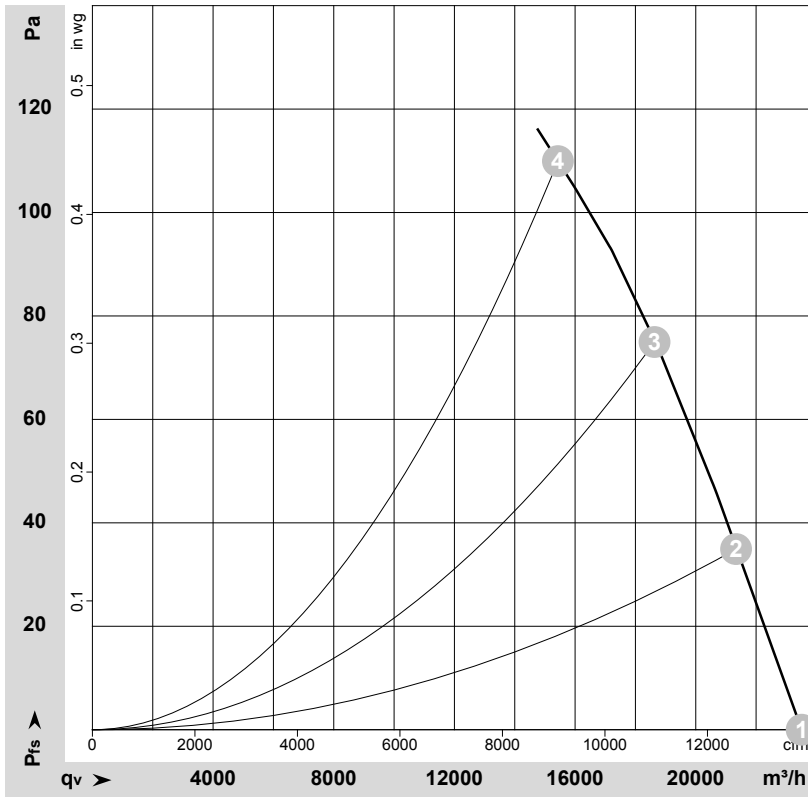

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-173724-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	Y	480	60	820	1070	2.40	72	79	78	23510	0	13840	0.00
2	Y	480	60	815	1193	2.56	70	77	77	21335	35	12560	0.14
3	Y	480	60	800	1323	2.69	70	76	75	18635	75	10970	0.30
4	Y	480	60	785	1424	2.79	72	77	77	15430	110	9080	0.44

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side
 LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

