

8300100740
VBS0355CSPFS

EC centrifugal fan - RadiPac

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100740	
Motor	E09002-28	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2140
Power consumption	W	490
Current draw	A	2.2
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	69.1	48.3	09 Power consumption P_{ed}	kW	0.49
02 Measurement category		A		09 Air flow q_v	m ³ /h	2805
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	394
04 Efficiency grade N		82.8	62	10 Speed (rpm) n	min ⁻¹	2140
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$


LU-223773

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

Technical description


Weight	5.26 kg
Size	355 mm
Motor size	90
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display with LED - Locked-rotor detection - Speed control - External 15-30 VDC input (parameterization) - Alarm relay - Configurable inputs/outputs (I/O) - Power limiter - MODBUS - Motor current limitation - PFC, active - RS-485 MODBUS-RTU - Soft start - Control interface with SELV potential safely disconnected from the mains - Temperature derating - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Lateral
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 61800-5-1; UKCA; CE
Approval	UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1

Product drawing

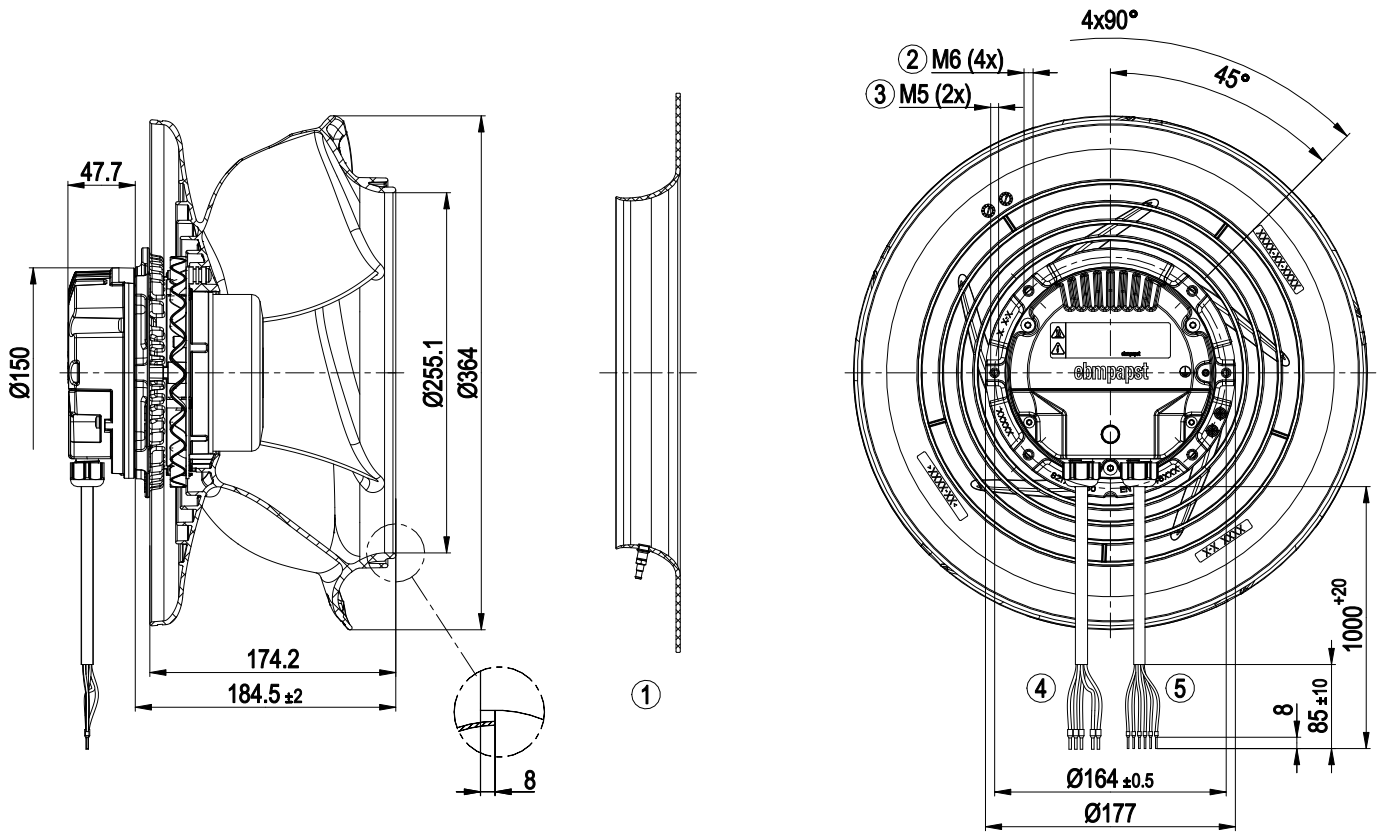

1	Accessory part: Inlet ring 8217102240 with pressure tap (k-factor: 145) (not included in scope of delivery)
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 10 mm
	The M5 tapped holes (2x) can be used to attach hoisting equipment.
4	Supply line (PWR) PVC AWG18
	5x wire-end ferrule
5	Control wire (CTRL) PVC AWG22
	6x wire-end ferrule

Accessory part

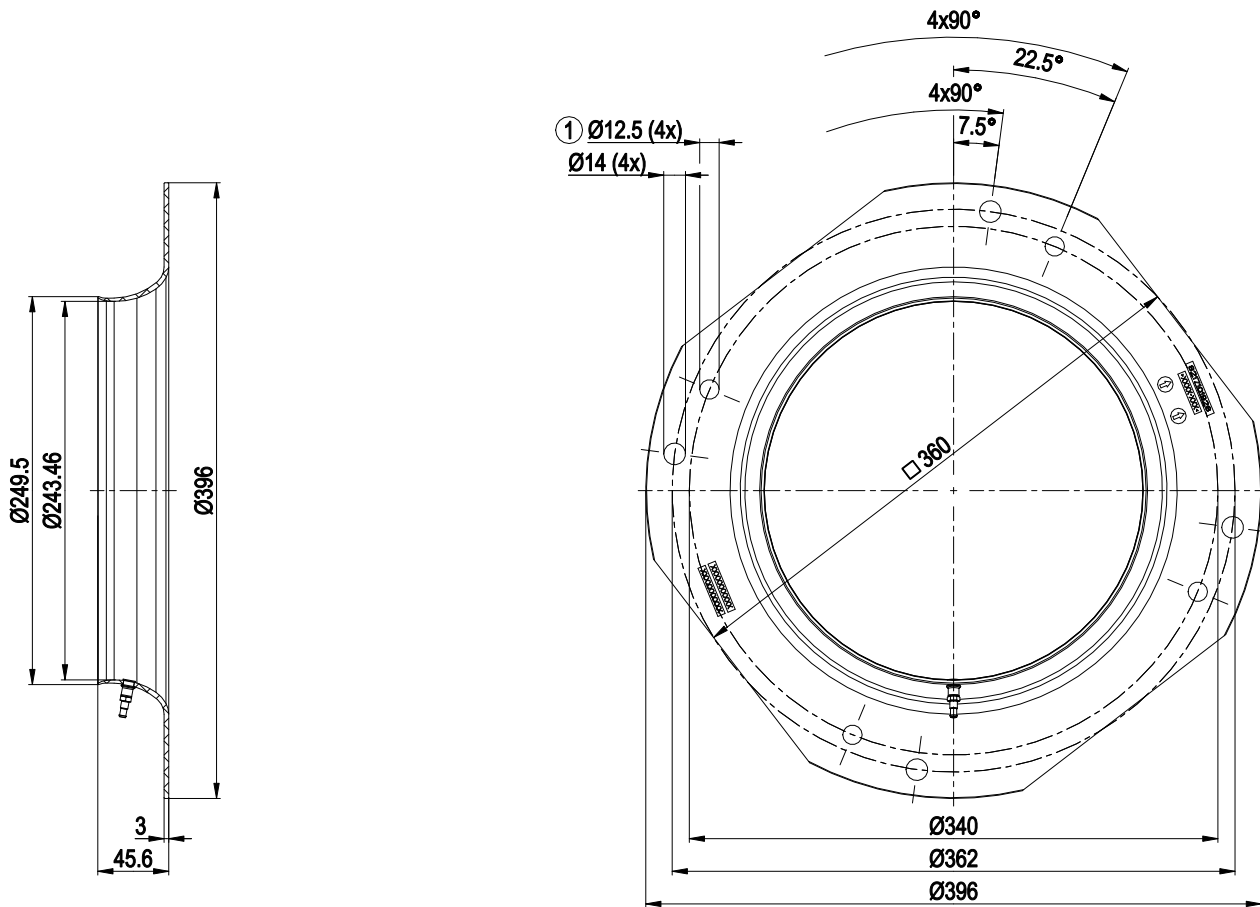


- | | |
|---|--|
| 1 | Fastening holes for FlowGrid 00400-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required |
| | Inlet ring 8217102240 with pressure tap (k-factor: 145) |

EC centrifugal fan - RadiPac

backward-curved, single-intake

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	PE	green/yellow	Protective earth
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	COM	orange	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	PWR	NC	orange	Status relay, floating status contact, break for failure
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV alternative: 15-30 VDC input for parameterization via MODBUS without line voltage
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V / PWM, R _i =100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable (see table Optional interface functions)
	CTRL	IO2	white	Factory setting: Open collector output, U _{max} =50 VDC, I _{max} =20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable (see table Optional interface functions)
	CTRL	RSA	gray	RS-485 interface for MODBUS RSA, SELV dielectric strength to MODBUS RSB +/-14 V, dielectric strength to GND +/-7 V
	CTRL	RSB	brown	RS-485 interface for MODBUS RSB, SELV dielectric strength to MODBUS RSA +/-14 V, dielectric strength to GND +/-7 V
		LED		green: status = good, ready for operation orange: status = warning red: status = failure

Terminal/plug assignment


IO1	IO2	IO mode configuration	electrical specification	configurable IO mode	MODBUS Register for IO mode configuration	configurable IO functions: normal / inverse											
						MODBUS Register for IO mode configuration											
IO1	IO2	Din1 (high active); digital input	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D158 [0]	D158 [0]	source: set value											
						source: sensor value											
						switch: parameter set: #1 / #2											
						switch: control function: heating (pos.) / cooling (neg.)											
IO2	IO2	Din1 (low active); digital input	active: applied voltage < 1.5 VDC not active: pin open or applied voltage 3.5 - 50 VDC, SELV	D158 [1]	D158 [1]	switch: direction of rotation: cw / ccw											
						switch: set value source											
						switch: fan enable / disable											
						source: input pulses autoaddressing											
IO2	IO2	Ain1 0-10 V/PWM; analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1\text{ k} - 10\text{ kHz}$, SELV	D158 [2]	D158 [2]	signal: tach out											
						signal: diagnostics out											
						signal: alarm out											
						signal: output pulses autoaddressing											
IO2	IO2	Ain1 0-10 V/PWM (with pull up); analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1\text{ k} - 10\text{ kHz}$, SELV	D158 [3]	D158 [3]	signal: DCI in											
						source: DCI in											
						switch: fan enable / disable											
						switch: set value source											
IO2	IO2	Din1 (active high); digital input	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	D159 [0]	D159 [0]	signal: tach out											
						signal: diagnostics out											
						signal: alarm out											
						signal: output pulses autoaddressing											
IO2	IO2	Ain1 0-10 V/PWM; analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1\text{ k} - 10\text{ kHz}$, SELV	D159 [2]	D159 [2]	signal: DCI in											
						source: DCI in											
						switch: fan enable / disable											
						switch: set value source											
IO2	IO2	Tach out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [5]	D159 [5]	signal: tach out											
						signal: diagnostics out											
						signal: alarm out											
						signal: output pulses autoaddressing											
IO2	IO2	Diagnostics out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [6]	D159 [6]	signal: tach out											
						signal: diagnostics out											
						signal: alarm out											
						signal: output pulses autoaddressing											
IO2	IO2	Alarm out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [10]	D159 [10]	signal: tach out											
						signal: diagnostics out											
						signal: alarm out											
						signal: output pulses autoaddressing											
IO2	IO2	Autoaddressing pulse output (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [11]	D159 [11]	signal: tach out											
						signal: diagnostics out											
						signal: alarm out											
						signal: output pulses autoaddressing											
IO2	IO2	DCI-output (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV	D159 [12]	D159 [12]	signal: tach out											
						signal: diagnostics out											
						signal: alarm out											
						signal: output pulses autoaddressing											
IO2	IO2	RS485 bus connection	MODBUS RTU, parameter specification V7.1, SELV			signal: tach out											
						signal: diagnostics out											
						signal: alarm out											
						signal: output pulses autoaddressing											
IO2	IO2	Relay	250 VAC / 2 A (AC1)			signal: tach out											
						signal: diagnostics out											
						signal: alarm out											
						signal: output pulses autoaddressing											
IO2	IO2	Voltage output	Voltage 10 VDC, SELV			signal: tach out											
						signal: diagnostics out											
						signal: alarm out											
						signal: output pulses autoaddressing											
IO2	IO2	Vout	15 - 30 VDC			signal: tach out											
						signal: diagnostics out											
						signal: alarm out											
						signal: output pulses autoaddressing											

Medium (M2)

Functions and parameter description
MODBUS V7.1

- configurable function
- function to be activated via IO Mode

Curves: Air performance 50 Hz

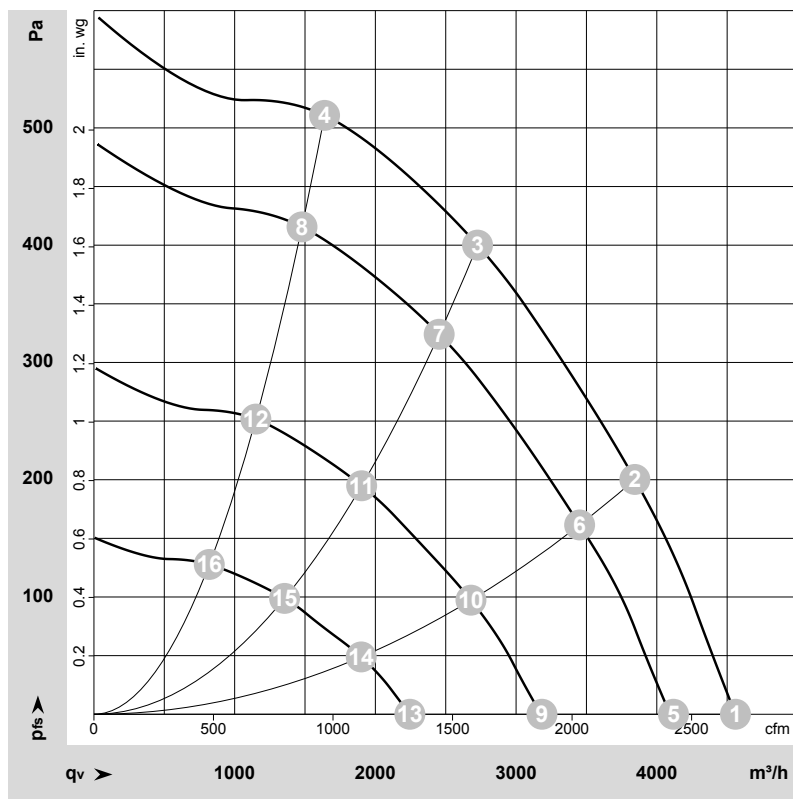

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-223773-1
Date: 2022-11-04
Nozzle: 8217101928

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _V	P _{fs}	q _V	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	2140	337	1.51	72	80	84	85	4560	0	2685	0.00
2	1~	230	50	2140	416	1.86	66	74	78	79	3845	200	2260	0.80
3	1~	230	50	2140	490	2.20	62	70	76	77	2725	400	1605	1.61
4	1~	230	50	2140	454	2.02	66	73	78	79	1640	510	965	2.05
5	1~	230	50	1930	253	1.15	70	78	81	83	4120	0	2425	0.00
6	1~	230	50	1930	307	1.38	63	71	75	77	3450	162	2030	0.65
7	1~	230	50	1930	360	1.61	60	67	73	74	2455	327	1445	1.31
8	1~	230	50	1930	334	1.50	63	70	75	76	1480	416	870	1.67
9	1~	230	50	1500	128	0.61	64	72	76	77	3185	0	1875	0.00
10	1~	230	50	1500	155	0.72	57	65	70	71	2680	98	1575	0.39
11	1~	230	50	1500	176	0.80	54	62	67	68	1905	196	1120	0.79
12	1~	230	50	1500	165	0.76	56	63	68	70	1150	252	675	1.01
13	1~	230	50	1070	55	0.33	57	64	69	70	2245	0	1320	0.00
14	1~	230	50	1070	65	0.36	50	57	62	63	1900	49	1120	0.20
15	1~	230	50	1070	72	0.39	46	53	59	60	1355	100	800	0.40
16	1~	230	50	1070	68	0.38	46	54	59	60	820	128	485	0.51

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_V = Air flow · P_{fs} = Pressure increase