

8300100770
VMA0630CSPLS

EC axial panel fan - AxiEco

with guard grille

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100770	
Motor	E09002-55	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	860
Power consumption	W	390
Current draw	A	1.75
Max. back pressure	Pa	145
Max. back pressure	in. wg	0.58
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	49.2	30.9	09 Power consumption P_{ed}	kW	0.37
02 Measurement category		A		09 Air flow q_v	m ³ /h	5550
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	106
04 Efficiency grade N		58.3	40	10 Speed (rpm) n	min ⁻¹	860
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$

LU-220741

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300100770
VMA0630CSPLS


EC axial panel fan - AxiEco

with guard grille

Technical description

Size	630 mm
Motor size	90
Rotor surface	Painted black
Terminal box material	PA plastic
Electronics housing material	Die-cast aluminum, painted gray
Impeller material	PP plastic, PP ring plastic
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Locked-rotor detection - Speed control - Alarm relay - Power limiter - Motor current limitation - PFC, active - Soft start - Control interface with SELV potential safely disconnected from the mains - Temperature derating - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

Product drawing

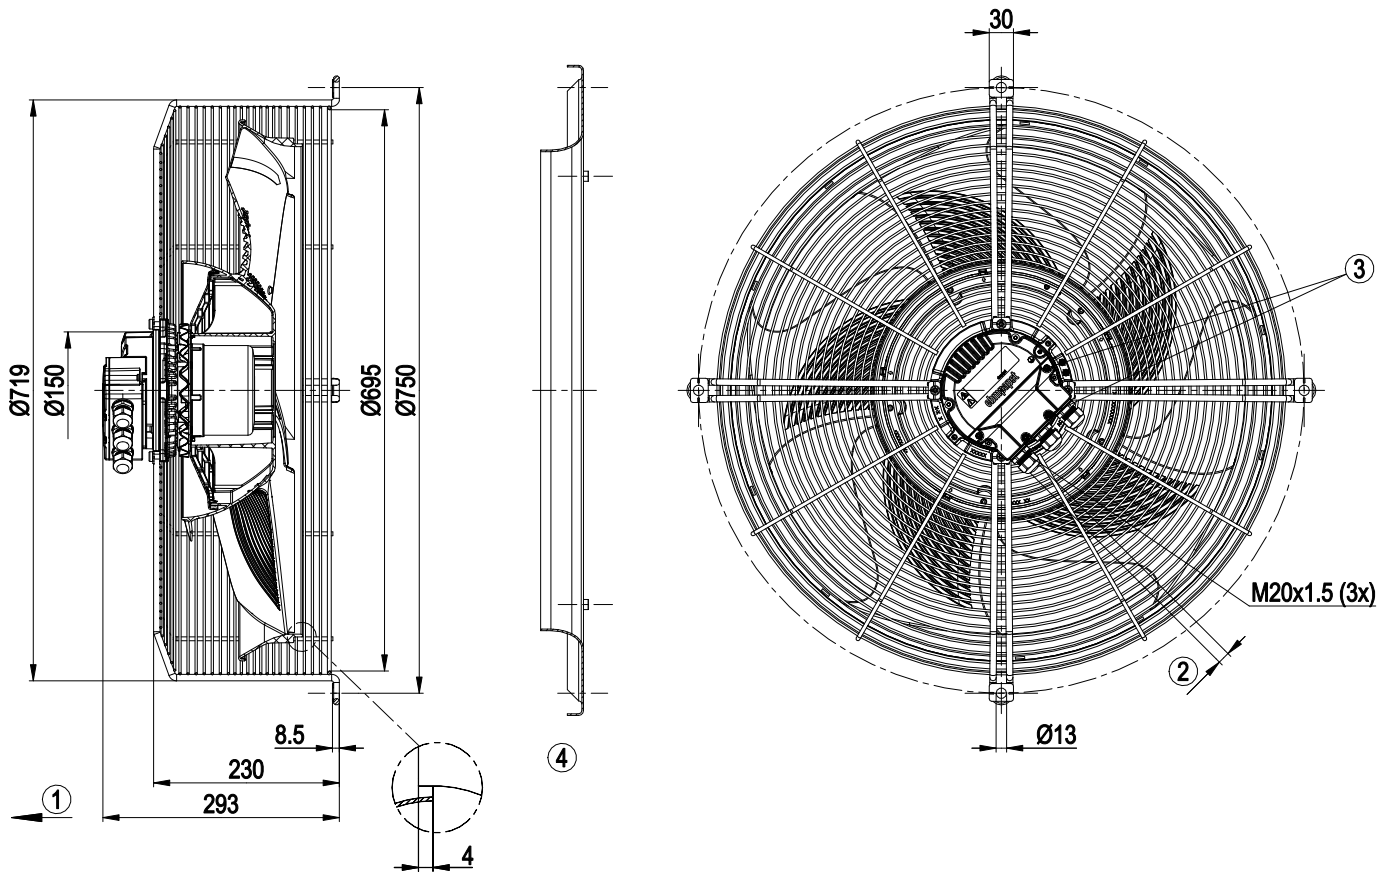


1	Airflow direction "V"
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
3	Tightening torque 2 ± 0.3 Nm
4	Accessory part: Inlet ring 60630-2-4013 not included in scope of delivery

8300100770
VMA0630CSPLS

EC axial panel fan - AxiEco

with guard grille

Accessory part

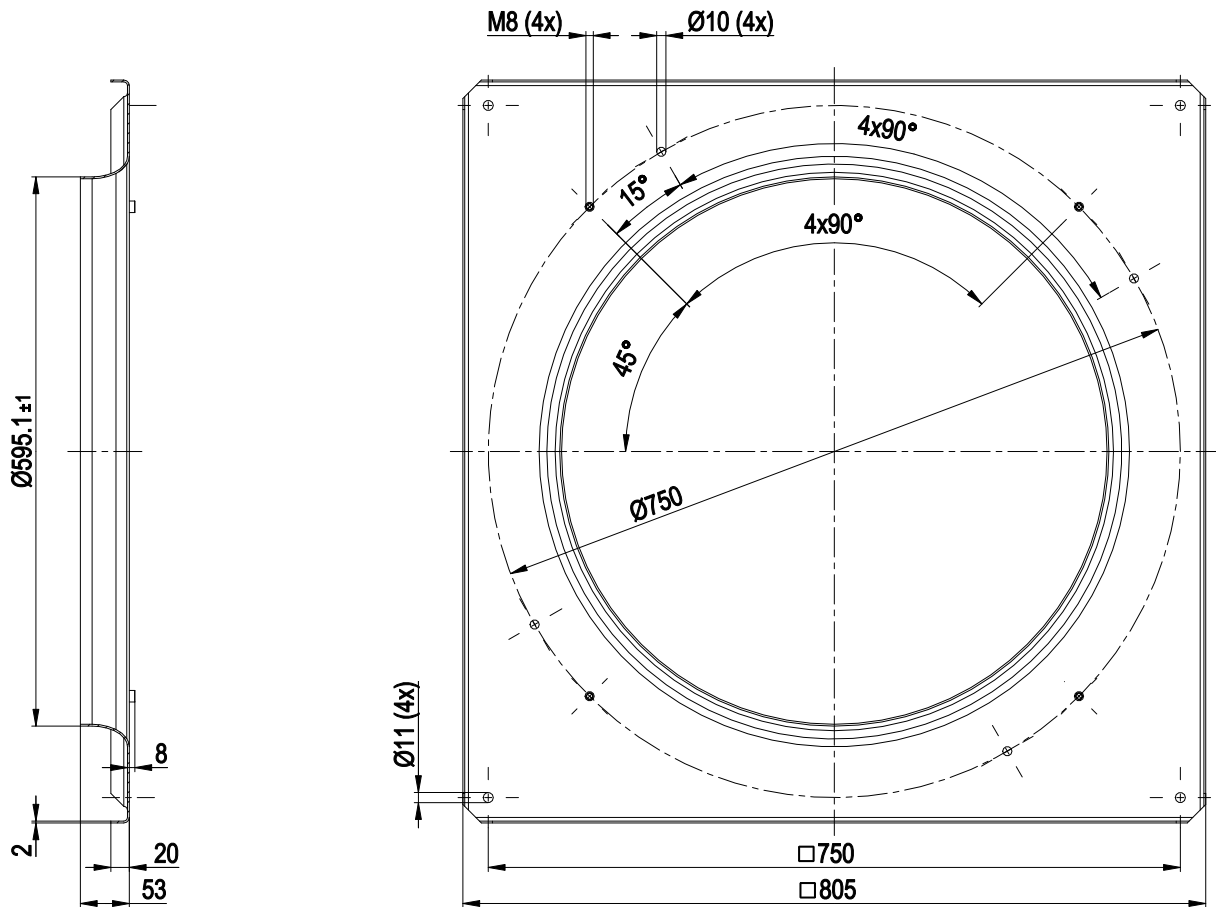


Inlet ring 60630-2-4013

EC axial panel fan - AxiEco

with guard grille

Connection diagram

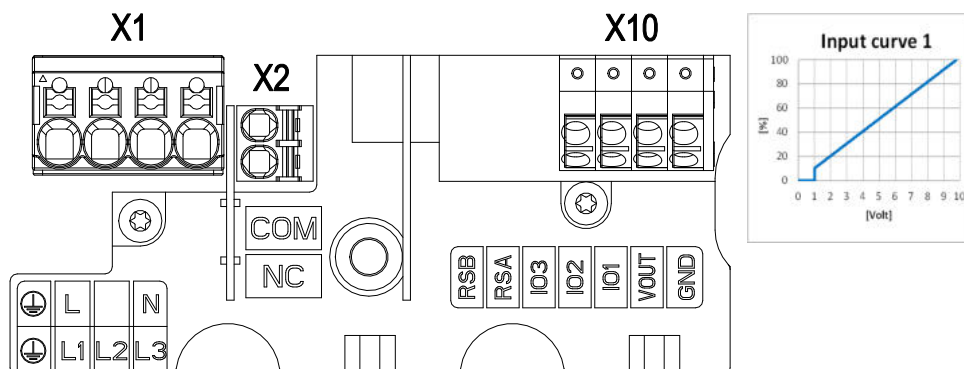

No.	Conn.	Designation	Function/assignment
X1	PWR	PE	Protective earth
X1	PWR	L	Power supply, phase, see nameplate for voltage range
X1	PWR	N	Power supply, neutral conductor, see nameplate for voltage range
X2	CTRL	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
X2	CTRL	NC	Status relay, floating status contact, break for failure
X10	CTRL	GND	Reference ground for control interface, SELV
X10	CTRL	Vout	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV
X10	CTRL	IO1	Factory setting: Analog input 0-10 V / PWM, R _i =100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable at the factory (see table Optional interface functions)
X10	CTRL	IO2	Factory setting: Open collector output, U _{max} =50 VDC, I _{max} =20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)

VMA0630CSPLS

with guard grille

[illegible]

Factory configuration option upon request

electrical specification

IO1	◦ Din1 (high active): digital input	active: parametrizable voltage x - 30 VDC not active: pin open or parametrizable voltage < x VDC, SELV Rt = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$, SELV
	◦ Ain1 0-10 V/PWM: analog input	
	◦ Tach out (open collector)	
	◦ Diagnostics out (open collector)	
IO2	◦ Alarm out (open collector)	Umax = 50 VDC, Imax = 20 mA, SELV
	◦ Open collector	Umax = 50 VDC, Imax = 20 mA, SELV
		Umax = 50 VDC, Imax = 20 mA, SELV
COM NC	Relais	250 VAC / 2 A (AC1)
Vout	Voltage output	Voltage 10 VDC, SELV


8300100770

VMA0630CSPLS

EC axial panel fan - AxiEco

with guard grille

Curves: Air performance 50 Hz

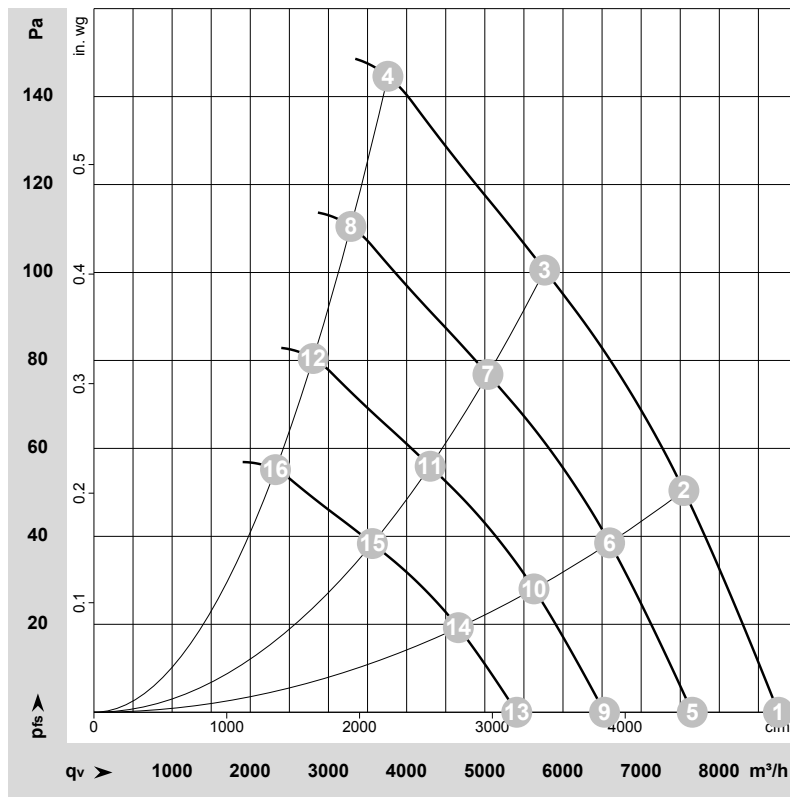

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-220741-1

Date: 2022-12-12

Nozzle: 60630-2-4013

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _V	P _{fs}	q _V	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m³/h	Pa	cfm	in. wg
1	1~	230	50	860	239	1.09	63	70	72	74	8755	0	5155	0.00
2	1~	230	50	860	307	1.39	60	67	69	71	7545	50	4440	0.20
3	1~	230	50	860	365	1.64	59	66	69	71	5765	100	3395	0.40
4	1~	230	50	860	390	1.75	62	69	72	74	3760	145	2215	0.58
5	1~	230	50	750	159	0.73	60	67	69	71	7655	0	4505	0.00
6	1~	230	50	750	205	0.93	56	63	66	68	6595	39	3885	0.16
7	1~	230	50	750	244	1.09	55	62	66	67	5040	77	2965	0.31
8	1~	230	50	750	261	1.17	59	66	69	71	3285	112	1935	0.45
9	1~	230	50	640	99	0.45	56	63	65	67	6530	0	3845	0.00
10	1~	230	50	640	128	0.58	52	59	62	64	5630	28	3315	0.11
11	1~	230	50	640	151	0.68	51	58	62	63	4300	56	2530	0.22
12	1~	230	50	640	162	0.73	55	62	65	67	2805	81	1650	0.33
13	1~	230	50	530	56	0.26	51	58	60	62	5410	0	3185	0.00
14	1~	230	50	530	72	0.33	47	54	57	59	4660	19	2745	0.08
15	1~	230	50	530	86	0.39	46	54	57	59	3560	38	2095	0.15
16	1~	230	50	530	92	0.41	50	57	60	62	2325	56	1365	0.22

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 LwA_{out} = Sound power level outlet side · q_V = Air flow · P_{fs} = Pressure increase