

8300101089
VVY0450CSNJS

EC axial panel fan - AxiEco

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101089	
Motor	E07433-43	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	950
Power consumption	W	170
Current draw	A	1.4
Max. back pressure	Pa	95
Max. back pressure	in. wg	0.38
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	50.3	28.8	09 Power consumption P_{ed}	kW	0.16
02 Measurement category		A		09 Air flow q_v	m³/h	3230
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	83
04 Efficiency grade N		61.5	40	10 Speed (rpm) n	min ⁻¹	990
05 Variable speed drive		Yes		11 Specific ratio*		1.00


Data obtained at optimum efficiency level.
The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$ LU-228969

Technical description


Size	450 mm
Motor size	74
Rotor surface	Galvanized
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic, galvanized sheet-metal plate
Number of blades	5
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 60034-1; EN 60204-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

Product drawing

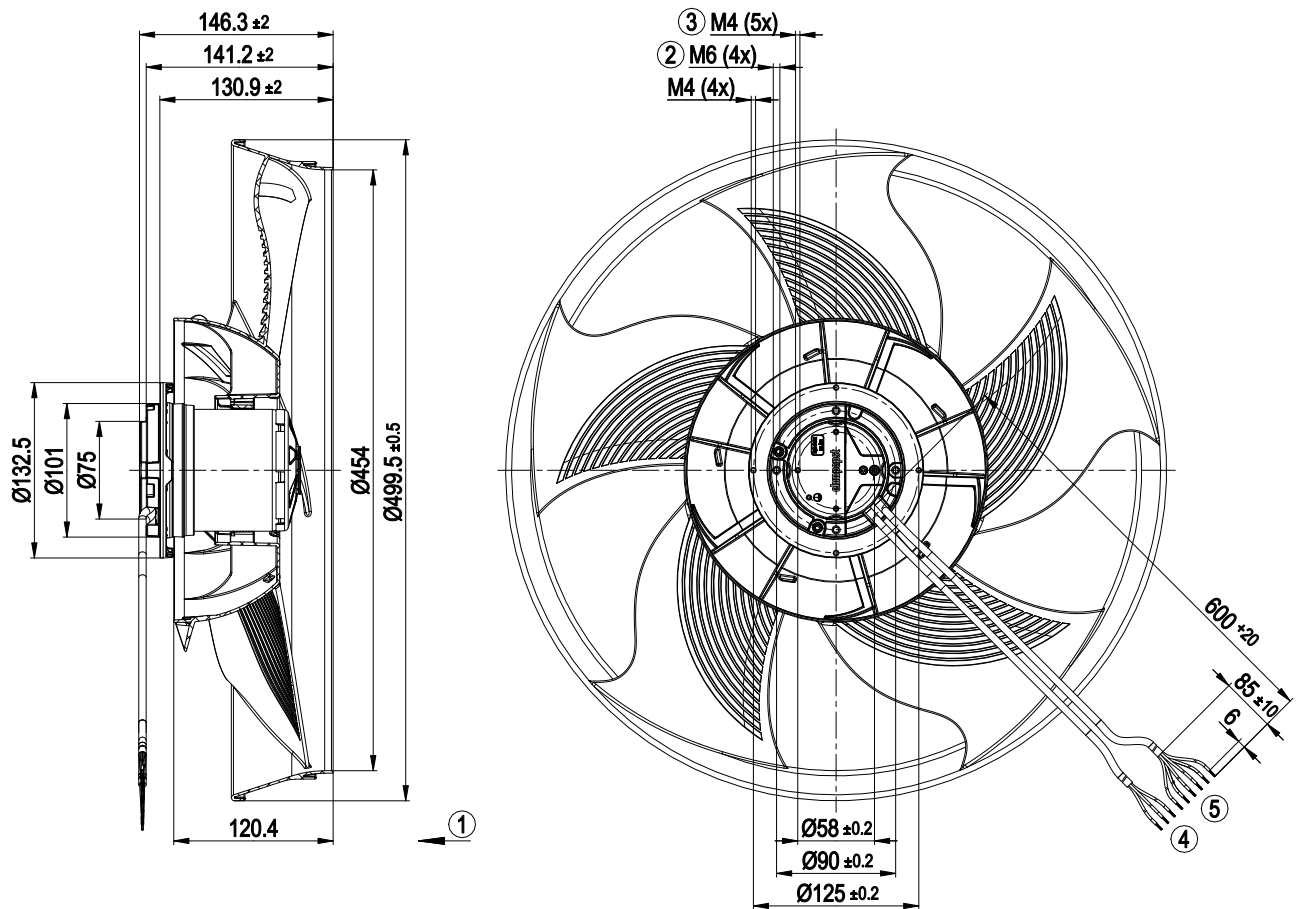

1	Airflow direction "V"
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 5 mm
4	Supply line (PWR) PVC AWG20 3x splice
5	Control wire (CTRL) PVC AWG22 6x splice

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=10 mA Short-circuit-proof, power supply for external devices, SELV
	CTRL	-	gray	No function
	CTRL	-	brown	No function


Terminal/plug assignment

	configurable IO mode	electrical specification	INPUT		OUTPUT					
			switch: parameter set: #1 / #2	switch: direction of rotation: cw / ccw	switch: enable/disable input	configurable function	signal: tach out	signal: diagnostics out	signal: alarm out	signal: run monitoring
IO1	Din1 (high active): digital input	active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV	○	○	○					signal: status
	Ain1 0-10 V/PWM: analog input	Ri = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1k..10 kHz, SELV	○		○					signal: configurable function
IO2	Tach out (open collector)	U _{max} =50 VDC, I _{max} =10 mA, SELV					○			
	Diagnostics out (open collector)	U _{max} =50 VDC, I _{max} =10 mA, SELV						○		
	Alarm out (open collector)	U _{max} =50 VDC, I _{max} =10 mA, SELV							○	
	Open collector	U _{max} =50 VDC, I _{max} =10 mA, SELV								○
Vout	Voltage output	Voltage 10 VDC, SELV								

Basic (B4)
Factory configuration option upon request

○ Factory configuration option

Curves: Air performance 50 Hz

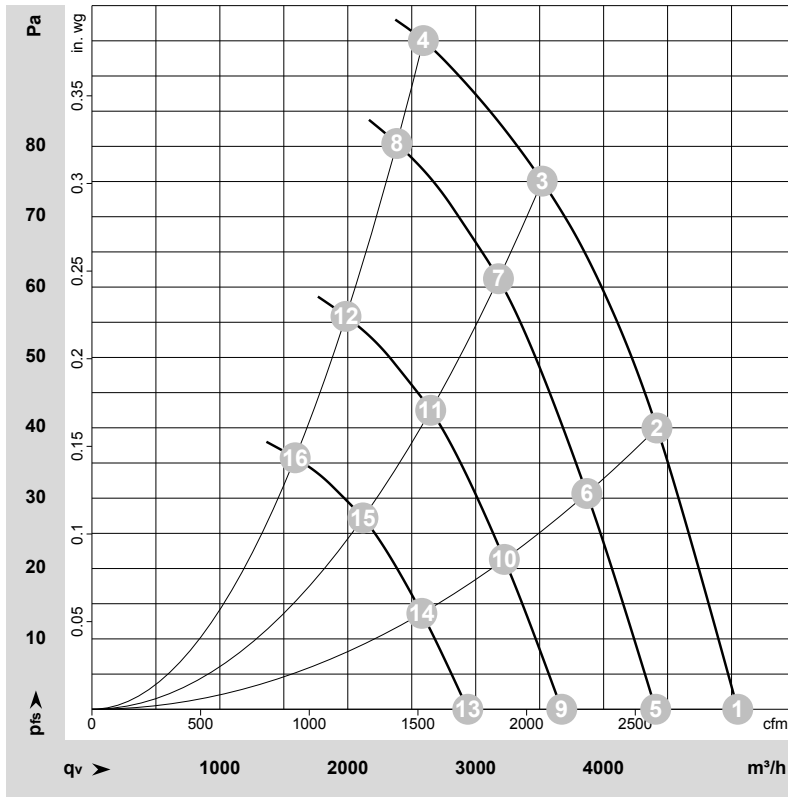

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-228969-1
Date: 2023-09-22
Housing: 45100-2-4013

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _V	P _{fs}	q _V	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	1025	128	1.09	61	68	70	72	5050	0	2970	0.00
2	1~	230	50	1025	157	1.32	58	64	67	69	4415	40	2600	0.16
3	1~	230	50	995	170	1.40	55	62	65	67	3520	75	2070	0.30
4	1~	230	50	950	170	1.40	55	63	67	68	2590	95	1525	0.38
5	1~	230	50	900	85	0.72	58	64	66	68	4405	0	2595	0.00
6	1~	230	50	900	106	0.89	54	61	63	65	3870	31	2275	0.12
7	1~	230	50	900	124	1.04	52	60	63	65	3180	61	1870	0.24
8	1~	230	50	900	131	1.10	53	61	64	66	2385	81	1405	0.33
9	1~	230	50	750	49	0.42	53	60	62	64	3675	0	2160	0.00
10	1~	230	50	750	61	0.51	50	56	59	61	3225	21	1900	0.08
11	1~	230	50	750	72	0.60	48	55	58	60	2650	43	1560	0.17
12	1~	230	50	750	76	0.63	49	56	60	61	1985	56	1170	0.22
13	1~	230	50	600	25	0.21	47	54	56	58	2940	0	1730	0.00
14	1~	230	50	600	31	0.26	44	51	53	55	2580	14	1520	0.06
15	1~	230	50	600	37	0.31	42	50	52	54	2120	27	1245	0.11
16	1~	230	50	600	39	0.33	43	51	54	56	1590	36	935	0.14

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_V = Air flow · P_{fs} = Pressure increase