

EC axial panel fan - AxiEco

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101326	
Motor	E07433-18	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1900
Power consumption	W	170
Current draw	A	1.4
Max. back pressure	Pa	185
Max. back pressure	in. wg	0.74
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	50.9	28.8	09 Power consumption P_{ed}	kW	0.16
02 Measurement category		A		09 Air flow q_v	m ³ /h	1910
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	143
04 Efficiency grade N		62.1	40	10 Speed (rpm) n	min ⁻¹	1960
05 Variable speed drive		Yes		11 Specific ratio*		1.00


Data obtained at optimum efficiency level.
The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$ LU-227734

Technical description

Size	300 mm
Motor size	74
Rotor surface	Galvanized
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	5
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60335-1; EN 60034-1; EN 60204-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1


Product drawing

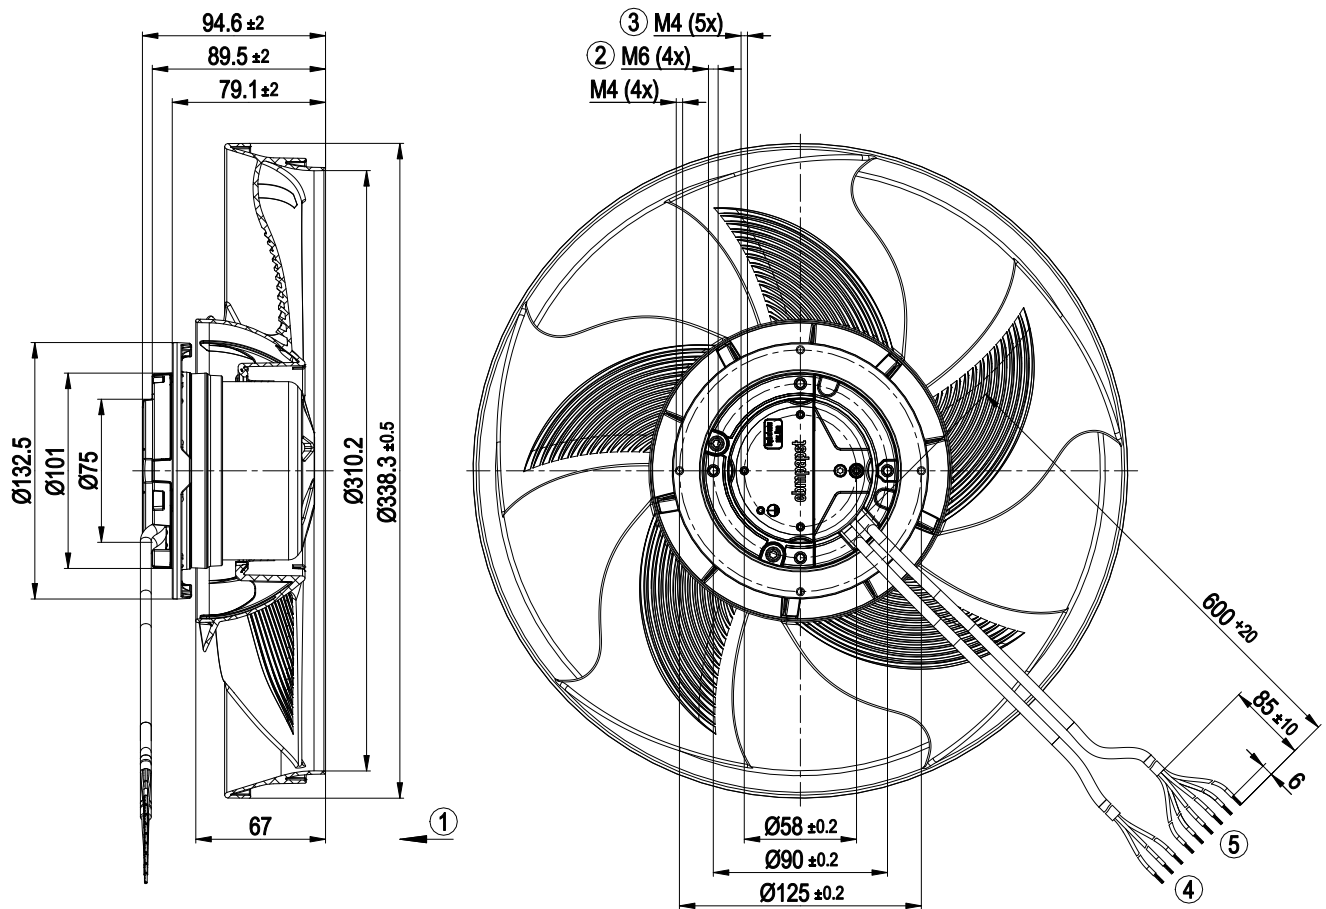

1	Airflow direction "V"
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 5 mm
4	Supply line (PWR) PVC AWG20 3x splice
5	Control wire (CTRL) PVC AWG22 6x splice

EC axial panel fan - AxiEco

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=10 mA Short-circuit-proof, power supply for external devices, SELV
	CTRL	-	gray	No function
	CTRL	-	brown	No function


8300101326
VVY0300CSNDS

EC axial panel fan - AxiEco

Terminal/plug assignment

Basic (B4)			
Factory configuration option upon request			
IO1	configurable IO mode	electrical specification	source: set value switch: parameter set: #1 / #2 switch: direction of rotation: cw / ccw switch: enable/disable input configurable function signal: tach out signal: diagnostics out signal: alarm out signal: run monitoring signal: status signal: configurable function INPUT OUTPUT
IO2	Din1 (high active): digital input ○	active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1k..10 kHz$, SELV	○
	Ain1 0-10 V/PWM: analog input ○	Umax=50 VDC, Imax=10 mA, SELV	○
	Tach out (open collector) ○	Umax=50 VDC, Imax=10 mA, SELV	○
	Diagnostics out (open collector) ○	Umax=50 VDC, Imax=10 mA, SELV	○
	Alarm out (open collector) ○	Umax=50 VDC, Imax=10 mA, SELV	○
Vout	Voltage output		
	Voltage 10 VDC, SELV		

Curves: Air performance 50 Hz

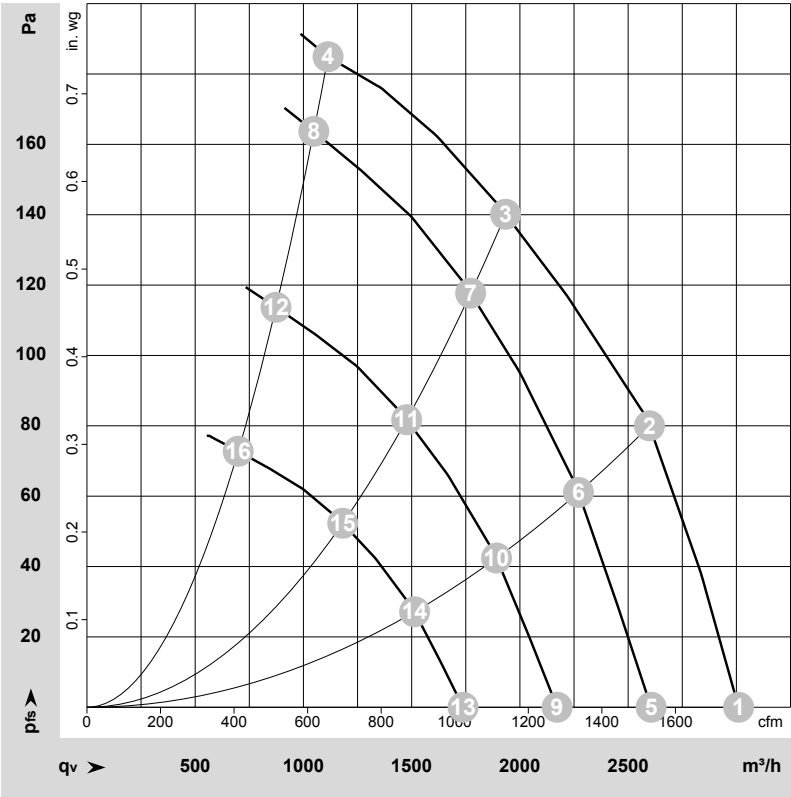

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-227734-1
Date: 2023-07-25
Nozzle: 30100-2-4013

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _V	p _{fs}	q _V	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	2080	138	1.18	67	73	3010	0	1770	0.00
2	1~	230	50	2060	169	1.42	64	70	2600	80	1530	0.32
3	1~	230	50	1965	169	1.42	60	67	1935	140	1140	0.56
4	1~	230	50	1915	169	1.42	64	71	1115	185	655	0.74
5	1~	230	50	1800	89	0.76	63	69	2605	0	1535	0.00
6	1~	230	50	1800	113	0.94	61	67	2270	61	1335	0.24
7	1~	230	50	1800	130	1.09	58	65	1770	118	1045	0.47
8	1~	230	50	1800	141	1.19	63	70	1050	164	615	0.66
9	1~	230	50	1500	52	0.44	59	65	2170	0	1280	0.00
10	1~	230	50	1500	65	0.55	56	62	1890	42	1115	0.17
11	1~	230	50	1500	75	0.63	53	60	1475	82	870	0.33
12	1~	230	50	1500	82	0.69	58	65	875	114	515	0.46
13	1~	230	50	1200	27	0.23	53	59	1740	0	1025	0.00
14	1~	230	50	1200	33	0.28	51	57	1515	27	890	0.11
15	1~	230	50	1200	39	0.32	48	54	1180	52	695	0.21
16	1~	230	50	1200	42	0.35	52	59	700	73	410	0.29

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_V = Air flow · p_{fs} = Pressure increase