

8300101534
VBH0250SSNDS

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101534	
Motor	E07433-18	

Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	2600
Power consumption	W	170
Current draw	A	1.4
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	66.5	43.5	09 Power consumption P_{ed}	kW	0.17
02 Measurement category		A		09 Air flow q_v	m³/h	1070
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	339
04 Efficiency grade N		85	62	10 Speed (rpm) n	min ⁻¹	2620
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-231606

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300101534

VBH0250SSNDS

EC centrifugal module - RadiCal

backward-curved, single-intake

with housing

Technical description


Size	250 mm
Motor size	74
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Housing material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

8300101534
VBH0250SSNDS

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

Product drawing

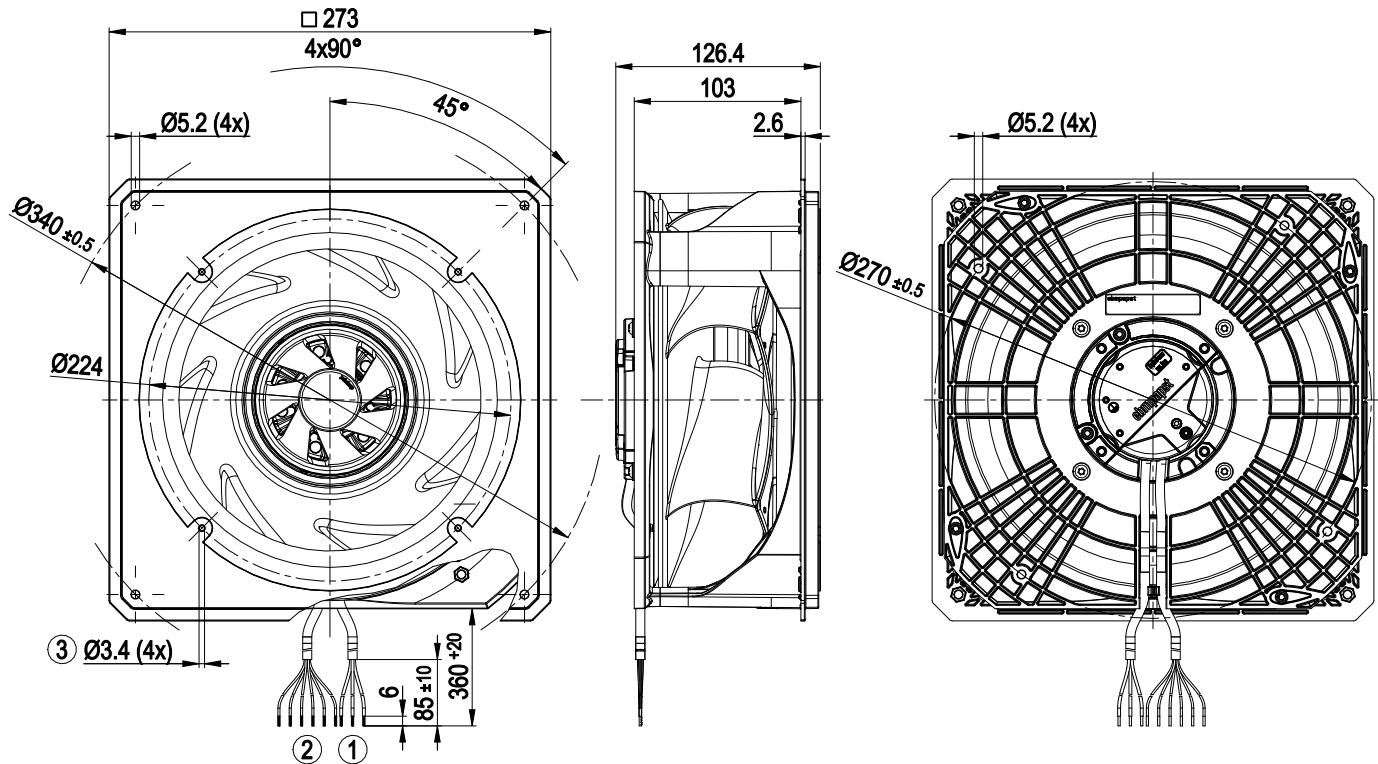


1	Supply line (PWR) PVC AWG20 3x splice
2	Control wire (CTRL) PVC AWG22 6x splice
3	Fastening holes for FlowGrid 8217118468 (not included in scope of delivery) are provided and must only be used for FlowGrid

8300101534
VBH0250SSNDS

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

Mounting dimensions

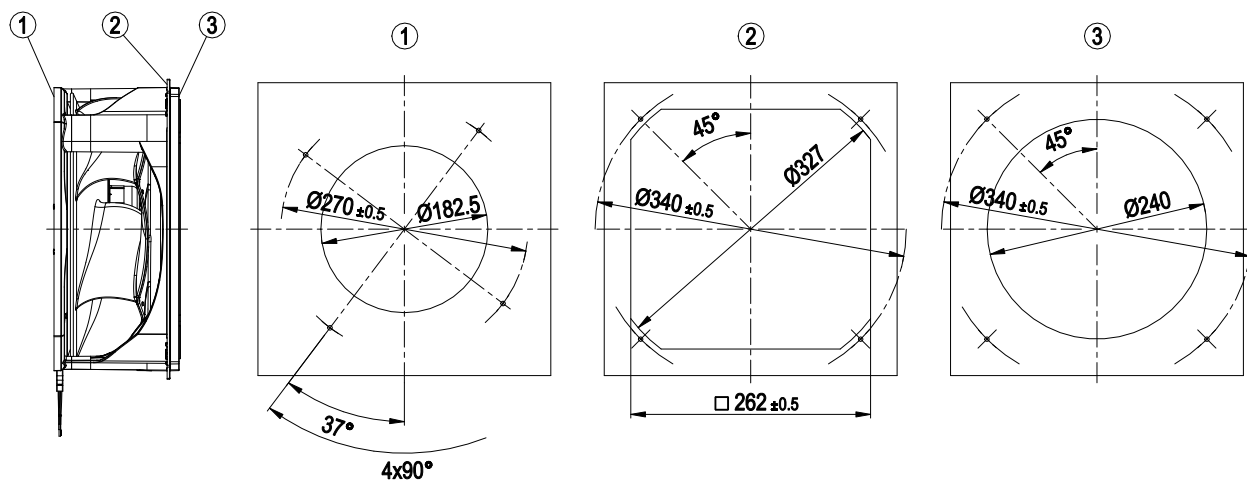

1	Installation of motor plate
2	Installation of nozzle plate on outlet side
3	Installation of nozzle plate on intake side

EC centrifugal module - RadiCal

backward-curved, single-intake
with housing

Connection diagram




No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=10 mA Short-circuit-proof, power supply for external devices, SELV
	CTRL	-	gray	No function
	CTRL	-	brown	No function

VBH0250SSNDS

backward-curved, single-intake
with housing

Basic (B4)									
Factory configuration option upon request									
factory configuration option									
IO1	configurable IO mode			electrical specification			INPUT		
	Dim1 (high active): digital input			active: parameterizable voltage x - 30 VDC not active: pin open or parameterizable voltage < x VDC, SELV Ri = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1\text{ k} - 10\text{ kHz}$, SELV			switch: parameter set: #1 / #2	switch: direction of rotation: cw / ccw	switch: enable/disable input
IO2	Tach out (open collector)			Umax = 50 VDC, Imax = 10 mA, SELV					
	Diagnostics out (open collector)			Umax = 50 VDC, Imax = 10 mA, SELV					
	Alarm out (open collector)			Umax = 50 VDC, Imax = 10 mA, SELV					
	Open collector			Umax = 50 VDC, Imax = 10 mA, SELV					
Voltage output				Voltage 10 VDC, SELV					
Vout									
IO1							source: set value	switch: parameter set: #1 / #2	switch: enable/disable input
								configurable function	signal: tach out
									signal: diagnostics out
									signal: alarm out
									signal: run monitoring
IO2									signal: status
									signal: configurable function

Curves: Air performance 50 Hz

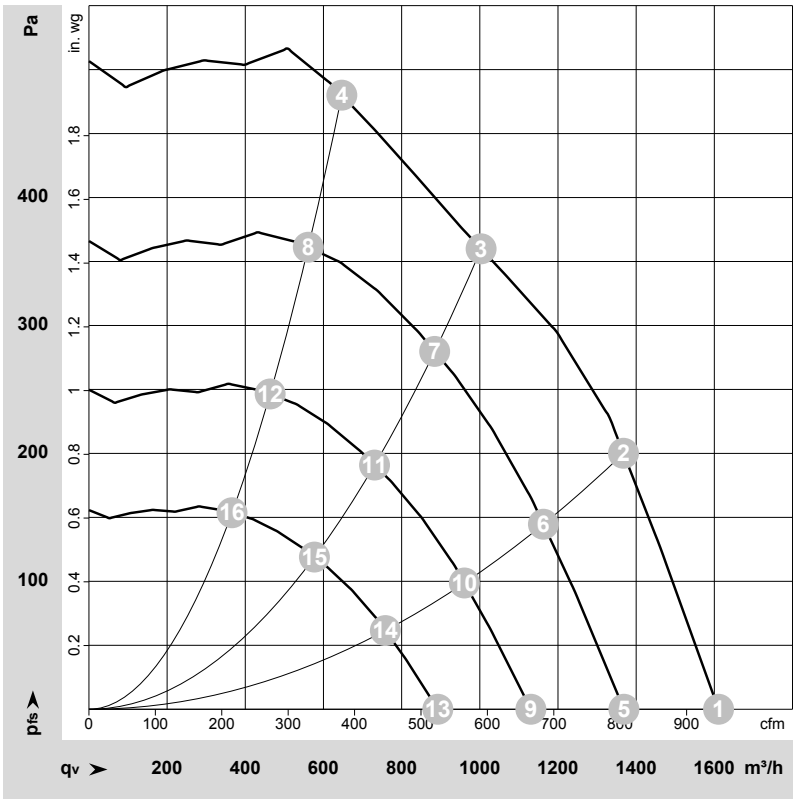

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-231606-1
Date: 2024-03-12
Nozzle: 8217118132

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	2705	123	1.05	67	74	1610	0	950	0.00
2	1~	230	50	2705	161	1.34	63	71	1370	200	805	0.80
3	1~	230	50	2610	172	1.42	60	68	1005	360	590	1.45
4	1~	230	50	2650	171	1.42	66	74	645	480	380	1.93
5	1~	230	50	2300	76	0.64	63	70	1370	0	805	0.00
6	1~	230	50	2300	99	0.82	59	67	1165	145	685	0.58
7	1~	230	50	2300	118	0.97	57	65	885	280	520	1.12
8	1~	230	50	2300	112	0.93	63	71	560	361	330	1.45
9	1~	230	50	1900	43	0.36	58	66	1130	0	665	0.00
10	1~	230	50	1900	56	0.46	54	62	960	99	565	0.40
11	1~	230	50	1900	66	0.55	52	60	730	191	430	0.77
12	1~	230	50	1900	63	0.52	58	66	465	246	275	0.99
13	1~	230	50	1500	21	0.18	52	60	895	0	525	0.00
14	1~	230	50	1500	28	0.23	48	56	760	62	445	0.25
15	1~	230	50	1500	33	0.27	46	54	575	119	340	0.48
16	1~	230	50	1500	31	0.26	52	60	365	154	215	0.62

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase