

EC centrifugal fan - RadiCal

backward-curved, single-intake

with housing (flange)

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	G3G225-RH19-01	
Motor	M3G055-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2450
Power consumption	W	105
Current draw	A	0.9
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC centrifugal fan - RadiCal

backward-curved, single-intake

with housing (flange)

Technical description


Weight	2.64 kg
Size	225 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	PA plastic
Housing material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE



EC centrifugal fan - RadiCal

backward-curved, single-intake
with housing (flange)

Product drawing

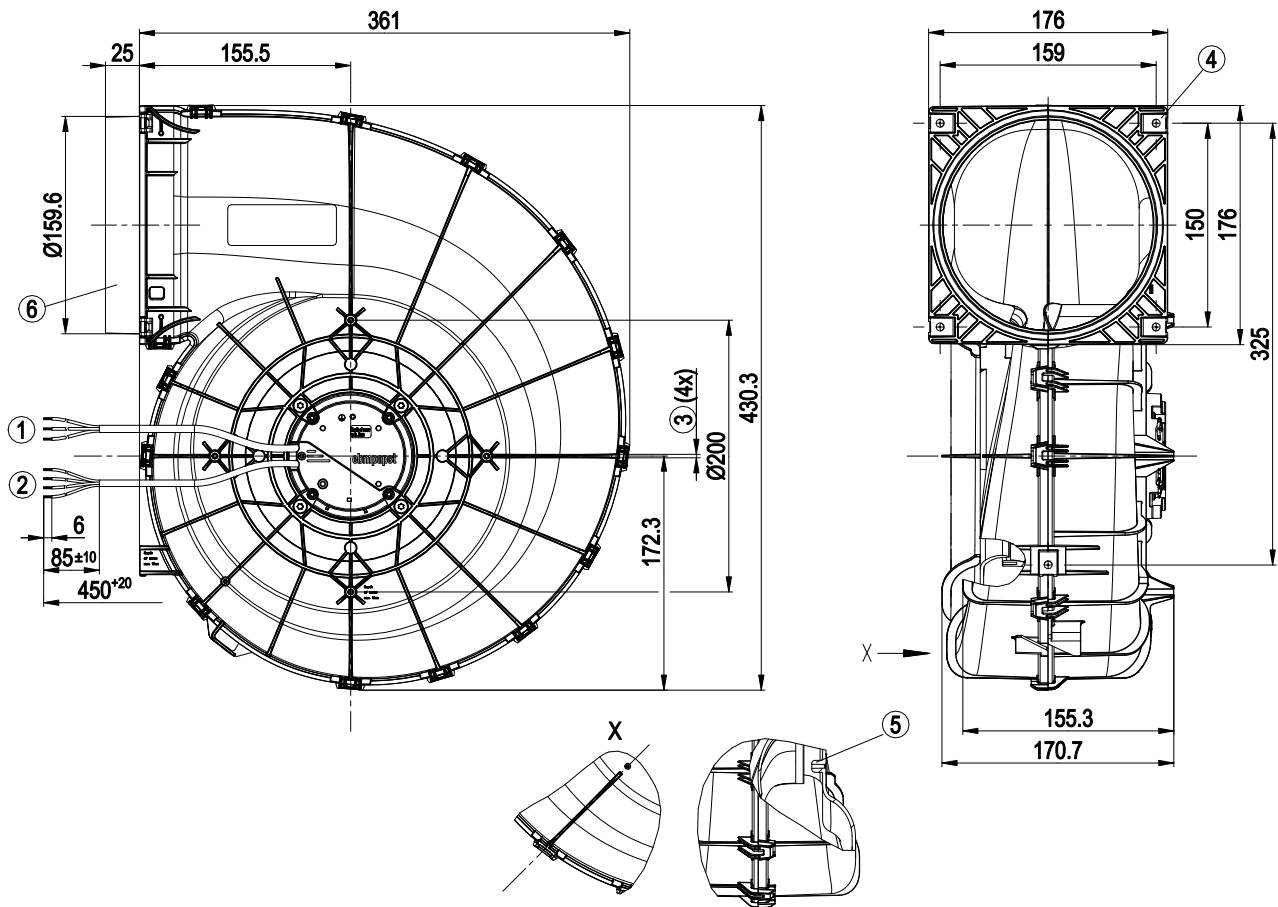


1	Cable PVC 3G 0.5 mm²
	3x splice
2	Cable PVC 4x 0.25 mm²
	4x splice
3	Tapping hole prepared for self-tapping screw for fastening plastics (Remform) dia. 4 mm, screw-in depth max. 15 mm, torque is to be determined on the basis of the screw.
4	5x sheet metal nut for thread EN ISO 1478-ST4.8 (max. screw length 16 mm plus thickness of mounting material)
5	Screw-on domes are only permissible for Flowgrid!
6	Connecting sleeve not suitable for installation with pipe clamps

EC centrifugal fan - RadiCal

backward-curved, single-intake

with housing (flange)

Connection diagram

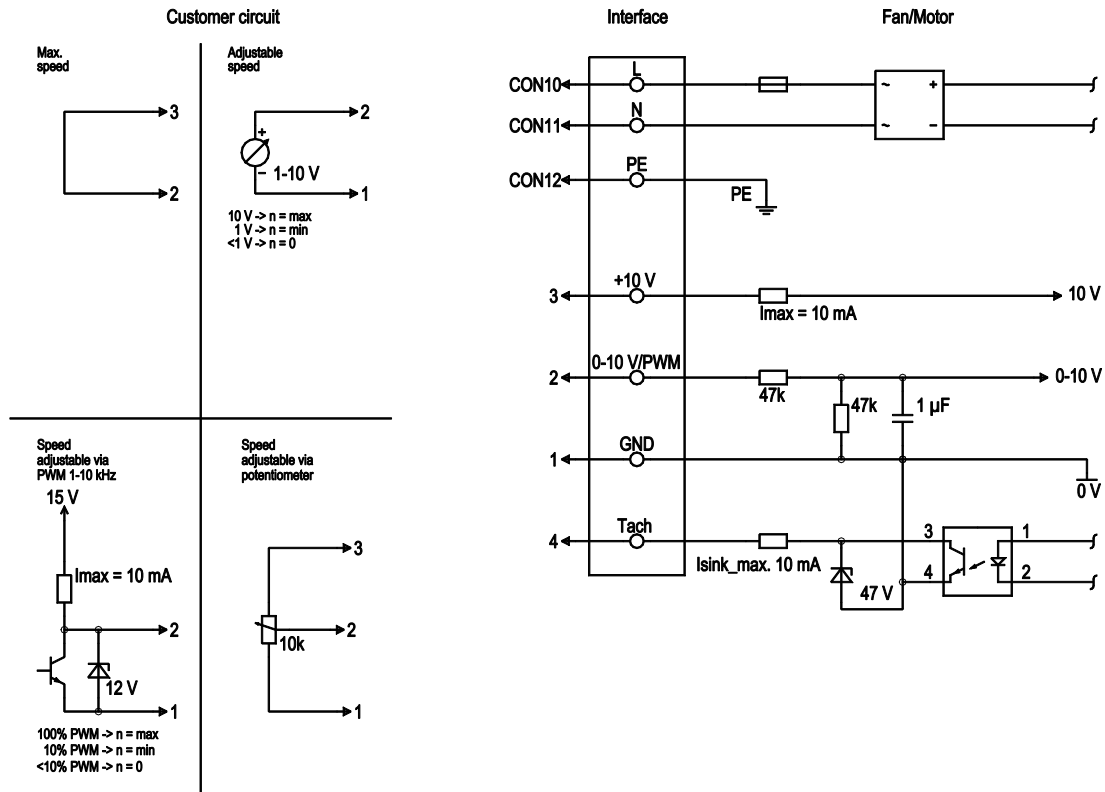


No.	Conn.	Designation	Color	Function/assignment
	CON10	L	brown	Supply connection, power supply, phase, see nameplate for voltage range
	CON11	N	blue	Supply connection, power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Ground connection
	2	0- 10V PWM	yellow	0-10 V / PWM control input, R _i =100 kΩ, SELV
	4	Tach	white	Tach output, open collector, 1 pulse per revolution, I _{sink max} = 10 mA, SELV
	3	+10 V	red	Fixed voltage output 10 VDC +/-3 %, I _{max} . 10 mA, short-circuit-proof, power supply for ext. devices (e.g. pot), SELV
	1	GND	blue	Reference ground for control interface, SELV



EC centrifugal fan - RadiCal

backward-curved, single-intake
with housing (flange)

Curves: Air performance 50 Hz

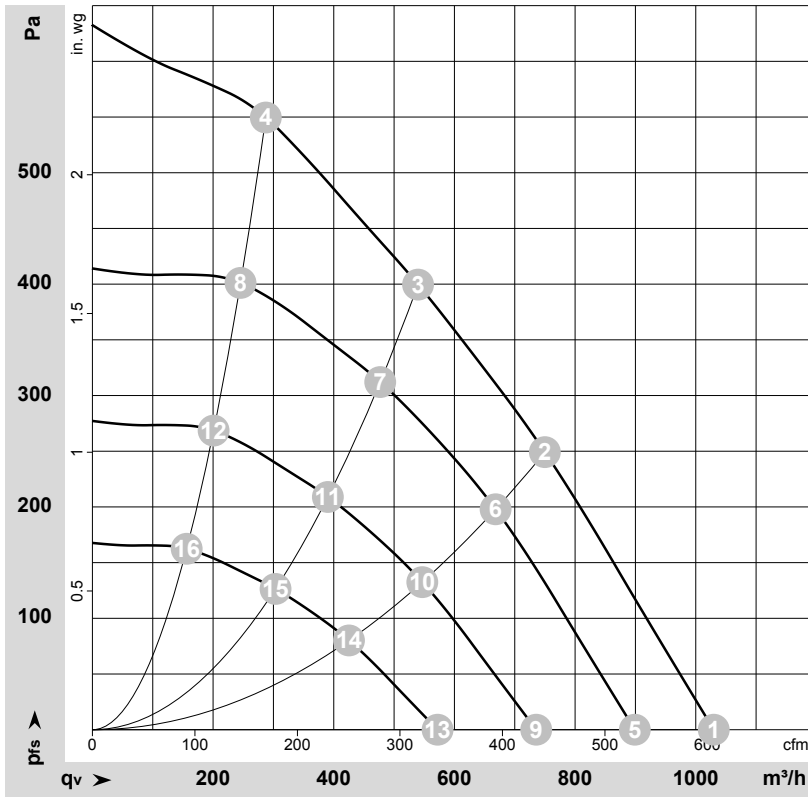

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-189359-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	2520	98	0.83	71	75	1030	0	605	0.00
2	1~	230	50	2450	105	0.90	68	71	750	250	440	1.00
3	1~	230	50	2490	103	0.87	64	69	540	400	320	1.61
4	1~	230	50	2575	88	0.76	69	73	285	550	170	2.21
5	1~	230	50	2200	65	0.55	67	71	900	0	530	0.00
6	1~	230	50	2200	75	0.63	65	68	670	198	395	0.79
7	1~	230	50	2200	71	0.60	61	66	475	313	280	1.26
8	1~	230	50	2200	55	0.47	66	71	245	402	145	1.61
9	1~	230	50	1800	36	0.30	62	66	735	0	435	0.00
10	1~	230	50	1800	41	0.35	60	63	545	133	320	0.53
11	1~	230	50	1800	39	0.33	56	61	390	210	230	0.84
12	1~	230	50	1800	30	0.26	61	66	200	269	120	1.08
13	1~	230	50	1400	17	0.14	56	60	570	0	335	0.00
14	1~	230	50	1400	19	0.16	53	57	425	80	250	0.32
15	1~	230	50	1400	18	0.15	50	55	305	127	180	0.51
16	1~	230	50	1400	14	0.12	55	59	155	163	90	0.65

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

