

EC centrifugal module - RadiCal

backward-curved, single-intake

with housing

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	K1G175-RF04-01	
Motor	M1G055-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	4050
Power consumption	W	100
Current draw	A	0.85
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



Technical description


Weight	1.9 kg
Size	175 mm
Motor size	55
Rotor surface	Thick-film passivated
Impeller material	PA plastic
Housing material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Tach output - Power limiter - Motor current limitation - Soft start - PWM control input - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for motor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	≤ 3.5 mA
Motor protection	Thermal switch auto reset, internally connected
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.



EC centrifugal module - RadiCal

backward-curved, single-intake
with housing


Product drawing

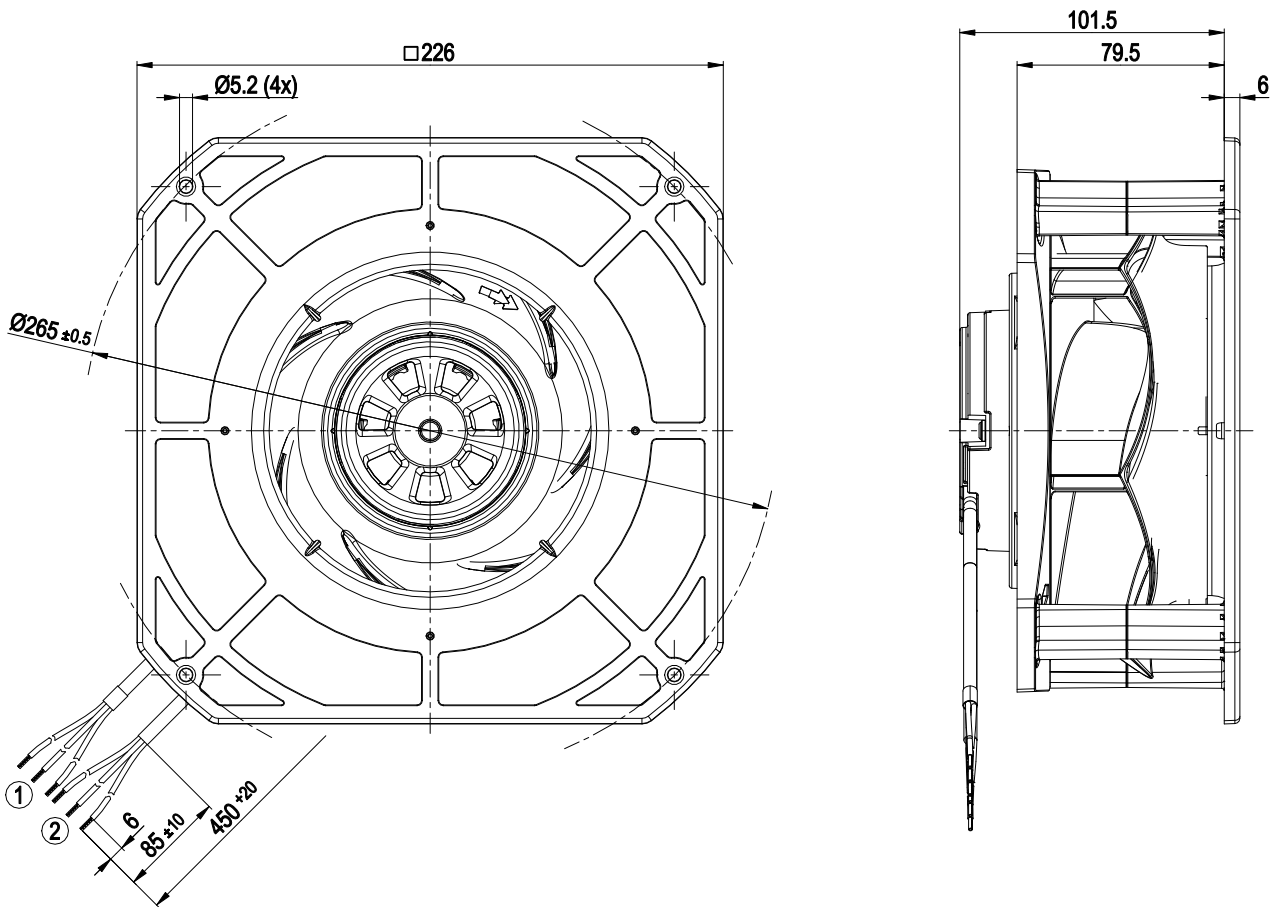

1	Cable PVC AWG20	3x splice	2	Cable PVC AWG22
	3x splice			




Mounting dimensions

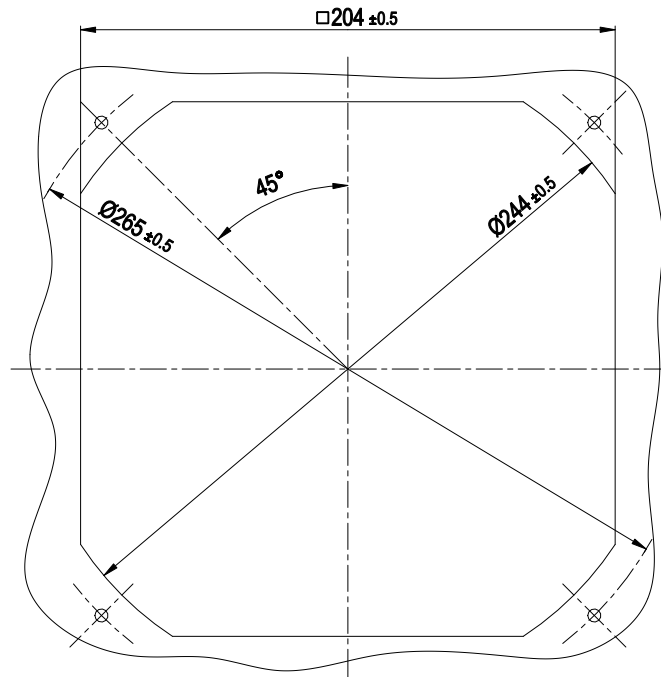


Connection diagram

Connection

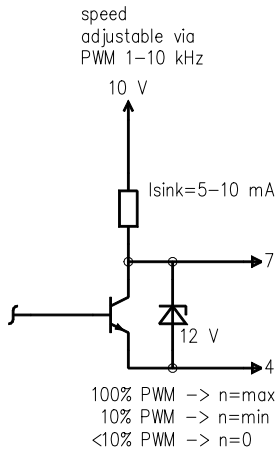


Fan/Motor

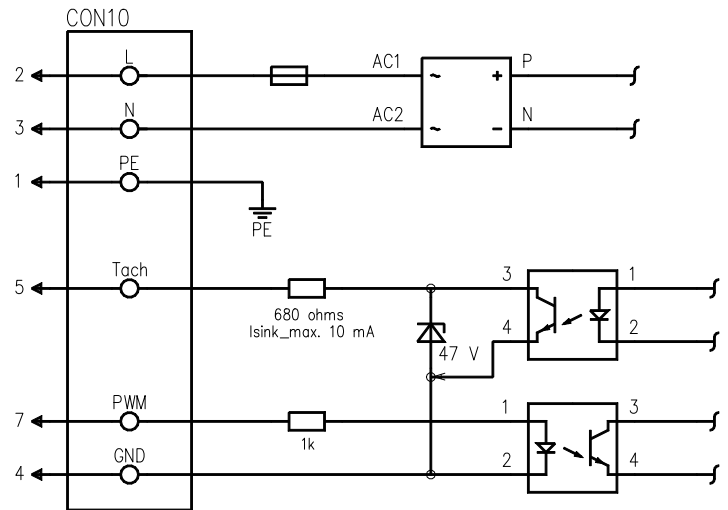

No.	Conn.	Designation	Color	Function/assignment
2	L		black	Power supply, phase, see nameplate for voltage range
3	N		blue	Power supply, neutral conductor, see nameplate for voltage range
1	PE		green/yellow	Protective earth
7	PWM		yellow	Control input PWM, impedance 1 kΩ; SELV
5	Tacho		white	Tach output, open collector, 1 pulse per revolution, $I_{\text{sink max}} = 10\text{ mA}$, SELV
4	GND		blue	Reference ground for control interface, SELV

Curves: Air performance 50 Hz

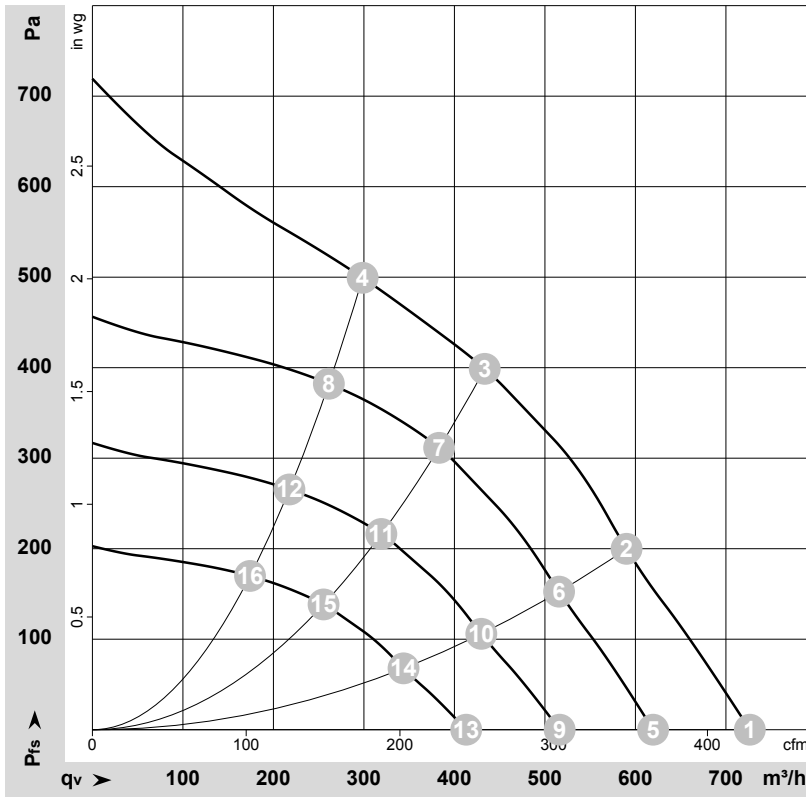

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-184410-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	230	50	4220	93	0.78	68	75	725	0	425	0.00
2	230	50	4120	100	0.83	65	72	590	200	345	0.80
3	230	50	4050	100	0.85	64	71	435	400	255	1.61
4	230	50	4115	100	0.84	66	74	300	500	175	2.01
5	230	50	3600	57	0.48			620	0	365	0.00
6	230	50	3600	67	0.56			515	152	305	0.61
7	230	50	3600	70	0.59			385	314	225	1.26
8	230	50	3600	67	0.56			260	383	155	1.54
9	230	50	3000	33	0.28			515	0	305	0.00
10	230	50	3000	39	0.32			430	105	255	0.42
11	230	50	3000	41	0.34			320	218	190	0.88
12	230	50	3000	39	0.32			220	266	130	1.07
13	230	50	2400	17	0.14			415	0	245	0.00
14	230	50	2400	20	0.17			345	67	200	0.27
15	230	50	2400	21	0.17			255	139	150	0.56
16	230	50	2400	20	0.17			175	170	100	0.68

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

