

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	K3G630-PC04-L1	
Motor	M3G150-NA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1610
Power consumption	W	5250
Current draw	A	8.1
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	67.8	59	09 Power consumption P_{ed}	kW	5.17
02 Measurement category		A		09 Air flow q_v	m ³ /h	14085
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	868
04 Efficiency grade N		70.8	62	10 Speed (rpm) n	min ⁻¹	1615
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-207717

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).

The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



Technical description

Weight	60.5 kg
Size	630 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Inlet nozzle material	Sheet steel, galvanized
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	See legend on product drawing
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.4 - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection - Vibration sensor
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket


Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 61800-5-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1



EC centrifugal module - RadiPac

backward-curved, single-intake
with support bracket

Product drawing

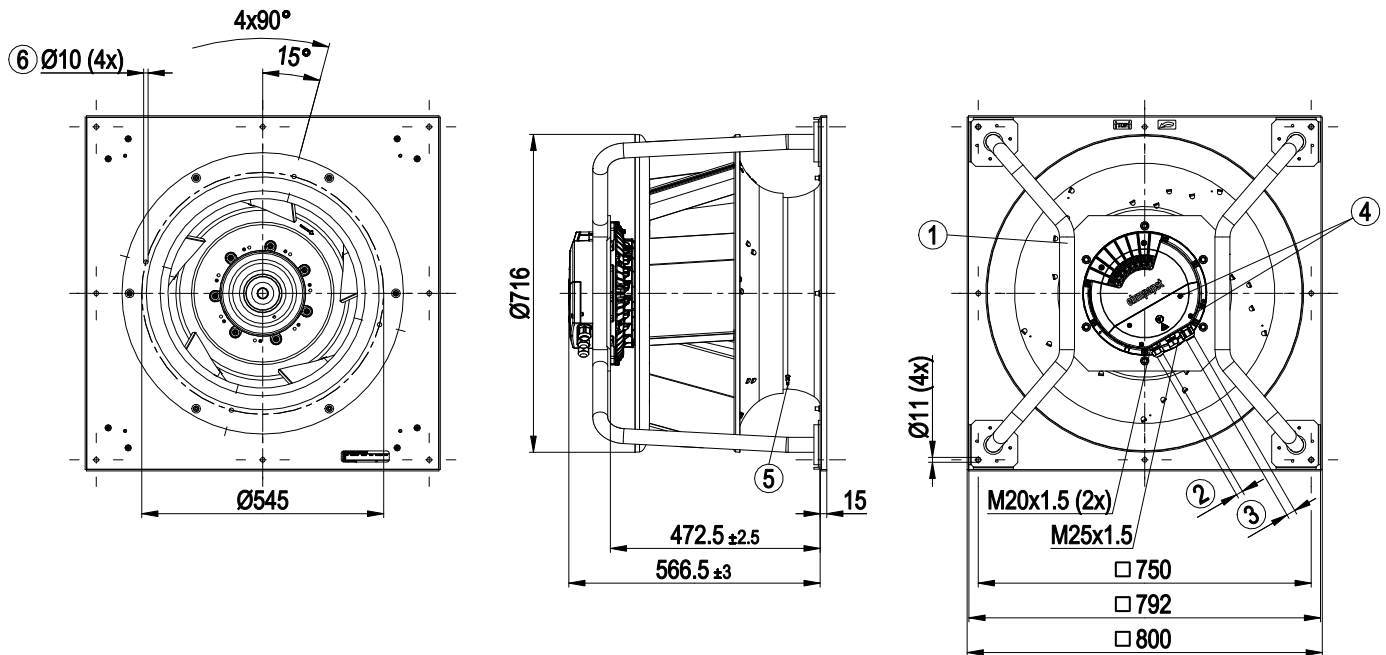


1	Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm
3	Cable diameter min. 5 mm, max. 14 mm, tightening torque 6 ± 0.9 Nm
	(The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
4	Tightening torque 3 ± 0.3 Nm
5	Inlet ring with pressure tap (k-factor: 438)
6	Attachment holes for FlowGrid 00630-2-2957 (not included in scope of delivery)

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

Connection diagram

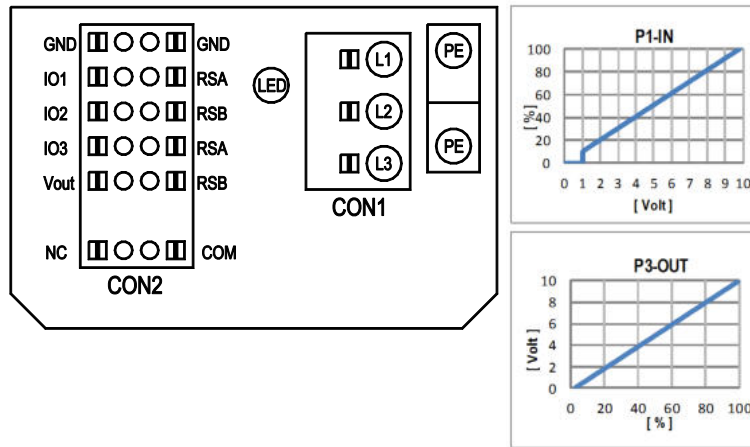

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V / PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Fan modulation level Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve



Terminal/plug assignment


configurable IO functions: normal / inverse		MODBUS Register for IO mode configuration	electrical specification	configurable IO mode		CON2	
				Din1 (active high): digital input			
IO1	○ Ain1 0-10V/PWM: analog input	RI = 100K, characteristic curve parameterizable, $f_{PWM} = 1k..10kHz$, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC	○	○	pulse output for auto-addressing	D130 [4]
	○ Tach out (open collector output)	Umax = 50VDC, Imax = 20mA SELV				signal: system modulation level %	D130 [5]
	○ Diagnostics out (open collector output)	Umax = 50VDC, Imax = 20mA SELV				signal: actual speed	D130 [2]
						signal: fan modulation level %	D130 [1]
IO2	○ Din2 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC				signal: diagnostics out (selected directly via IO mode)	D130 [0]
	○ Ain2 0-10V/PWM: analog input	RI = 100K, characteristic curve parameterizable, $f_{PWM} = 1k..10kHz$, SELV				switch: fan enable / disable	D16A [...]
	○ Ain2 4-20mA: analog input	RI = 125R, characteristic curve parameterizable, SELV				switch: set value source	D16C [...]
						switch: direction of rotation: cw / ccw	D148 [...]
IO3	○ Din3 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC				switch: control function: heating (pos.) cooling (neg.)	D12E [...]
	○ Din3 (active low): digital input	active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC				switch: parameter set: #1 / #2	D104 [...]
	○ PWMIn3: digital input idle level high	PWM = 40Hz - 10kHz characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV				source: sensor value	D147 [...]
	○ PWMIn3: digital input idle level low	40Hz - 10kHz characteristics parameterizable active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV					D101 [...]
RSA RSB	○ Aout3 0-10V: analog output	function parameterizable, max. 5mA max output frequency 300Hz SELV					
	○ Tacho out (pulses), analog output	0-10V/max. 5mA max output frequency 300Hz SELV					
	○ Diagnostics out (pulses)	0-10V/max. 5mA max output frequency 300Hz SELV					
		RS485 bus connection,	MODBUS RTU, specification V6.4, SELV				
Vout	voltage output	voltage parameterizable 3.3..24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV					
	alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage	15..50VDC					

◦ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.4



Curves: Air performance 50 Hz

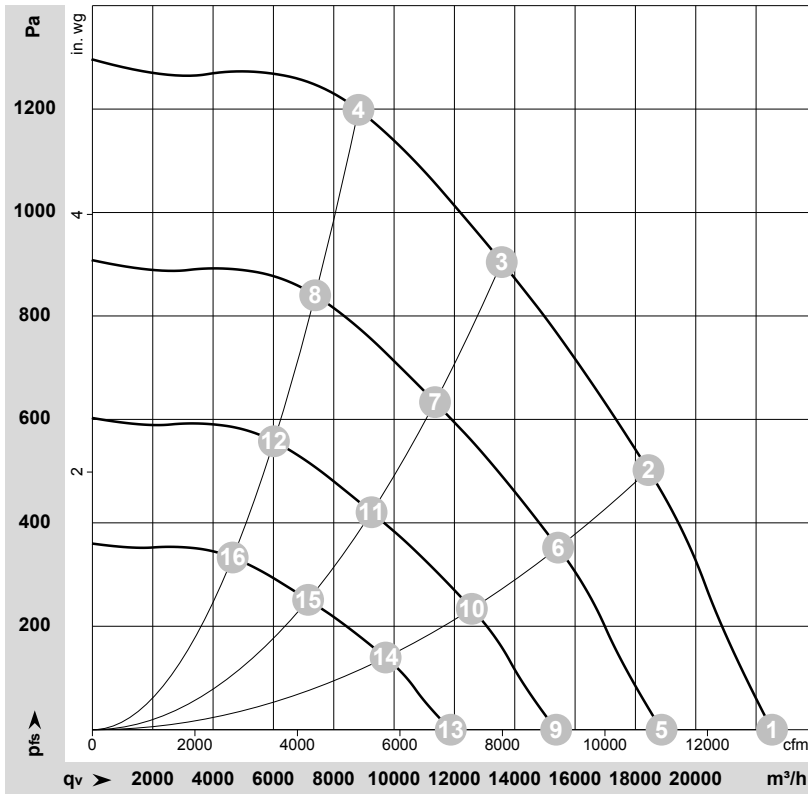

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-207717-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	3~	400	50	1610	2769	4.50	86	93	94	22530	0	13260	0.00
2	3~	400	50	1610	4407	6.88	79	86	88	18430	500	10850	2.01
3	3~	400	50	1610	5250	8.10	76	83	87	13570	900	7985	3.61
4	3~	400	50	1610	5030	7.80	79	87	91	8820	1200	5190	4.82
5	3~	400	50	1350	1626	2.64	82	89	89	18865	0	11105	0.00
6	3~	400	50	1350	2589	4.04	74	82	84	15435	352	9085	1.41
7	3~	400	50	1350	3052	4.72	72	79	82	11355	633	6685	2.54
8	3~	400	50	1350	2951	4.57	75	82	86	7385	840	4345	3.37
9	3~	400	50	1100	880	1.43	76	84	84	15375	0	9050	0.00
10	3~	400	50	1100	1400	2.19	69	77	79	12580	234	7405	0.94
11	3~	400	50	1100	1651	2.55	66	74	77	9255	421	5445	1.69
12	3~	400	50	1100	1597	2.47	70	77	81	6015	558	3540	2.24
13	3~	400	50	850	406	0.66	70	77	77	11880	0	6990	0.00
14	3~	400	50	850	646	1.01	63	70	72	9720	140	5720	0.56
15	3~	400	50	850	762	1.18	60	67	71	7150	251	4210	1.01
16	3~	400	50	850	737	1.14	63	71	74	4650	333	2735	1.34

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

