

Fan housing with guard grille

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	W3G450-ZR75-01	
Motor	M3G112-EA	

Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60

Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1910
Power consumption	W	1050
Current draw	A	1.6
Max. back pressure	Pa	390
Max. back pressure	in. wg	1.57
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	54.8	33.7	09 Power consumption P_{ed}	kW	1.01
02 Measurement category		A		09 Air flow q_v	m ³ /h	5590
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	329
04 Efficiency grade N		61.1	40	10 Speed (rpm) n	min ⁻¹	1910
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-211107

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).

The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

Technical description

Weight	11.18 kg
Size	450 mm
Motor size	112
Rotor surface	Painted black
Terminal box material	PP plastic
Electronics housing material	Die-cast aluminum, painted black
Impeller material	PP plastic
Fan housing material	PP plastic
Number of blades	5
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display - External 24 V input (parameter setting) - Alarm relay - Integrated PID controller - MODBUS V5.1 - Motor current limitation - PFC, passive - RS-485 MODBUS-RTU - Soft start - EEPROM write cycles: 100,000 maximum - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Thermal switch auto reset, internally connected
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.


W3G450-ZR75-01

EC axial panel fan - AxiEco

Fan housing with guard grille

Conformity with standards	EN 61800-5-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1

Product drawing

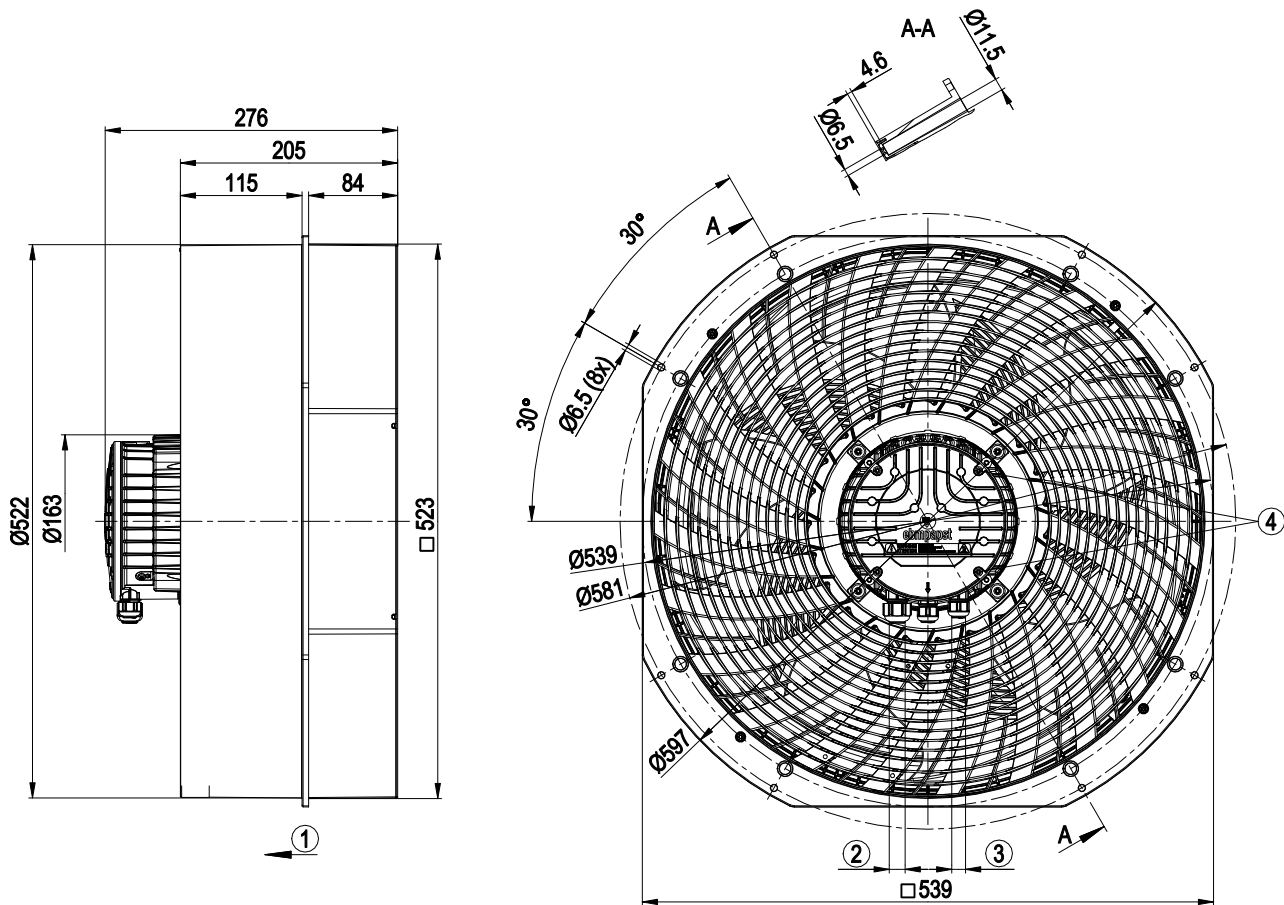


Accessory part: Guard grill 45050-2-4039 with oval head screw 60080-7-6201 (4x), can be fitted on the intake side.
Not included in scope of delivery.

The installation of accessories may change the air performance and noise values.


- | | |
|---|--|
| 1 | Airflow direction "V" |
| 2 | Cable diameter min. 8 mm, max. 12 mm, tightening torque 1.8 ± 0.3 Nm (use must be made of seal provided)
Cable diameter min. 4 mm, max. 10 mm, tightening torque 1.8 ± 0.3 Nm |
| 3 | Cable diameter min. 6 mm, max. 10 mm, tightening torque 1.8 ± 0.3 Nm (use must be made of seal provided)
Cable diameter min. 4 mm, max. 7 mm, tightening torque 1.8 ± 0.3 Nm |
| 4 | Tightening torque 1.5 ± 0.2 Nm |

Accessory part

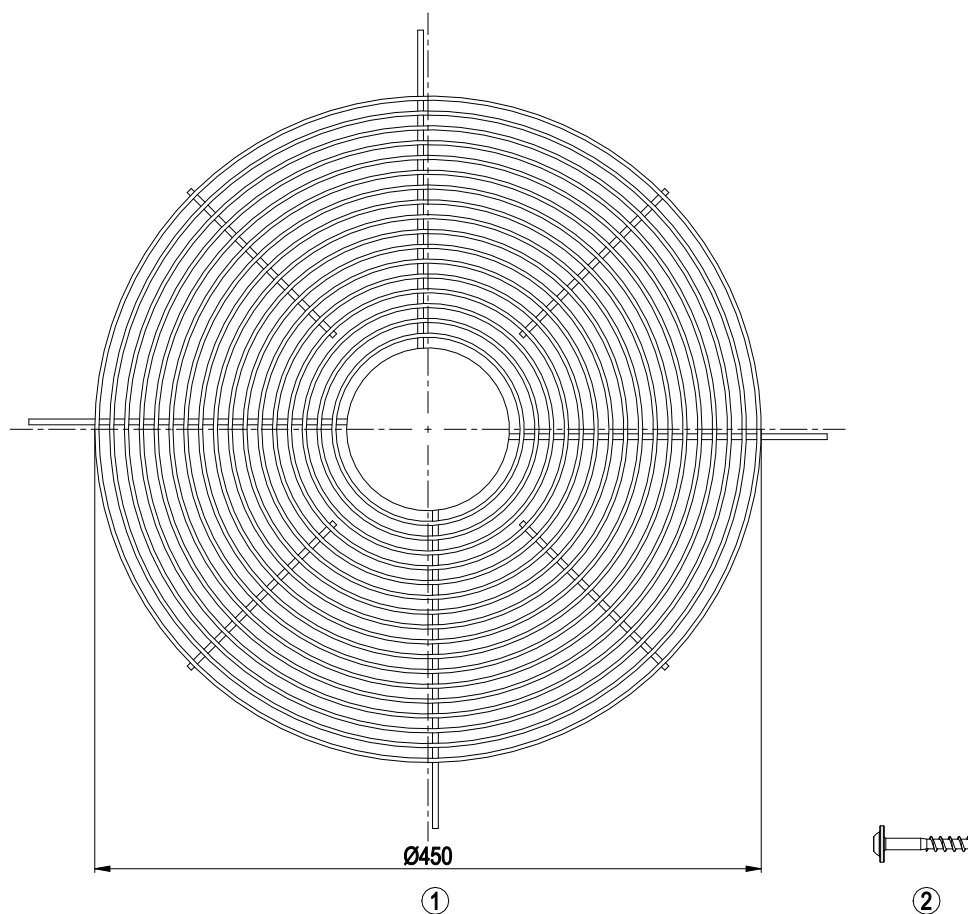

1	Guard grill 45050-2-4039
2	Oval head screw 60080-7-6201 (4x)

Mounting dimensions

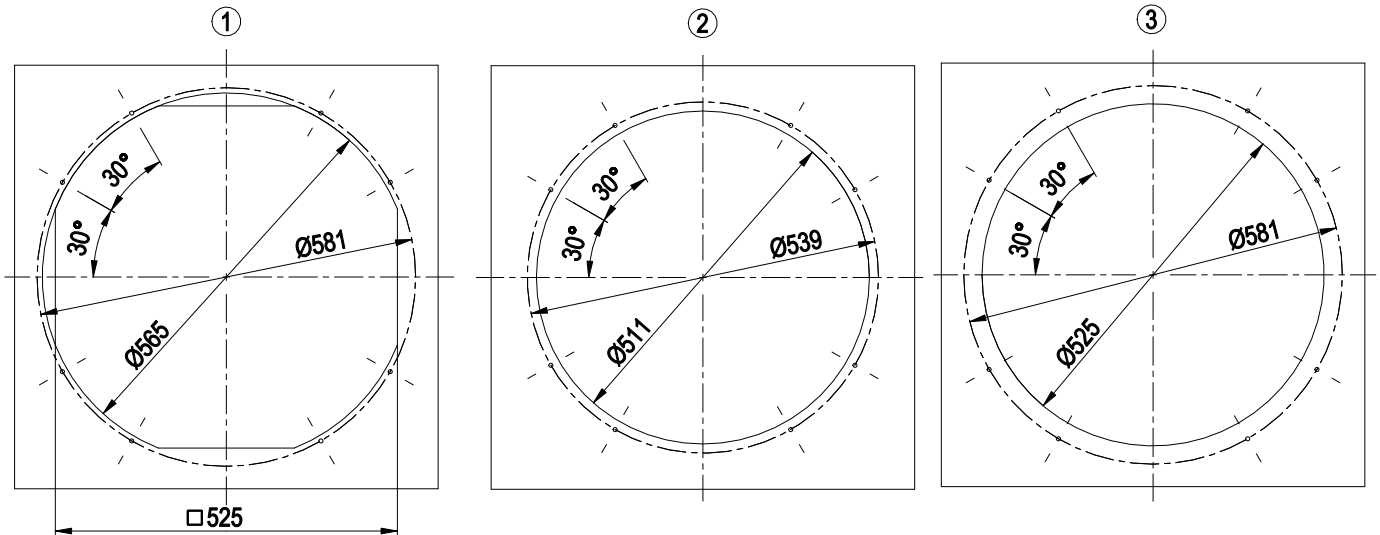

All 8 holes on the relevant pitch circle must always be used for all types of fastening.

1 intake-side mounting on flange


2 intake-side mounting on suction nozzle

The Ø6.5 mm holes must be pierced from the underside with a mandrel or similar tool.

We recommend using M6 cheese-head screws with hexagon socket (DIN 912/DIN EN ISO 4762) for fastening.


3 outlet-side mounting on flange

Connection diagram

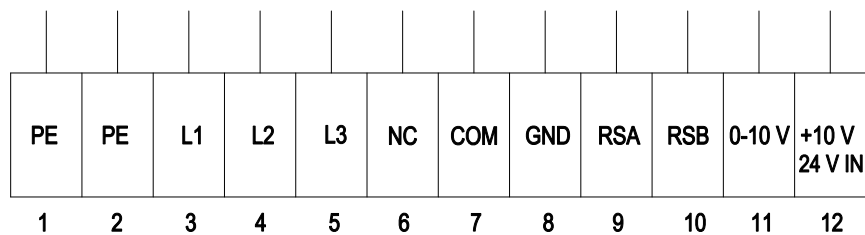

No.	Conn.	Designation	Function/assignment
1	PE	PE	Protective earth
2	PE	PE	Protective earth
3	L1	L1	Power supply
4	L2	L2	Power supply
5	L3	L3	Power supply
6	NC	NC	Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side
7	COM	COM	Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side
8	GND	GND	Reference ground for control interface, SELV
9	RSA	RSA	RS485 interface for MODBUS, RSA; SELV
10	RSB	RSB	RS485 interface for MODBUS, RSB; SELV
11	0-10 V	0-10 V	Analog input (set value) SELV, 0-10 V, Ri = 100 kΩ, adjustable curve
12	+10 V	+10 V	Fixed voltage output 10 VDC, SELV, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot); fixed voltage input 24 VDC for setting parameters via MODBUS without line voltage supply

Curves: Air performance 50 Hz

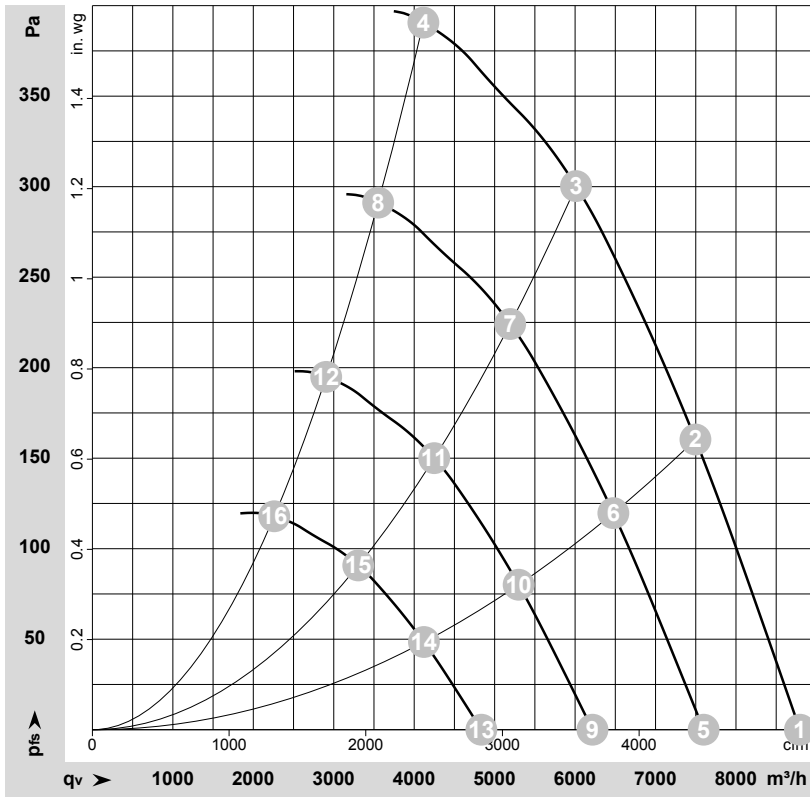

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-211107-1
Date: 2021-01-18
Nozzle: 45000-2-2943

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	3~	400	50	1910	812	1.27	76	82	85	8795	0	5175	0.00
2	3~	400	50	1910	930	1.44	74	80	83	7495	160	4410	0.64
3	3~	400	50	1910	996	1.54	74	80	83	6010	300	3540	1.20
4	3~	400	50	1910	1050	1.60	77	84	87	4115	390	2420	1.57
5	3~	400	50	1650	524	0.82	72	78	81	7600	0	4470	0.00
6	3~	400	50	1650	599	0.93	70	77	79	6475	120	3810	0.48
7	3~	400	50	1650	642	0.99	70	77	79	5195	224	3055	0.90
8	3~	400	50	1650	665	1.03	73	81	83	3550	291	2090	1.17
9	3~	400	50	1350	287	0.45	67	73	76	6215	0	3660	0.00
10	3~	400	50	1350	328	0.51	65	72	74	5300	80	3120	0.32
11	3~	400	50	1350	352	0.54	65	72	74	4250	150	2500	0.60
12	3~	400	50	1350	364	0.56	68	76	78	2905	195	1710	0.78
13	3~	400	50	1050	135	0.21	61	67	70	4835	0	2845	0.00
14	3~	400	50	1050	154	0.24	59	65	68	4120	49	2425	0.20
15	3~	400	50	1050	165	0.26	59	65	68	3305	91	1945	0.37
16	3~	400	50	1050	171	0.26	62	69	72	2260	118	1330	0.47

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase